


Ball Valves

BF, BFH, BG, BH, BO, BP, BR, BRC,
BV, BK and BU Series

Ball Valves
Plug Valves

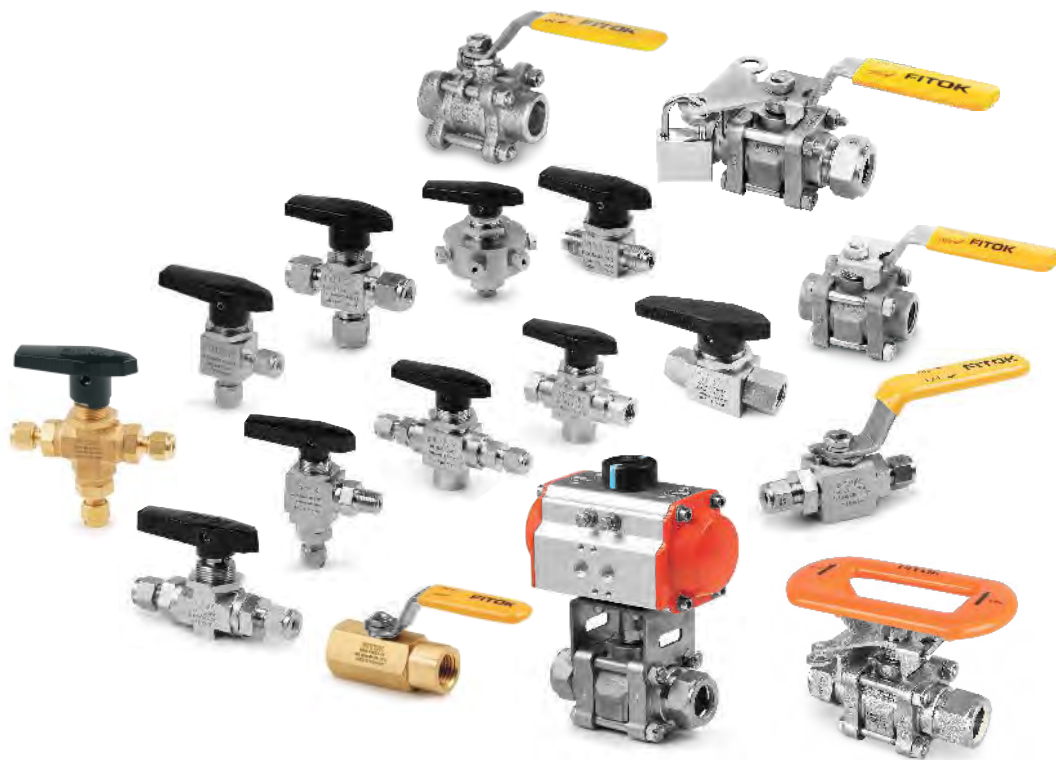

Contents

Trunnion Ball Valves

BF and BFH Series



B-04

3-Piece Ball Valves

BG Series



B-11

3-Piece Ball Valves

BH Series



B-16

One-Piece Instrumentation Ball Valves

BO Series



B-25

Bar Stock Ball Valves

BP Series



B-38

Hex Bar Stock Ball Valves

BR Series



B-46

Hex Bar Stock Ball Valves

BRC Series



B-51

High Performance Ball Valves

BV Series



B-57

High Temperature Metal-Seated Ball Valves

BK Series



B-67

Alternative Fuel Service (AFS) Ball Valves

BU Series



B-71

Important Information about Ball Valves

- ⦿ FITOK ball valves are designed to be used in fully open or fully closed position.
- ⦿ Packing adjustment may be required during the service life of the valve (except for BF, BFH and BU series).
- ⦿ For better quality maintenance, FITOK ball valves should be kept in fully open position in warehouse.
- ⦿ Valves that have not been actuated for a period of time may have a higher initial actuation torque.

Trunnion Ball Valves

BF and BFH Series



Features

- ⦿ Maximum working pressures:
 - BF Series: 6,000 psig (414 bar)
 - BFH Series: 10,000 psig (690 bar)
- ⦿ Working temperature: 0°F to 450°F (-18°C to 232°C)
- ⦿ Compact, maximum-flow design with Cv up to 1.6
- ⦿ No packing adjustment required
- ⦿ Trunnion-style ball design prevents ball blowout for enhanced safety
- ⦿ Blowout-proof stem minimizes failures caused by stem movement or looseness
- ⦿ Disc-spring-loaded seats compensate for seat wear and pressure/temperature changes, improving leak-tight integrity
- ⦿ Available in 2-way or 3-way flow patterns
- ⦿ Each valve is factory leak-tested with nitrogen or compressed air at rated pressure
- ⦿ Low-temperature service option available
- ⦿ Available with ECE R110 type approval




Pressure vs. Temperature

BF Series

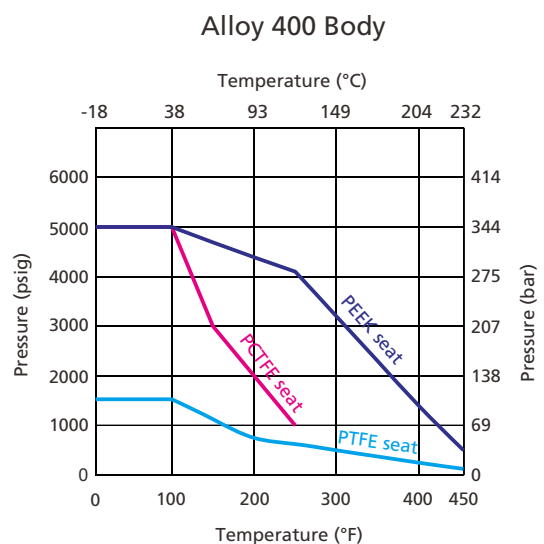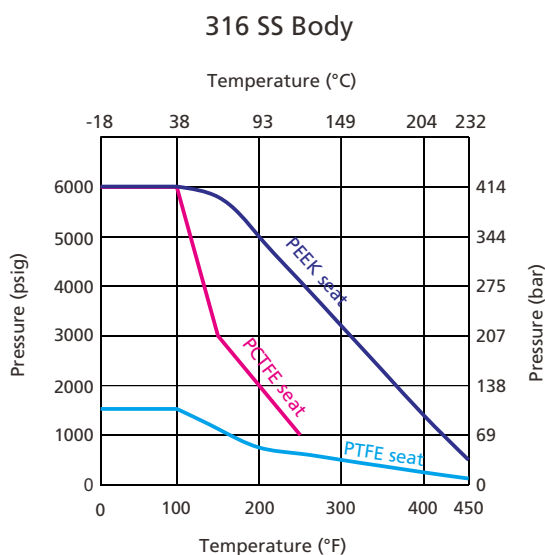

BFH Series

316 SS Body

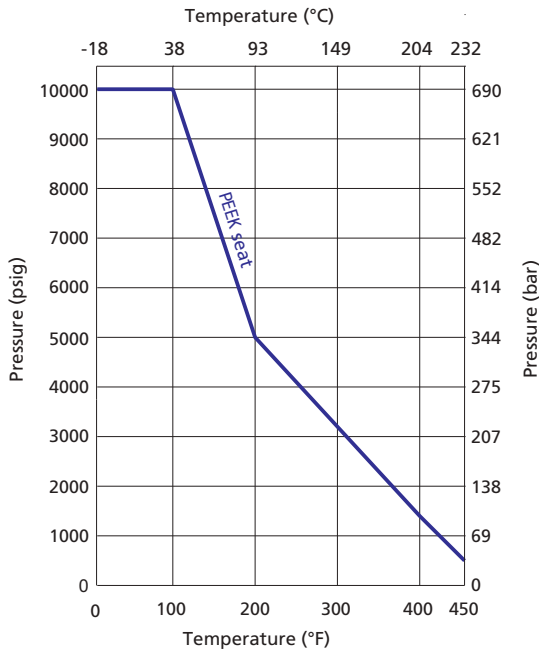

Pressure Rating@100°F (38°C)



Material	End Connection	Pressure Rating, psig (bar)
316 SS	FNS2, FNS4 FL4, ML6	10000 (690)
	ML10	8400 (578)
	FL6/ML8	7500 (516)
	FL8	6700 (461)
	ML12	6800 (470)

Note: Maximum working pressure of BFH Series ball valves is 10,000 psig. The specified pressure rating is restricted by end connections.

Ball Valves
Plug Valves

Standard Materials of Construction

BF Series

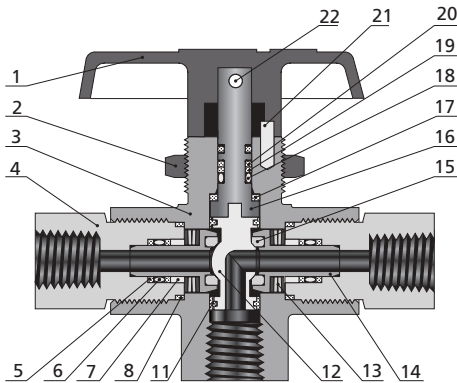
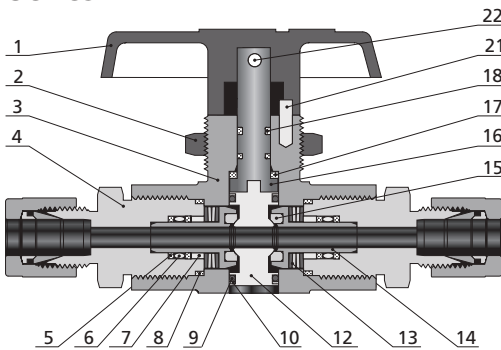


Item	Component	Valve Body Material			
		316 SS		Alloy 400	
		2-way	3-way	2-way	3-way
Material Grade/ASTM Specification					
1	Handle	Nylon with SS insert			
2	Panel Nut	316 SS/A479			
3	Body	<i>F316 SS/A182</i>		<i>Alloy 400/B164</i>	
4	End Connection	<i>316 SS/A479</i>		<i>Alloy 400/B164</i>	
5	Seat Retainer Backup Ring	<i>Reinforced PTFE</i>			
6	Seat Retainer O-ring	<i>Fluorocarbon FKM</i>			
7	Seat Retainer Guide	<i>316 SS/A479</i>		<i>Alloy 400/B164</i>	
8	End Connection Seal	<i>Silver-plated 316L/A269</i>			
9	Trunnion O-ring	<i>Fluorocarbon FKM</i>	—	<i>Fluorocarbon FKM</i>	—
10	Trunnion Backup Ring	<i>Reinforced PTFE</i>	—	<i>Reinforced PTFE</i>	—
11	Trunnion Bearing	—	<i>PEEK</i>	—	<i>PEEK</i>
12	Ball	<i>316 SS/A479</i>	<i>S21800/A479</i>	<i>Alloy 400/B164</i>	
13	Seat Spring	<i>Alloy X-750/AMS 5542</i>			
14	Seat Retainer	<i>316 SS/A479</i>		<i>Alloy 400/B164</i>	
15	Seat	<i>PTFE or PEEK or PCTFE</i>			
16	Stem	<i>316 SS/A479</i>		<i>Alloy 400/B164</i>	
17	Stem Washer	<i>PEEK</i>			
18	Stem O-ring	<i>Fluorocarbon FKM</i>	<i>Fluorocarbon FKM</i>	<i>Fluorocarbon FKM</i>	<i>Fluorocarbon FKM</i>
19	Secondary Stem Backup Ring	—	<i>PTFE/D1710</i>	—	<i>PTFE/D1710</i>
20	Primary Stem Backup Ring	—	<i>PEEK</i>	—	<i>PEEK</i>
21	Stop Pin	<i>SS</i>			
22	Set Screw	<i>Zinc-plated carbon steel</i>			
<i>Lubricants</i>		<i>Fluorinated-based</i>			

Notes: Wetted components are listed in italics.

- Ball trunnions are PTFE coated for BF series 2-way valves.
- For other materials, please contact FITOK Group or our authorized distributors.

BFH Series

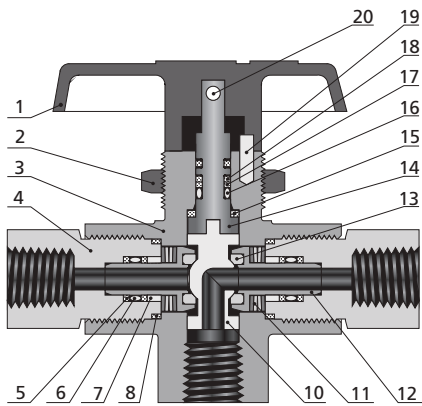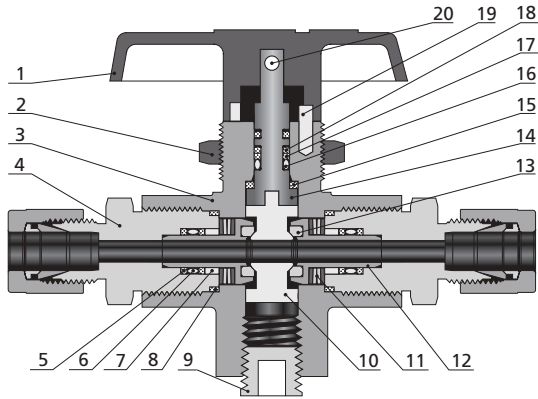

Item	Component	2-way	3-way
		Material Grade/ASTM Specification	
1	Handle	Nylon with SS insert	
2	Panel Nut	316 SS/A479	
3	Body	316 SS/A479	
4	End Connection	316 SS/A479	
5	Seat Retainer Backup Ring	Reinforced PTFE	
6	Seat Retainer O-ring	Fluorocarbon FKM	
7	Seat Retainer Guide	316 SS/A479	
8	End Connection Seal	Silver-plated 316L/A269	
9	Plug	316 SS/A479	
10	Ball	S21800/A479	
11	Seat Spring	Alloy X-750/AMS 5542	
12	Seat Retainer	316 SS/A479	
13	Seat	PEEK	
14	Stem	316 SS/A479	
15	Stem Washer	PEEK	
16	Stem O-ring	Fluorocarbon FKM	
17	Secondary Stem Backup Ring	PTFE/D1710	
18	Primary Stem Backup Ring	PEEK	
19	Stop Pin	SS	
20	Set Screw	Zinc-plated carbon steel	
<i>Lubricants</i>		<i>Fluorinated-based</i>	





Notes: Wetted components are listed in italics.

1. Ball trunnions are PTFE coated for BFH series ball valves.

2. For other materials, please contact FITOK Group or our authorized distributors.



Dimensions

2-way Valves

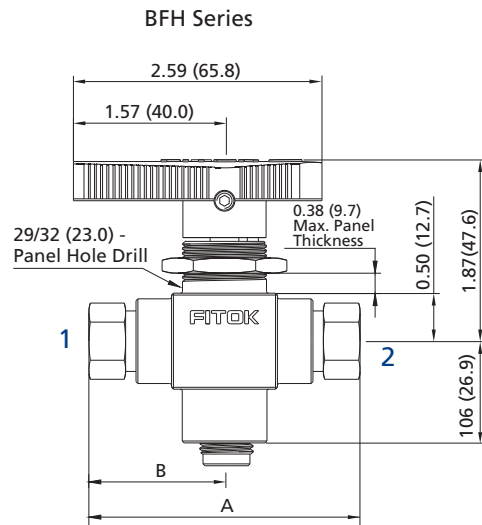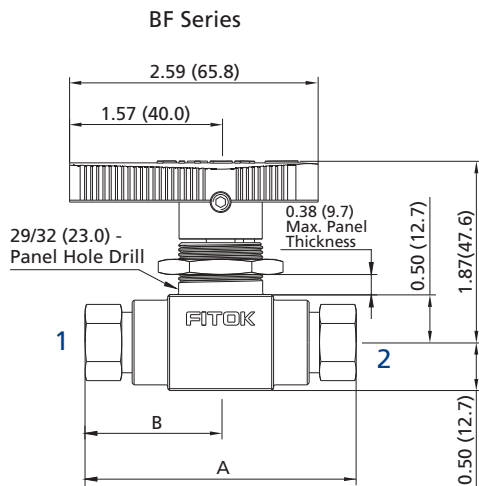

Basic Ordering Number		Connection Type and Size		Orifice in. (mm)	Cv	Dimensions, in. (mm)	
BF Series	BFH Series	Connection 1/2				A	B
BF□□-FNS2	BFH□□-FNS2-P	1/8 Female NPT		0.19 (4.8)	1.2	2.94 (74.7)	1.47 (37.3)
BF□□-FNS4	BFH□□-FNS4-P	1/4 Female NPT					
BF□□-FNS8	BFH□□-FNS4-P	1/2 Female NPT			1.0	3.93 (99.8)	1.97 (50.0)
BF□□-FL4	BFH□□-FL4-P	1/4" FITOK			1.2	4.25 (108.0)	2.13 (54.1)
BF□□-FL6	BFH□□-FL6-P	3/8" FITOK			1.6	4.14 (105.2)	2.07 (52.6)
BF□□-FL8	BFH□□-FL8-P	1/2" FITOK			1.4	4.39 (111.5)	2.19 (55.6)
BF□□-ML6	BFH□□-ML6-P	6 mm FITOK			1.0	4.60 (116.8)	2.30 (58.4)
BF□□-ML8	BFH□□-ML8-P	8 mm FITOK			1.6	4.14 (105.2)	2.07 (52.6)
BF□□-ML10	BFH□□-ML10-P	10 mm FITOK			1.5	4.15 (105.4)	2.07 (52.6)
BF□□-ML12	BFH□□-ML12-P	12 mm FITOK			1.3	4.41 (112.0)	2.20 (55.9)
					1.0	4.60 (116.8)	2.30 (58.4)

3-way Valves

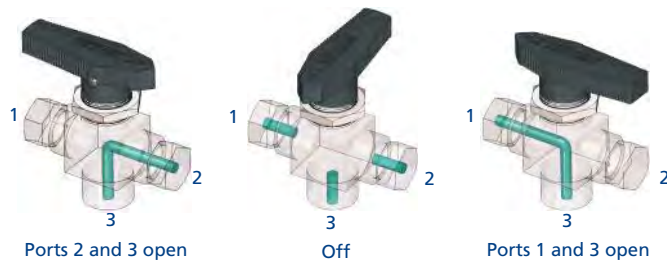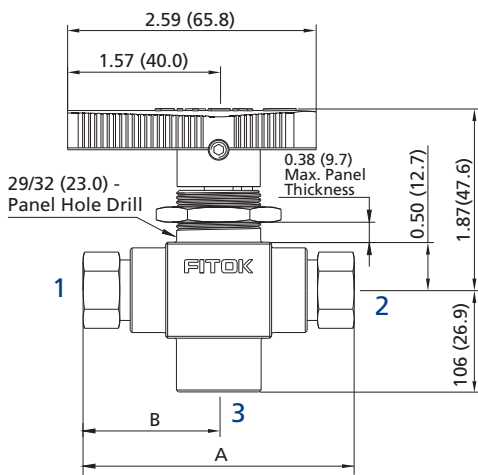

Basic Ordering Number		Connection Type and Size		Orifice in. (mm)	Cv	Dimensions, in. (mm)	
BF Series	BFH Series	Connection 1/2	Connection 3			A	B
BF□□-FNS2-3	BFH□□-FNS2-P-3	1/8 Female NPT	1/4 Female NPT	0.19 (4.8)	0.75	2.94 (74.7)	1.47 (37.3)
BF□□-FNS4-3	BFH□□-FNS4-P-3	1/4 Female NPT					
BF□□-FL4-3	BFH□□-FL4-P-3	1/4" FITOK				3.93 (99.8)	1.97 (50.0)
BF□□-FL6-3	BFH□□-FL6-P-3	3/8" FITOK				4.14 (105.2)	2.07 (52.6)
BF□□-FL8-3	BFH□□-FL8-P-3	1/2" FITOK				4.39 (111.5)	2.19 (55.6)
BF□□-ML6-3	BFH□□-ML6-P-3	6 mm FITOK				4.60 (116.8)	2.30 (58.4)
BF□□-ML8-3	BFH□□-ML8-P-3	8 mm FITOK				4.14 (105.2)	2.07 (52.6)
BF□□-ML10-3	BFH□□-ML10-P-3	10 mm FITOK				4.15 (105.4)	2.07 (52.6)
BF□□-ML12-3	BFH□□-ML12-P-3	12 mm FITOK				4.41 (112.0)	2.20 (55.9)
						4.60 (116.8)	2.30 (58.4)

1. FITOK means FITOK double ferrule tube fittings.
2. Sizes and types listed are standard. Other sizes and types are available upon request, please contact FITOK Group or our authorized distributors.
3. Dimensions are shown with tube fitting nuts finger-tightened. All dimensions are for reference only and are subject to change.
For dimensions not shown above, please contact FITOK Group or our authorized distributors.
4. Bottom port of all 3-way valves is 1/4 in. female NPT.

Special Application Ball Valves

Low-Temperature Service

BF and BFH series ball valves for low-temperature service, with a temperature rating of -40°F to 200°F (-40°C to 93°C), are available.

Low-temperature service valves have low-temperature NBR O-rings. All other materials are the same as those of standard valves. To order a valve for low-temperature service, add -LT into the valve ordering number.


For example: BFSS-FL4-P-LT

BFSS-FL4-P-3-LT


Seal kit for field replacement is available, see "Seal Kits" on Page B-09.

Low-Temperature Service BF Series Pressure vs. Temperature

316 SS Body

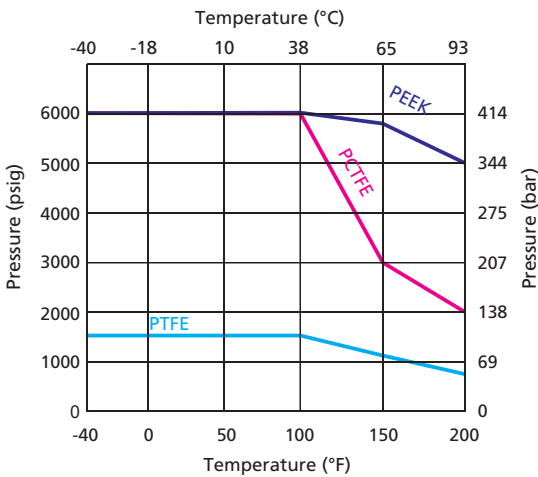


Alloy 400 Body

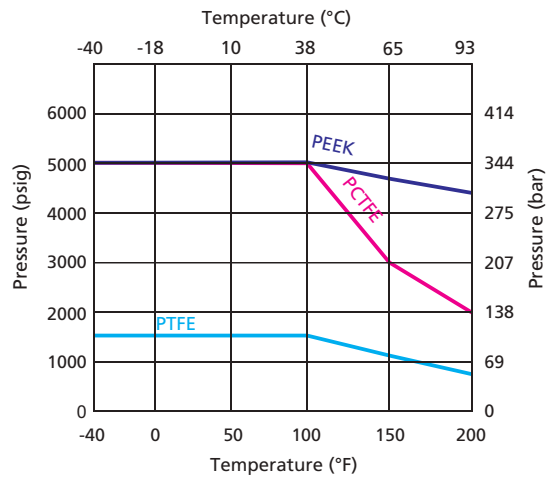

Low-Temperature Service BFH Series Pressure vs. Temperature

316 SS Body

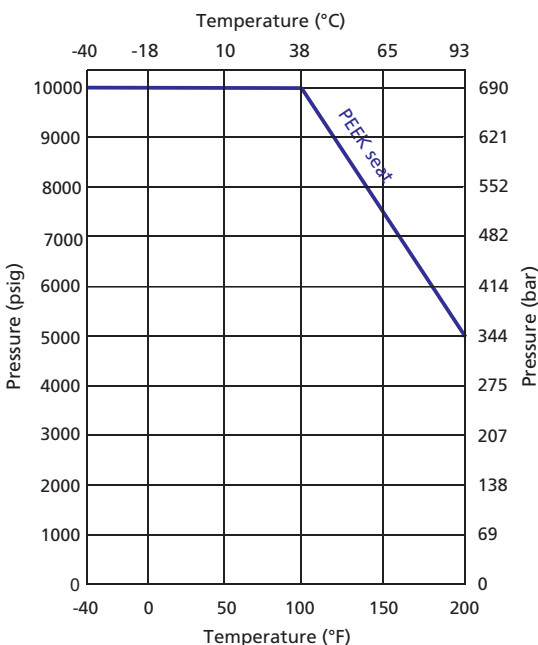

Note: The maximum working pressure for BFH series low-temperature service ball valves is the same as that of standard ball valves.


"Fast Fill" CNG Filling Station Application

BF series 3-way valves for use in "fast-fill" CNG filling station as well as a variety of filling station applications are available.

Features

- A directional installation with 90 degree actuation for ease of operation during filling
 - 3-way design with vent port for ease of venting after fill
 - PEEK seats to reduce maintenance required in high-cycle applications
 - Cycle life test report available upon request
 - Field repairable with seal kit, see "Seal Kits" on Page B-09
- To order, the flow pattern designator should be specified as "3DL" in the valve ordering number.

Example: BFSS-FNS4-P-3DL (The material and pressure vs. temperature curve are the same with those of BF series standard valves.)
 BFSS-FNS4-P-3DL-LT (The material and pressure vs. temperature curve are the same with those of BF series low-temperature service valves.)

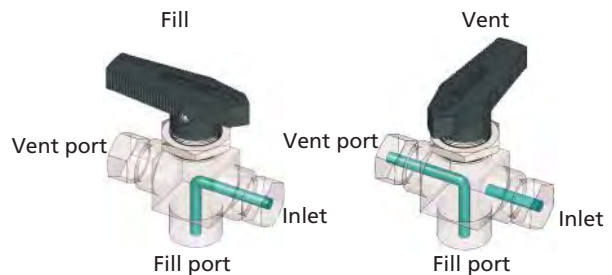

CNG/NGV Application

BF series ball valves with ECE R110 manual valve type approval available.

Classification: Class 0

Temperature rating: -40°F to 248°F (-40°C to 120°C)

Pressure rating: 3770 psig (260 bar)

CNG/NGV application valves have low-temperature FKM O-rings and PEEK seats. All other materials are the same as those of standard valves.

To order a valve for CNG/NGV application, add **-R110** into the valve ordering number.

For example: BFSS-FL4-P-**R110**

BFSS-FL4-P-3-**R110**

Seal kit for field replacement is available, see "Seal Kits" on Page B-09.

Seal Kits

Valve Series	Flow Pattern	Special Application	Basic Seal Kit Ordering Number	Content
BF	2-way	/	BFSS-2-□	Seat retainer backup ring, seat retainer O-ring, seat retainer guide, end connection seal, trunnion O-ring, trunnion backup ring, ball, seat spring, seat retainer, seat, stem, stem washer, stem O-ring, instructions.
		Low-temperature service	BFSS-2-□-LT	
		CNG/NGV application	BFSS-2-P-R110	
	3-way	/	BFSS-3-□	Seat retainer backup ring, seat retainer O-ring, seat retainer guide, end connection seal, trunnion bearing, ball, seat spring, seat retainer, seat, stem, stem washer, stem O-ring, secondary stem backup ring, primary stem backup ring, instructions.
		Low-temperature service	BFSS-3-□-LT	
		"Fast Fill" CNG filling station application	BFSS-3DL-P	
CNG/NGV application		BFSS-3DL-P-LT		
BFH	2-way	/	BFHSS-2-P	Seat retainer backup ring, seat retainer O-ring, seat retainer guide, end connection seal, ball, seat spring, seat retainer, seat, stem, stem washer, stem O-ring, secondary stem backup ring, primary stem backup ring, instructions.
		Low-temperature service	BFHSS-2-P-LT	
	3-way	/	BFHSS-3-P	
		Low-temperature service	BFHSS-3-P-LT	

Seat Material	Designator
PTFE	T
PCTFE	K
PEEK	P

1. Seal kit components are the same materials and grades listed in materials of construction.

2. To order seal kits for BF series standard and low-temperature service ball valves, select a seat designator from the table at left and add to the basic seal kit ordering number.

Example: BFSS-2-T

BFSS-2-P-LT

3. The listed basic seal kit ordering numbers specify 316 stainless steel material.

To order kits with other materials, such as Alloy 400 material, replace "SS" with "M" in the ordering number.


Example: BFM-2-T

Locking Device

⊙ Lock BF series 2-way or 3-way valves, locking hole diameter is 0.21 in (5.2 mm).

⊙ To order a ball valve with locking device, add **-L** to the valve ordering number.

Example: BFSS-ML6-L/BFSS-ML6-3-L



Ball Valve without Handle


⊙ Ball Valve without handle can be directly connected to the FITOK actuator assembly.

⊙ To order, please add **-AM** to the valve ordering number.

Example: BFSS-FL4-P-AM

Ordering Number Description

BFSS - FNS4 - ML12 - P - RXHQ3 - L - SCEF2

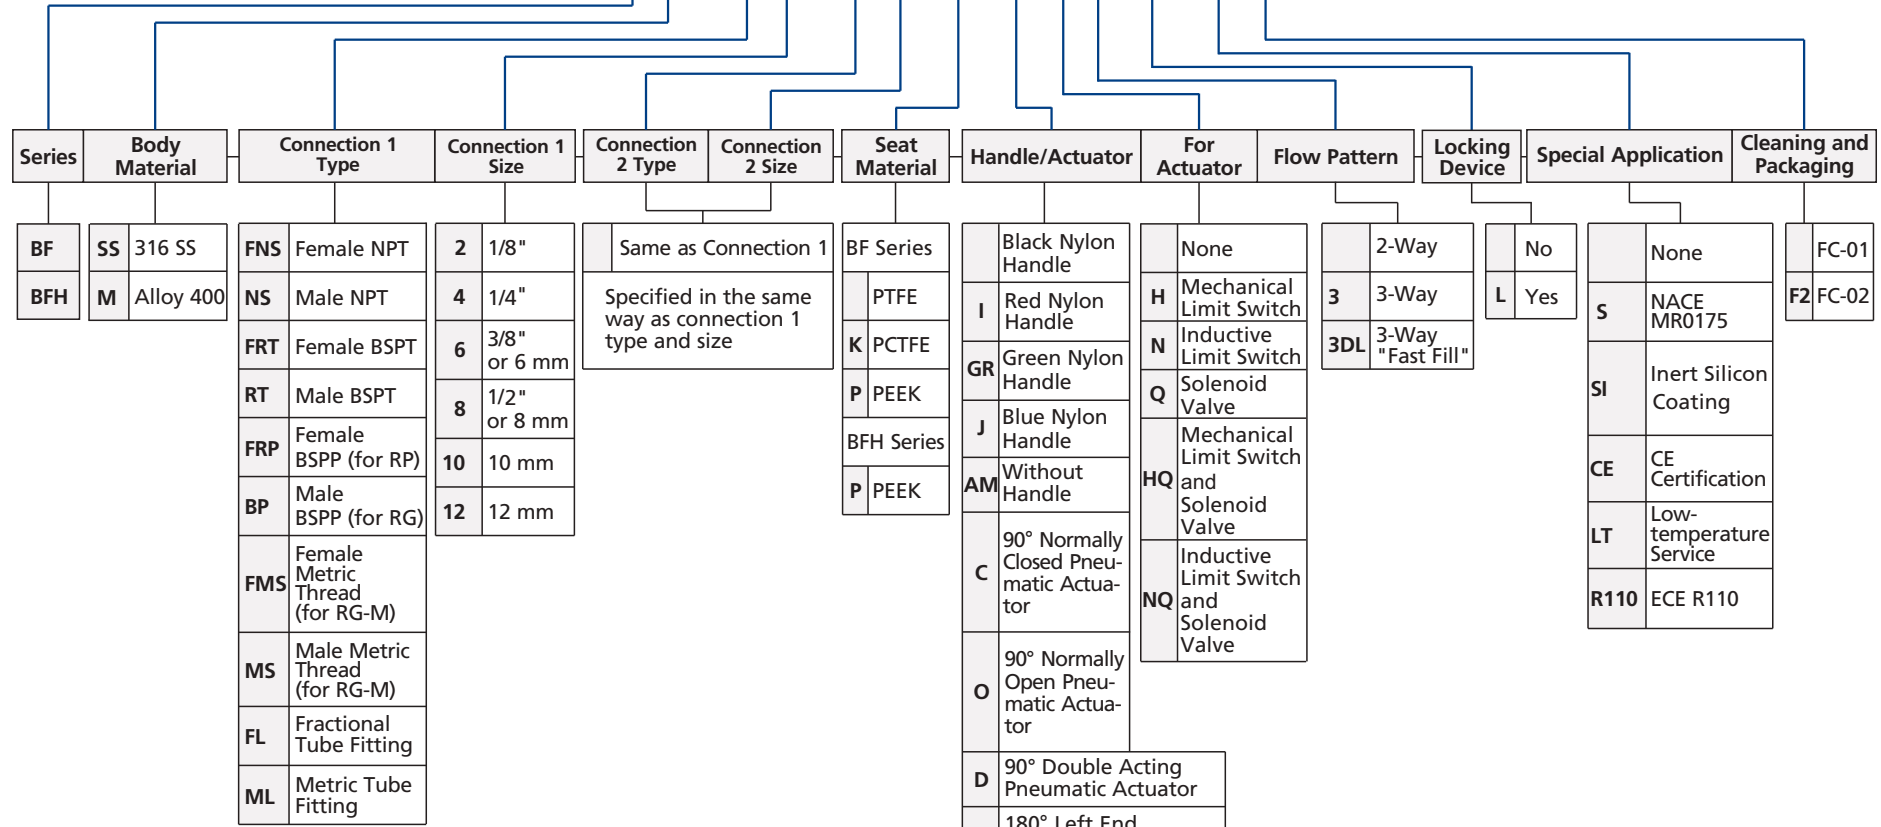

- Note: "Ordering Number Description" is a reference to understand the combination rules of FITOK product part number. Not all combinations are available.
1. Cleaning and Packaging:
 - FC-01: Standard cleaning and packaging for general industrial procedures.
 - FC-02: Special cleaning and packaging for wetted system components to ensure compliance with product cleanliness requirement of ASTM G93 Level C.
 2. For more information about pneumatically actuated ball valves, please refer to the catalog Actuated Ball Valves.
 3. Inert Silicon Coating: Except for ball valves with PEEK seat, wetted metal components Inert Silicon coated.
 4. CE certification is available. For more information, please contact FITOK group or our authorized distributors.
 5. Certifications do not include attachments to the valve, such as actuators or a different handle mechanism.

3-Piece Ball Valves


BG Series

Features

- Working pressures up to 1,000 psig (69 bar)
- Working temperature: -20°F to 450°F (-28°C to 232°C)
- Maximum-flow design with Cv up to 93
- Blowout-proof stem minimizes failures caused by stem movement or looseness
- Floating ball design compensates for seat wear, improving leak-tight integrity
- Each valve is factory leak-tested with nitrogen or compressed air at rated pressure




Pressure vs. Temperature

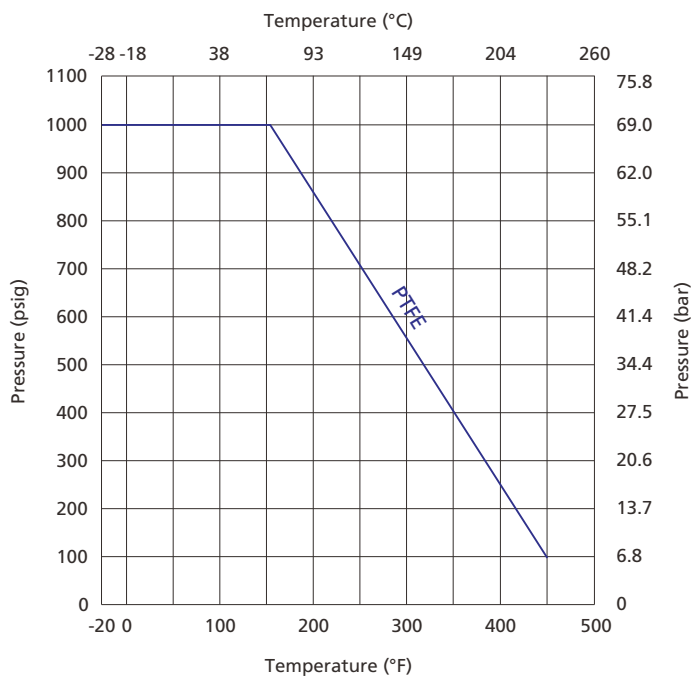

Note: The temperature and pressure rating are based on valves of standard materials.

Standard Materials of Construction



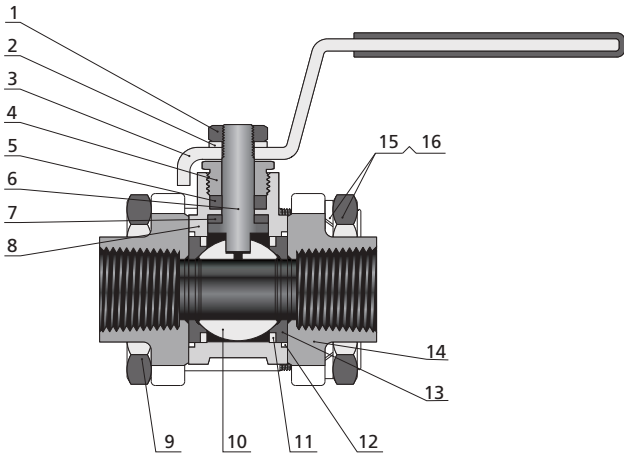


Item	Component	Valve Body Material	
		CF8M/A351	CF8/A351
1	Stem Nut	SS	
2	Gasket	SS	
3	Handle	304 SS/A240 (with vinyl sleeve)	
4	Gland	316 SS/A479 or 304 SS/A479	
5	<i>Upper Packing</i>	<i>PTFE/D1710</i>	
6	<i>Stem</i>	<i>316 SS/A479 or 304 SS/A479</i>	
7	<i>Lower Bearing</i>	<i>PTFE/D1710</i>	
8	<i>Body</i>	<i>CF8M/A351</i>	<i>CF8/A351</i>
9	Body Bolt	SS	
10	<i>Ball</i>	<i>316 SS/A479 or 304 SS/A479</i>	
11	<i>Support Ring</i>	<i>316 SS/A240 or 304 SS/A240</i>	
12	<i>Flange Seal</i>	<i>PTFE/D1710</i>	
13	<i>Seat</i>	<i>PTFE/D1710</i>	
14	<i>End Connection</i>	<i>CF8M/A351</i>	<i>CF8/A351</i>
15	Gasket	SS	
16	Nut	SS	
<i>Lubricants</i>		<i>Silicone-based and PTFE-based</i>	

Note: Wetted components are listed in italics.

For other materials, please contact FITOK Group or our authorized distributors.

Dimensions

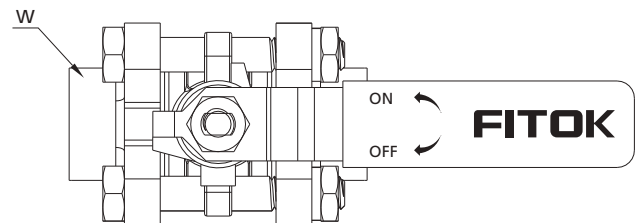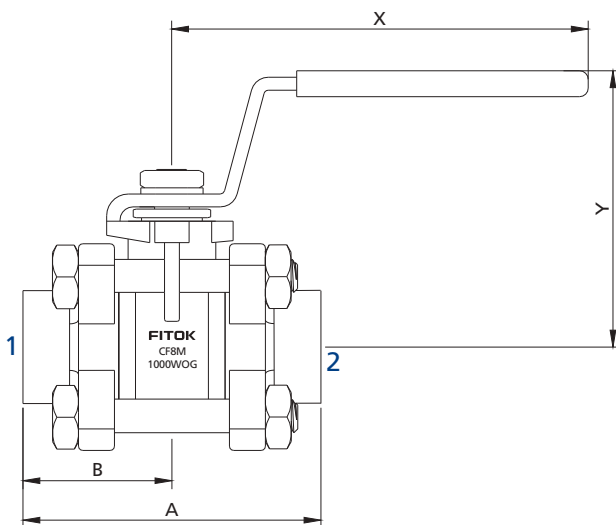

Basic Ordering Number	Connection Type and Size		Orifice in. (mm)	Cv	Dimensions, in. (mm)				
	Connection 1	Connection 2			A	B	W	X	Y
BG□□-FNS2-05	1/8 Female NPT	1/8 Female NPT	0.19 (4.8)	1.2	2.05 (52.1)	1.03 (26.0)	0.63 (16.0)	2.69 (68.3)	1.46 (37.0)
BG□□-FRP2-05	1/8 Female BSPP	1/8 Female BSPP							
BG□□-PB4-05	1/4×SCH80 Pipe Butt Weld	1/4×SCH80 Pipe Butt Weld							
BG□□-FL4-05	1/4" FITOK	1/4" FITOK			2.63 (66.8)	1.31 (33.4)			
BG□□-ML6-05	6 mm FITOK	6 mm FITOK							
BG□□-ML8-05	8 mm FITOK	8 mm FITOK							
BG□□-FNS4-07	1/4 Female NPT	1/4 Female NPT	0.28 (7.1)	3.8	2.05 (52.1)	1.03 (26.0)	0.93 (23.5)	3.94 (100.0)	2.19 (55.7)
BG□□-FRP4-07	1/4 Female BSPP	1/4 Female BSPP							
BG□□-FL6-07	3/8" FITOK	3/8" FITOK			2.63 (66.8)	1.31 (33.4)			
BG□□-ML10-07	10 mm FITOK	10 mm FITOK							
BG□□-FL8-11	1/2" FITOK	1/2" FITOK	0.42 (10.6)	7.5	4.04 (103.0)	2.02 (51.3)			
BG□□-ML12-11	12 mm FITOK	12 mm FITOK							
BG□□-ML14-11	14 mm FITOK	14 mm FITOK							
BG□□-FNS6-13	3/8 Female NPT	3/8 Female NPT	0.50 (12.7)	11.3	2.57 (65.2)	1.28 (32.6)	0.93 (23.5)	3.94 (100.0)	2.19 (55.7)
BG□□-FRP6-13	3/8 Female BSPP	3/8 Female BSPP							
BG□□-PS6-13	3/8 PS	3/8 PS							
BG□□-PB8-13	1/2×SCH80 Pipe Butt Weld	1/2×SCH80 Pipe Butt Weld							
BG□□-FL10-13	5/8" FITOK	5/8" FITOK			4.04 (103.0)	2.02 (51.3)			
BG□□-ML16-13	16 mm FITOK	16 mm FITOK							
BG□□-FNS8-15	1/2 Female NPT	1/2 Female NPT	0.55 (14.0)	13.0	2.74 (69.5)	1.37 (34.8)	1.06 (27.0)	3.94 (100.0)	2.26 (57.5)
BG□□-FRP8-15	1/2 Female BSPP	1/2 Female BSPP							
BG□□-PS8-15	1/2 PS	1/2 PS							
BG□□-MTB22-15	22×3 mm Tube Butt Weld	22×3 mm Tube Butt Weld							
BG□□-TS12-15	3/4" TS	3/4" TS							
BG□□-MTS18-15	18 mm Tube Socket Weld	18 mm Tube Socket Weld			4.04 (103.0)	2.02 (51.3)			
BG□□-FL12-15	3/4" FITOK	3/4" FITOK							
BG□□-ML18-15	18 mm FITOK	18 mm FITOK							
BG□□-FNS12-20	3/4 Female NPT	3/4 Female NPT			0.79 (20.0)	50.0	3.15 (80.0)	1.57 (40.0)	1.34 (34.0)
BG□□-FRP12-20	3/4 Female BSPP	3/4 Female BSPP							

Basic Ordering Number	Connection Type and Size		Orifice in. (mm)	Cv	Dimensions, in. (mm)				
	Connection 1	Connection 2			A	B	W	X	Y
BG□□-PB12-20	3/4×SCH80 Pipe Butt Weld	3/4×SCH80 Pipe Butt Weld	0.79 (20.0)	34	3.15 (80.0)	1.57 (40.0)	1.34 (34.0)	5.18 (131.5)	2.66 (67.5)
BG□□-PS12-20	3/4 PS	3/4 PS							
BG□□-TS16-20	1" TS	1" TS							
BG□□-MTB25-20	25×3.5 mm Tube Butt Weld	25×3.5 mm Tube Butt Weld							
BG□□-MTS25-20	25 mm Tube Socket Weld	25 mm Tube Socket Weld			5.12 (130.0)	2.56 (65.0)	1.57 (40.0)	5.95 (151.2)	3.08 (78.2)
BG□□-FL16-20	1" FITOK	1" FITOK							
BG□□-ML22-20	22 mm FITOK	22 mm FITOK							
BG□□-ML25-20	25 mm FITOK	25 mm FITOK							
BG□□-FNS16-25	1 Female NPT	1 Female NPT	0.98 (25.0)	65	3.54 (90.0)	1.77 (45.0)	1.57 (40.0)	5.95 (151.2)	3.08 (78.2)
BG□□-FRP16-25	1 Female BSPP	1 Female BSPP							
BG□□-PS16-25	1 PS	1 PS							
BG□□-PB16-25	1×SCH80 Pipe Butt Weld	1×SCH80 Pipe Butt Weld							

1. FITOK means FITOK double ferrule tube fittings, TS means fractional tube socket weld, MTS means metric tube socket weld, TB means fractional tube butt weld, MTB means metric tube butt weld, PS means pipe socket weld, and PB means pipe butt weld.
2. Butt welding ends are manually welded. For connections with orbital welding, please contact FITOK Group or our authorized distributors.
3. Sizes and types listed are standard. Other sizes and types are available upon request, please contact FITOK Group or our authorized distributors.
4. Dimensions are shown with tube fitting nuts finger-tightened. All dimensions are for reference only and are subject to change. For dimensions not shown above, please contact FITOK Group or our authorized distributors.

Seal Kits

Valve Orifice	Basic Seal Kit Ordering Number	Content
05/07	T-BG-2-RK	Seat, flange seal, lower packing, upper packing, instructions
11/13	T-BG-4-RK	
15	T-BG-6-RK	
20	T-BG-12-RK	
25	T-BG-16-RK	Seat, flange seal, stem bearing, packing support, lower packing, upper packing, instructions

Locking Device

- ⦿ Lock BG series valves, locking hole diameters of:
 - valves with orifice 05 or 07 are 0.185 in (4.7 mm);
 - valves with orifice 11, 13, 15, or 20 are 0.22 in (5.7 mm);
 - valves with orifice 25 are 0.19 in (4.8 mm)
- ⦿ To order a ball valve with locking device, add -L to the valve ordering number.
Example: BGSS-FRT8-15-L




Diagram of Ball Valves with Locking Device and Orifice 05, 07, 11, 13, 15, or 20





Diagram of Ball Valves with Locking Device and Orifice 25

Ordering Number Description

BGSS - FNS8 - ML18 - 15 - L - SF2

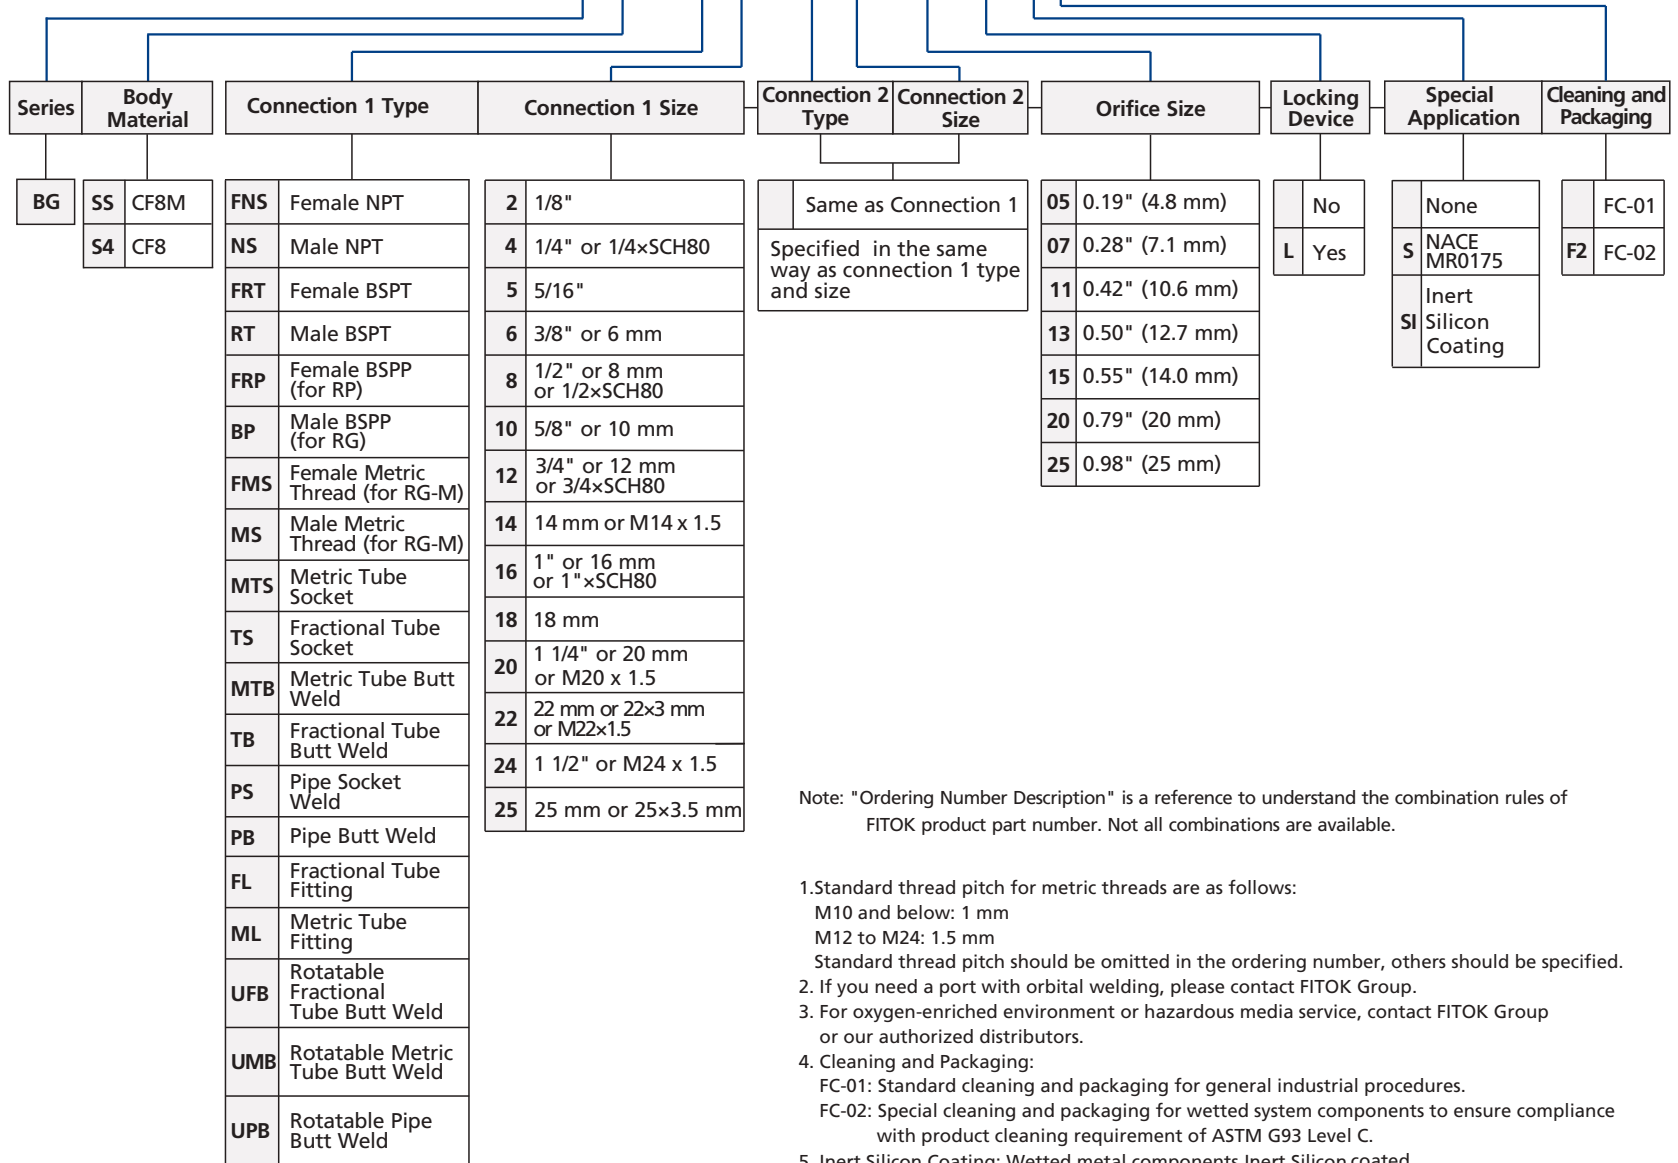

Note: "Ordering Number Description" is a reference to understand the combination rules of FITOK product part number. Not all combinations are available.


- Standard thread pitch for metric threads are as follows:
M10 and below: 1 mm
M12 to M24: 1.5 mm
Standard thread pitch should be omitted in the ordering number, others should be specified.
- If you need a port with orbital welding, please contact FITOK Group.
- For oxygen-enriched environment or hazardous media service, contact FITOK Group or our authorized distributors.
- Cleaning and Packaging:
FC-01: Standard cleaning and packaging for general industrial procedures.
FC-02: Special cleaning and packaging for wetted system components to ensure compliance with product cleaning requirement of ASTM G93 Level C.
- Inert Silicon Coating: Wetted metal components Inert Silicon coated.

3-Piece Ball Valves

BH Series

Features


- ⦿ Working pressures up to 3,000 psig (207 bar)
- ⦿ Working temperature: -20°F to 450°F (-28°C to 232°C)
- ⦿ Maximum-flow design with Cv up to 130
- ⦿ Floating ball design paired with disc-spring-loaded seats to compensate for seat wear and pressure/temperature changes, improving leak-tight integrity
- ⦿ Blowout-proof stem minimizes failures caused by stem movement or looseness
- ⦿ Available in 2-way or 3-way flow patterns
- ⦿ Each valve is factory leak-tested with nitrogen or compressed air at rated pressure
- ⦿ Fire-safe ball valves available
- ⦿ Low-temperature service option available

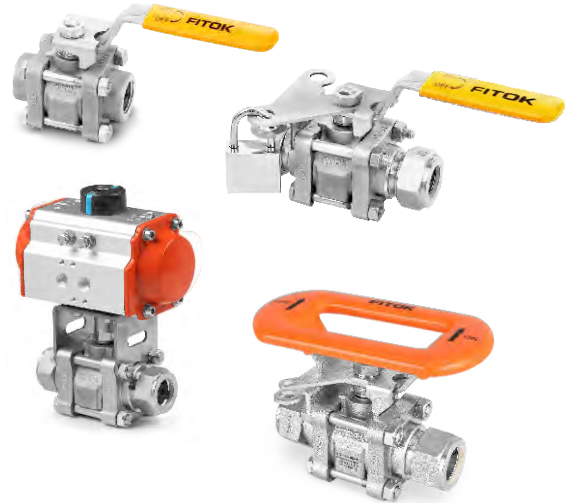


Pressure vs. Temperature

2-way Valves


Orifice Size: 0.19", 0.28", 0.41", 0.52" & 0.88"

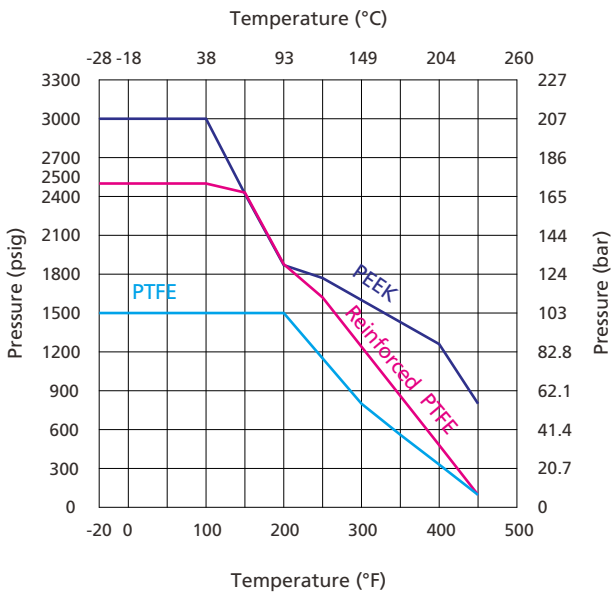

Orifice Size: 1.13", 1.25" & 1.50"


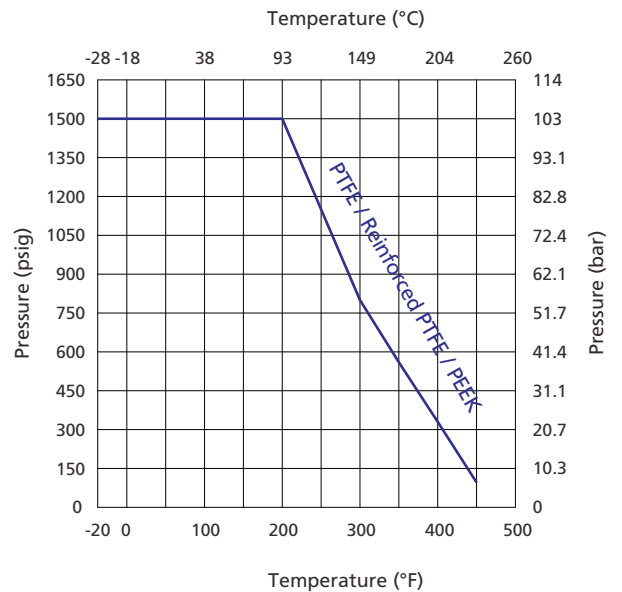


3-way Valves

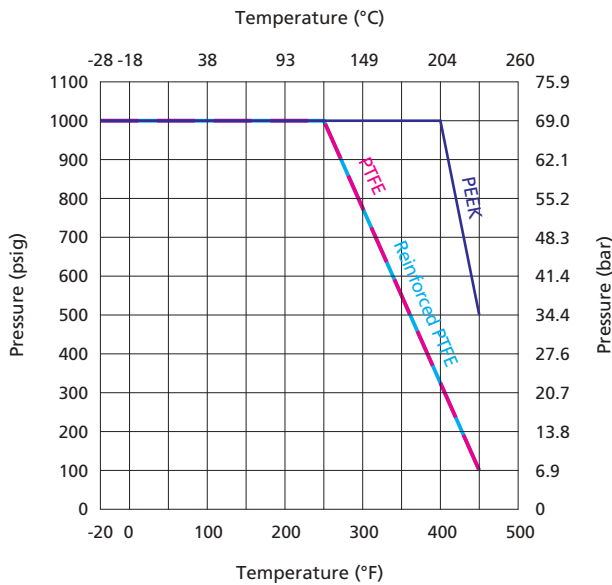

Note: The temperature and pressure rating are based on valves of standard materials.

Standard Materials of Construction

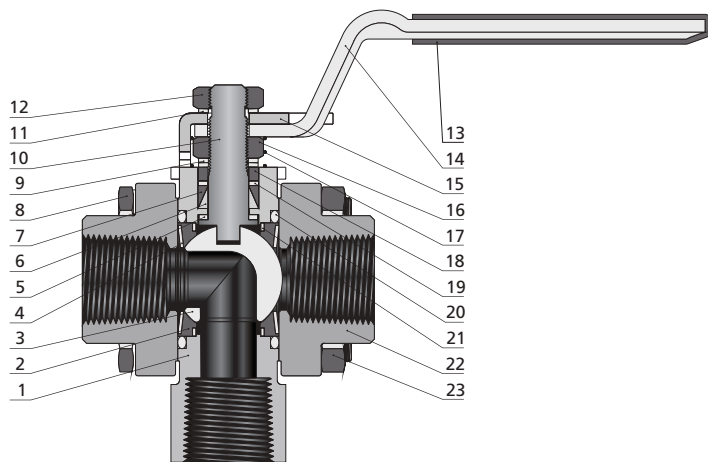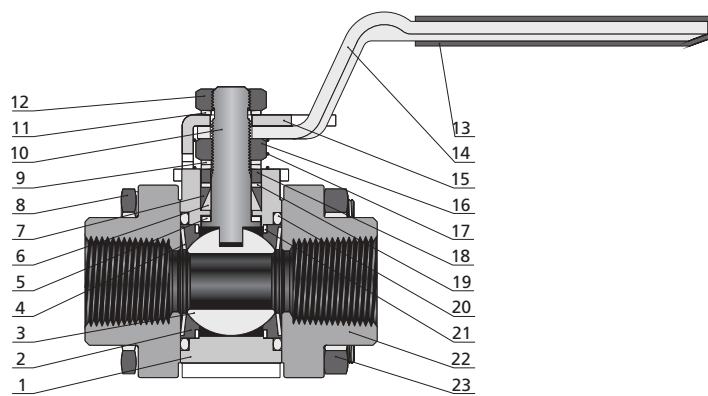


Item	Component	Material Grade/ASME Specification	
1	Body	<i>CF8M/A351</i>	<i>CF8/A351</i>
2	Seat	<i>PTFE or Reinforced PTFE or PEEK</i>	
3	Ball	<i>316 SS/A479</i>	
4	Coned-disc Spring	<i>Strain-hardened 316 SS/A240</i>	
5	Stem Bearing	<i>PEEK</i>	
6	Lower Packing	<i>Reinforced PTFE</i>	
7	Upper Packing	<i>Reinforced PTFE</i>	
8	Body Bolt	<i>Gr. B8M/A193</i>	
9	Stem Spring	<i>Strain-hardened 316 SS/A240</i>	
10	Stem	<i>316 SS/A479</i>	
11	Stem Spring	<i>Strain-hardened 316 SS/A240</i>	
12	Stem Nut	<i>Gr. 8M/A194</i>	
13	Handle Sleeve	<i>Vinyl</i>	
14	Handle	<i>304 SS/A240</i>	
15	Stop Plate	<i>304 SS/A240</i>	
16	Stem Nut	<i>Gr. 8M/A194</i>	
17	Grounding Spring	<i>302 SS/A313</i>	
18	Gland	<i>PTFE-coated 316 SS/A479</i>	
19	Packing Support	<i>PEEK</i>	
20	Flange Seal	<i>PTFE/D1710</i>	
21	Support Ring	<i>316 SS/A240</i>	
22	End Connection	<i>CF8M/A351</i>	<i>CF8/A351</i>
23	Body Nut	<i>Gr.8M/A194</i>	
	Lubricants	<i>Silicone-based and PTFE-based</i>	



Note: Wetted components are listed in italics. For other materials, please contact FITOK Group or our authorized distributors.

Dimensions

2-way Valves

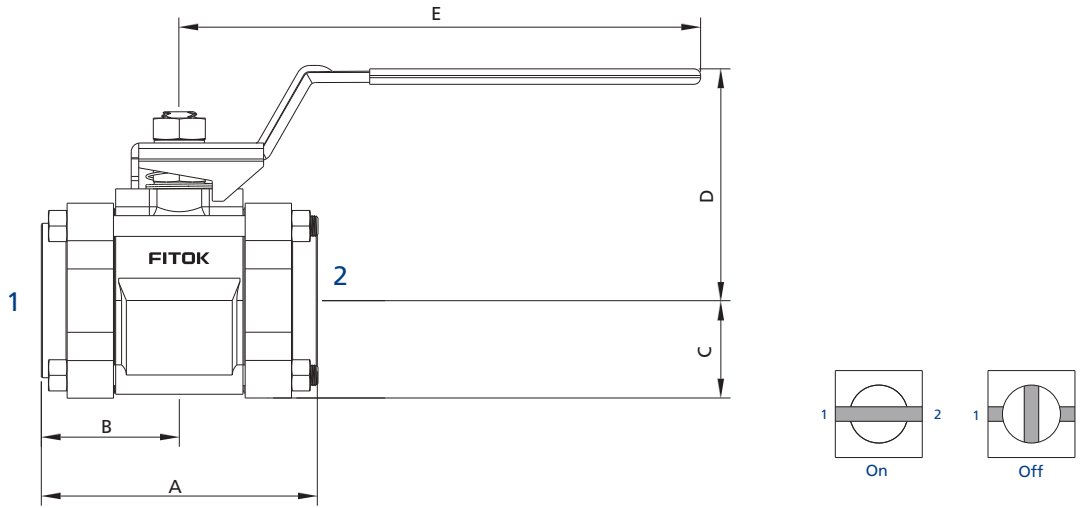

3-way Valves

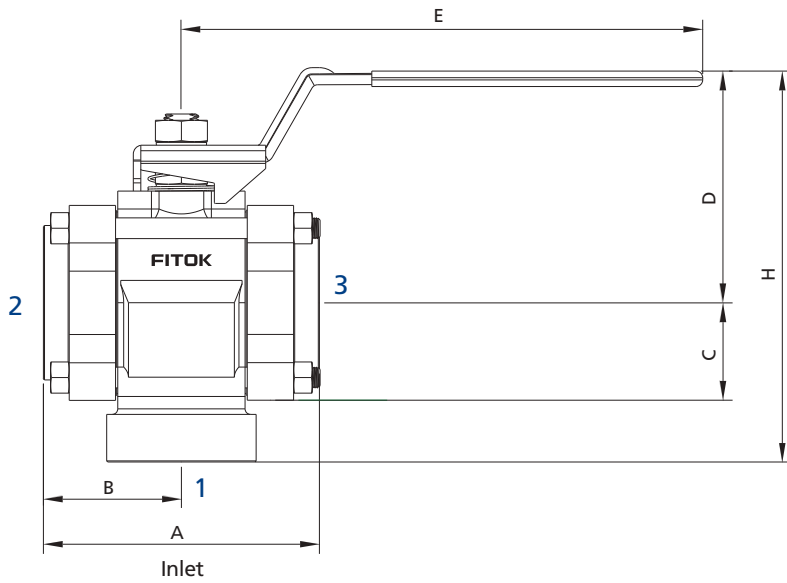

Port 1 to port 2



Port 1 to port 3

Basic Ordering Number		Connection Type and Size		Orifice in. (mm)		Cv		Dimensions, in. (mm)														
2-way	3-way	Connection 1	Connection 2/3	2-way	3-way	2-way	3-way	A	B	C	D	E	H									
BH□□-FL4-05	BH□□-FL4-05-3	1/4" FITOK	1/4" FITOK	0.19 (4.8)	0.19 (4.8)	1.2	1.2	3.17 (80.5)	1.59 (40.4)	0.68 (17.3)	1.66 (42.2)	2.37 (60.2)	3.35 (85.1)									
BH□□-ML6-05	BH□□-ML6-05-3	6 mm FITOK	6 mm FITOK																			
BH□□-ML8-05	BH□□-ML8-05-3	8 mm FITOK	8 mm FITOK																			
BH□□-TS4-05	—	1/4" TS	1/4" TS		—	1.2	—	2.16 (54.9)	1.08 (27.4)	—	—	—										
BH□□-MTS6-05	—	6 mm Tube Socket Weld	6 mm Tube Socket Weld																			
BH□□-PB4-05	—	1/4×SCH80 Pipe Butt Weld	1/4×SCH80 Pipe Butt Weld																			
BH□□-FNS2-07	BH□□-FNS2-07-3	1/8 Female NPT	1/8 Female NPT	0.28 (7.1)	0.28 (7.1)	3.8	1.7	2.16 (54.9)	1.08 (27.4)	0.68 (17.3)	1.66 (42.2)	2.37 (60.2)	3.12 (79.2)									
BH□□-FRT2-07	BH□□-FRT2-07-3	1/8 Female BSPT	1/8 Female BSPT																			
BH□□-FRP2-07	BH□□-FRP2-07-3	1/8 Female BSPP	1/8 Female BSPP																			
BH□□-FNS4-07	BH□□-FNS4-07-3	1/4 Female NPT	1/4 Female NPT																			
BH□□-FRT4-07	BH□□-FRT4-07-3	1/4 Female BSPT	1/4 Female BSPT																			
BH□□-FRP4-07	BH□□-FRP4-07-3	1/4 Female BSPP	1/4 Female BSPP																			
BH□□-FL6-07	BH□□-FL6-07-3	3/8" FITOK	3/8" FITOK											3.17 (80.5)	1.59 (40.4)	—	—	—	—	—	—	4.37 (111)
BH□□-ML10-07	BH□□-ML10-07-3	10 mm FITOK	10 mm FITOK																			
BH□□-TS6-07	—	3/8" TS	3/8" TS											—	—	—	2.16 (54.9)	1.08 (27.4)	—	—	—	—
BH□□-PB6-07	—	3/8×SCH80 Pipe Butt Weld	3/8×SCH80 Pipe Butt Weld																			
BH□□-FL8-10	BH□□-FL8-10-3	1/2" FITOK	1/2" FITOK	0.41 (10.4)	0.41 (10.4)	7.5	3.5	4.04 (103)	2.02 (51.3)	0.89 (22.6)	2.35 (59.7)	4.50 (114)	4.48 (114)									
BH□□-ML12-10	BH□□-ML12-10-3	12 mm FITOK	12 mm FITOK																			
BH□□-TS8-10	—	1/2" TS	1/2" TS																			
BH□□-FNS6-13	BH□□-FNS6-13-3	3/8 Female NPT	3/8 Female NPT	0.52 (13.1)	0.52 (13.1)	12.0	5.0	2.70 (68.6)	1.35 (34.3)	—	—	—	4.19 (106)									
BH□□-FRT6-13	BH□□-FRT6-13-3	3/8 Female BSPT	3/8 Female BSPT																			
BH□□-FRP6-13	BH□□-FRP6-13-3	3/8 Female BSPP	3/8 Female BSPP																			
BH□□-FNS8-13	BH□□-FNS8-13-3	1/2 Female NPT	1/2 Female NPT																			
BH□□-FRT8-13	BH□□-FRT8-13-3	1/2 Female BSPT	1/2 Female BSPT																			
BH□□-FRP8-13	BH□□-FRP8-13-3	1/2 Female BSPP	1/2 Female BSPP																			
BH□□-FL12-13	BH□□-FL12-13-3	3/4" FITOK	3/4" FITOK											4.04 (103)	2.02 (51.3)	—	—	—	—	—	—	—
BH□□-ML16-13	BH□□-ML16-13-3	16 mm FITOK	16 mm FITOK																			
BH□□-ML18-13	BH□□-ML18-13-3	18 mm FITOK	18 mm FITOK											—	—	13.6	—	2.70 (68.6)	1.34 (34)	—	—	—
BH□□-TS12-13	—	3/4" TS	3/4" TS																			
BH□□-PS8-13	—	1/2 PS	1/2 PS																			
BH□□-PB8-13	—	1/2×SCH80 Pipe Butt Weld	1/2×SCH80 Pipe Butt Weld	—	—	6.8	—	2.69 (68.3)	1.34 (34)	—	—	—										
BH□□-PB12-13	—	3/4×SCH80 Pipe Butt Weld	3/4×SCH80 Pipe Butt Weld																			
BH□□-FNS12-22	BH□□-FNS12-22-3	3/4 Female NPT	3/4 Female NPT	0.88 (22.2)	0.71 (18.0)	31.0	12.0	3.59 (91.2)	1.8 (45.7)	1.25 (31.8)	2.94 (74.7)	6.00 (152)	5.45 (138)									
BH□□-FRT12-22	BH□□-FRT12-22-3	3/4 Female BSPT	3/4 Female BSPT																			

B-20 Ball Valves

Basic Ordering Number		Connection Type and Size		Orifice in.(mm)		Cv		Dimensions, in. (mm)														
2-way	3-way	Connection 1	Connection 2/3	2-way	3-way	2-way	3-way	A	B	C	D	E	H									
BH□□-FRP12-22	BH□□-FRP12-22-3	3/4 Female BSPP	3/4 Female BSPP	0.71 (18.0)	0.88 (22.2)	31.0	12.0	3.59 (91.2)	1.8 (45.7)	1.25 (31.8)	2.94 (74.7)	6.00 (152)	5.45 (138)									
BH□□-FNS16-22	BH□□-FNS16-22-3	1 Female NPT	1 Female NPT					4.45 (113)	2.23 (56.6)													
BH□□-FRT16-22	BH□□-FRT16-22-3	1 Female BSPT	1 Female BSPT					5.36 (136)	2.68 (68)													
BH□□-FRP16-22	BH□□-FRP16-22-3	1 Female BSPP	1 Female BSPP					6.34 (161)	3.17 (80.5)													
BH□□-FL16-22	BH□□-FL16-22-3	1" FITOK	1" FITOK					5.36 (136)	2.68 (68)													
BH□□-FL20-22	BH□□-FL20-22-3	1 1/4" FITOK	1 1/4" FITOK					6.14 (156)	3.07 (78)													
BH□□-ML25-22	BH□□-ML25-22-3	25 mm FITOK	25 mm FITOK					3.59 (91.2)	1.80 (45.7)													
BH□□-ML28-22	BH□□-ML28-22-3	28 mm FITOK	28 mm FITOK					38.0	3.59 (91.2)					1.80 (45.7)								
BH□□-TS16-22	—	1" TS	1" TS					36.0	3.59 (91.2)					1.80 (45.7)								
BH□□-MTS25-22	—	25 mm Tube Socket Weld	25 mm Tube Socket Weld					42.0	3.59 (91.2)					1.80 (45.7)								
BH□□-PS12-22	—	3/4 PS	3/4 PS	1.13 (28.6)	0.87 (22.0)	36.0	18.0	3.46 (87.9)	1.73 (43.9)	1.25 (31.8)	1.53 (38.9)	4.03 (102)	9.14 (232)									
BH□□-PS16-22	—	1 PS	1 PS					4.39 (112)	2.19 (55.6)													
BH□□-PB16-22	—	1xSCH80 Pipe Butt Weld	1xSCH80 Pipe Butt Weld					4.57 (116)	2.28 (57.9)													
BH□□-TS20-29	—	1 1/4" TS	1 1/4" TS					80.0	4.51 (115)	2.25 (57.2)												
BH□□-PB20-32	—	1 1/4xSCH80 Pipe Butt Weld	1 1/4xSCH80 Pipe Butt Weld					90.0	4.57 (116)	2.28 (57.9)												
BH□□-FNS20-32	BH□□-FNS20-32-3	1 1/4 Female NPT	1 1/4 Female NPT					1.25 (31.8)	0.98 (25.0)	100.0				23.0	4.39 (112)	2.19 (55.6)	1.74 (44.2)	4.16 (106)	9.14 (232)	7.21 (183)		
BH□□-FNS24-32	BH□□-FNS24-32-3	1 1/2 Female NPT	1 1/2 Female NPT												100.0	4.94 (125)					2.47 (62.5)	
BH□□-TS24-32	—	1 1/2" TS	1 1/2" TS												90.0	6.14 (156)					3.12 (78)	
BH□□-PS20-32	—	1 1/4 PS	1 1/4 PS												130.0	—					—	
BH□□-PS24-32	—	1 1/2 PS	1 1/2 PS												—	—					—	
BH□□-PB24-32	—	1 1/2xSCH80 Pipe Butt Weld	1 1/2xSCH80 Pipe Butt Weld	—	—	—																
BH□□-FNS32-38	BH□□-FNS32-38-3	2 Female NPT	2 Female NPT	1.50 (38.1)	0.98 (25.0)	130.0	23.0				4.94 (125)	2.47 (62.5)	1.74 (44.2)		4.16 (106)	9.14 (232)					7.21 (183)	
BH□□-FRT32-38	BH□□-FRT32-38-3	2 Female BSPT	2 Female BSPT								—	—										—
BH□□-TS32-38	—	2" TS	2" TS								—	—										—
BH□□-PS32-38	—	2 PS	2 PS								—	—										—
BH□□-PB32-38	—	2xSCH80 Pipe Butt Weld	2xSCH80 Pipe Butt Weld					—	—	—												

1. FITOK means FITOK double ferrule tube fittings, TS means fractional tube socket weld, MTS means metric tube socket weld, TB means fractional tube butt weld, MTB means metric tube butt weld, PS means pipe socket weld, and PB means pipe butt weld.
2. Sizes and types listed are standard. Other sizes and types are available upon request, please contact FITOK Group or our authorized distributors.
3. Dimensions are shown with tube fitting nuts finger-tightened. All dimensions are for reference only and are subject to change. For dimensions not shown above, please contact FITOK Group or our authorized distributors.

Ball Valves for Special Applications

Fire safe applications

- API 607 and ISO 15848-1 certified.
- Patented stem packing design and seat design.
- Working temperature: -40°F to 400°F (-40°C to 204°C).
- Working pressure up to: 1500 psig (103 bar).
- Orifice size: 0.19" (4.8 mm) to 1.25" (31.8 mm).
- Helium leak rate/stem diameter $\leq 1.78 \times 10^{-6}$ std cm^3/s .
- To order a fire safe valve, add **-IE** to the valve ordering number.
- For example: BHSS-FL16-22-IE
- To order a FDA-compliant fire safe valve, add **-FDA-IE** to the valve ordering number.
- For example: BHSS-FL16-22-FDA-IE



Structure Features

Live-loaded disc spring

Elastic compensation effect

Graphite stem packing

Maintain good sealing performance under fire conditions

PTFE stem packing

Maintain good sealing performance under normal conditions

Metal seal design

Reduce the risk of leakage under fire conditions by reducing the active gap between the spherical surface and the sealing surface

PTFE flange seal

Maintain good sealing performance under normal conditions

PTFE seat

Maintain good sealing performance under normal conditions

Graphite flange seal

Maintain good sealing performance under fire conditions

Anti-static device

Grounding spring to provide anti-static protection


Special bolt construction

Maintain body seal during rapid temperature changes resulting from fire exposure and water quenching

Vented ball

Allow pressure to equalize between the valve body and the upstream port, preventing overpressurization and potential seal blowout under fire conditions

Pressure vs. Temperature

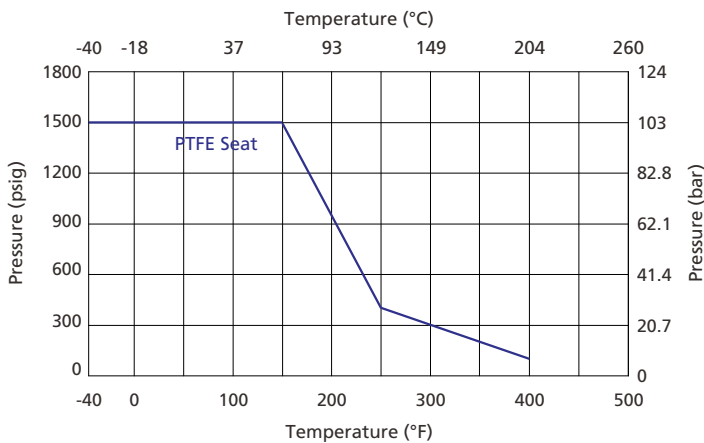

Standard Materials of Construction

Component	Material/ ASME Specification
<i>Disc Spring</i>	<i>Alloy X-750/AMS 5542</i>
Flange Seal	Graphite
Stem Packing	Graphite
<i>Packing Support</i>	<i>316 SS/A479</i>
<i>Stem Lower Bearing</i>	<i>316 SS/A479</i>
<i>Stem Upper Bearing</i>	<i>PEEK</i>
Body Bolt	SS

Notes: Wetted components are listed in italics. Other components not listed are in the same material as components of general service ball valves. For other materials, please contact FITOK Group or our authorized distributors.

B-22 Ball Valves

Low-Temperature Service

Working Temperature Range: -65°F to 250°F (-54°C to 121°C).

Working Pressure: Up to 3000 psig (207 bar).

Orifice Sizes: 0.19" (4.8 mm) to 0.88" (22.2 mm).

Valves for low-temperature service are equipped with low-temperature EPDM O-rings.

All other materials are the same as those of standard valves.


To order a valve for low-temperature service, add **-LT** to the valve ordering number.

For example: BHSS-FL4-P05-LT

BHSS-FL4-P05-3-LT

Seal kits for field replacement are available (see "Seal Kits" section).

Pressure VS Temperature

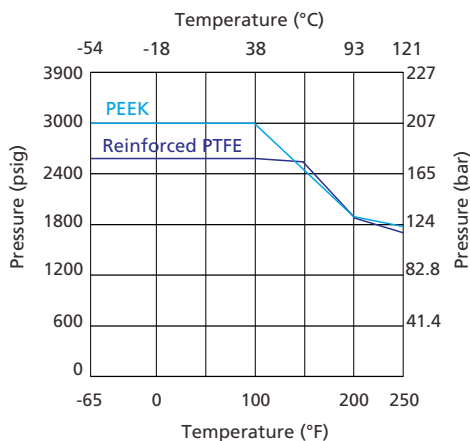

Materials of Construction

Component	Material/Specification
<i>Seat</i>	<i>PEEK/Reinforced PTFE</i>
<i>Flange Seal</i>	<i>Low Temperature EPDM</i>
<i>Upper/Lower Packing</i>	<i>Reinforced PTFE</i>

Note: Wetted components are listed in italics. Other components are same as standard materials of construction.

Seal Kits


Valve Orifice	Flow Pattern	Special Application	Basic Seal Kit Ordering Number	Content
05/07	2-way and 3-way	None	BHSS-□4-RK	Seat, disc spring, stem bearing, lower packing, upper packing, stem spring, packing support, flange seal, instructions
		Low-temperature service	BHSS-□4-LT-RK	
10/13		None	BHSS-□8-RK	
		Low-temperature service	BHSS-□8-LT-RK	
22		None	BHSS-□16-RK	
		Low-temperature service	BHSS-□16-LT-RK	
29/32		None	BHSS-□24-RK	
		Low-temperature service	—	
38	None	BHSS-□32-RK		
	Low-temperature service	—		

Seat Material	Designator
PTFE	-
Reinforced PTFE	R
PEEK	P

1. Seal kit components are the same materials and grades listed in materials of construction.
2. The default seat material in the seal kit for BH series valves is PTFE. To order seats with other materials, add a seat material designator to "□" in the basic seal kit ordering number to get a complete ordering number.
Example: BHSS-8-RK
 BHSS-P8-LT-RK
3. The listed basic seal kit ordering numbers specify 316 material. To order kits with other materials, such as Alloy C-276, replace "SS" with "HC" in the ordering number.
Example: BHHC-8-RK

Locking Device

- ⦿ Lock BH series 2-way or 3-way valves, locking hole diameters of the whole series of valves are 0.20 in (5.0 mm).
- ⦿ To order a ball valve with locking device, add -L to the valve ordering number.
Example: BHSS-FL16-22-L/BHSS-FL16-22-3L



Ball Valve without Handle

- ⦿ Ball Valve without handle can be directly connected to the FITOK actuator assembly.
- ⦿ To order, please add -AM to the valve ordering number.
Example: BHSS-FL4-P05-AM

Ordering Number Description

BHS4 - FNS8 - FRT8 - FL8 - P13G - OHQ3L - SCEF2

Series	Body Material	Connection 1 Type	Connection 1 Size	Connection 2/3 Type	Connection 2/3 Size	Seat Material	Orifice Size	Packing Material	Handle/Actuator	For Actuator	Flow Pattern	Locking Device	Special Application	Cleaning and Packaging
BH	SS S4	CF8M CF8	FNS Female NPT	2	1/8"	Same as Connection 1	05 0.19" (4.8 mm)	Reinforced PTFE	Yellow Handle Sleeve		None		No	FC-01
			NS Male NPT	4	1/4" or 1/4xSCH80	Specified in the same way as Connection 1 type and size	07 0.28" (7.1 mm)	R Reinforced PTFE P PEEK	I Red Handle Sleeve	H	Mechanical Limit Switch	L Yes	S NACE MR0175	F2 FC-02
			FRT Female BSPT	5	5/16"		10 0.41" (10.4 mm)		GR Green Handle Sleeve	N	Inductive Limit Switch		SI Inert Silicon Coated	
			RT Male BSPT	6	3/8" or 6 mm or 3/8xSCH80		13 0.52" (13.1 mm)		J Blue Handle Sleeve	Q	Solenoid Valve		CE CE Certification	
			FRP Female BSPP (for RP)	8	1/2" or 8 mm or 1/2xSCH80		22 0.88" (22.2 mm)		EL Oval Handle with Orange Sleeve	HQ	Mechanical Limit Switch and Solenoid Valve		LT Low-Temperature Service	
			BP Male BSPP (for RG)	10	10 mm		29 1.13" (28.6 mm)		AM Without Handle	NQ	Inductive Limit Switch and Solenoid Valve			
			FMS Female Metric Thread (for RG)	12	3/4" or 12 mm or 3/4xSCH80		32 1.25" (31.8 mm)		C 90° Normally Closed Pneumatic Actuator					
			MS Male Metric Thread (for RG)	14	14 mm or M14x1.5		38 1.50" (38.1 mm)		O 90° Normally Open Pneumatic Actuator				Straight	
			MTS Metric Tube Socket	16	1" or 16 mm or 1xSCH80				D 90° Double Acting Pneumatic Actuator				3 3-way	
			TS Fractional Tube Socket	18	18 mm				LX 180° Left End Normally Open Pneumatic Actuator					
			MTB Metric Tube Butt Weld	20	1 1/4" or 20 mm or M20x1.5 or 1 1/4xSCH80				RX 180° Right End Normally Open Pneumatic Actuator					
			TB Fractional Tube Butt Weld	22	22 mm or M22x1.5				DX 180° Double Acting Pneumatic Actuator					
			PS Pipe Socket Weld	24	1 1/2" or M24x1.5 or 1-1/2xSCH80				E 90° Electric Actuator					
			PB Pipe Butt Weld	25	25 mm				EX 180° Electric Actuator					
			FL Fractional Tube Fitting	27	M27x2									
			ML Metric Tube Fitting	28	28 mm									
			UFB Rotatable Fractional Tube Butt Weld	32	2" or 2xSCH80									
			UMB Rotatable Metric Tube Butt Weld											
			UPB Nut + Gasket + Pipe Bulged Nipple											
			FO Male FO Fitting											
			FR Male FR Fitting											

- Standard thread pitch for metric threads are as follows:
M10 and below: 1 mm
M12 to M24: 1.5 mm
M27 and above: 2 mm
Standard thread pitch should be omitted in the ordering number, others should be specified.
- If you need a port with orbital welding, please contact FITOK Group.
- FO means FITOK O-ring face seal fittings.
FR means FITOK metal gasket face seal fittings.
- For oxygen-enriched environment or hazardous media service, contact FITOK Group or our authorized distributors.
- Cleaning and Packaging:
FC-01: Standard cleaning and packaging for general industrial procedures.
FC-02: Special cleaning and packaging for wetted system components to ensure compliance with product cleanliness requirements of ASTM G93 Level C.
- For more information about pneumatic actuator ball valves, please refer to the catalog **Actuated Ball Valves**.
- Inert Silicon Coated: Except for ball valves with PEEK seat, wetted metal components Inert Silicon Coated.
- CE certification is available. For more information, please contact FITOK group or our authorized distributors

Note: "Ordering Number Description" is a reference to understand the combination rules of FITOK product part number. Not all combinations are available.

One-Piece Instrumentation Ball Valves

BO Series

Features



- ⦿ Working pressures up to 3,000 psig (207 bar)
- ⦿ Working temperature: -65°F to 300°F (-54°C to 148°C)
- ⦿ Cv up to 12
- ⦿ No dead space for enhanced cleanliness
- ⦿ One-piece body and one-piece ball stem for improved sealing performance
- ⦿ Top-loaded design allows adjustment with the valve in-line
- ⦿ Live-loaded design improves thermal cycling performance and compensates for packing wear
- ⦿ Available in 2-way, 3-way, 4-way, 5-way, 6-way or 7-way flow patterns
- ⦿ Angle-pattern flow path available
- ⦿ Each valve is factory leak-tested with nitrogen or compressed air at rated pressure



Notes:

1. To prevent seat leakage, packing adjustment may be required periodically during the service life of the valve.
2. A higher initial actuation torque may happen to the valves that have not been actuated for a period of time.
3. Before installation, instrumentation ball valves exposed to dynamic temperature conditions may lose their initial packing load. Stem packing adjustment should be required.

Standard Materials of Construction

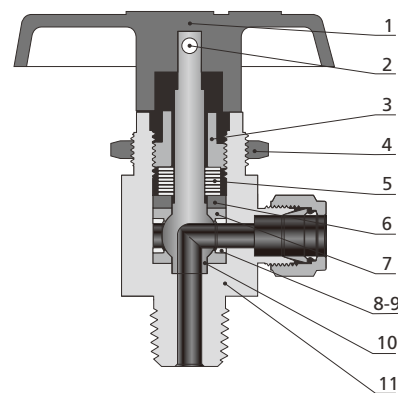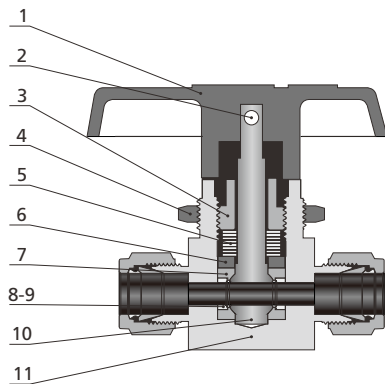

Item	Component	Valve Body Material		
		316 SS	Brass	Alloy 400
		Material Grade/ASTM Specification		
1	Handle	Nylon or Aluminium		
2	Set Screw	Zinc-plated carbon steel		
3	Packing Bolt	316 SS/A479	Brass C36000/B16	316 SS/A479
4	Panel Nut	316 SS/A479	Brass C36000/B16	316 SS/A479
5	Disc Spring	S17700/A693		
6	Gland	316 SS/A479	316 SS/A479	316 SS/A479
7	<i>Packing Seat</i>	<i>PTFE/D1710 or UHMWPE/D4020 or PFA/D3307</i>		
8	<i>Support Ring</i>	316 SS/A479	316 SS/A479	Alloy 400/B164
9	<i>Support Disc</i>			
10	<i>Ball Stem</i>	316 SS/A479	Brass C36000/B16	Alloy 400/B164
11	<i>Body</i>	316 SS/A182	Brass C37700/B283	Alloy 400/B164
<i>Wetted Lubricant</i>		<i>Fluorinated-based and silicone-based</i>		
Non-wetted Lubricant		Molybdenum disulfide with hydrocarbon binder coat		

Note: Wetted components are listed in italics.
For other materials, please contact FITOK Group or our authorized distributors.

On-Off (2-way) Valves

Standard Flow Path

Straight Pattern




Angle Pattern



Pressure vs. Temperature

Straight Pattern and Angle Pattern


PTFE Packing Seat

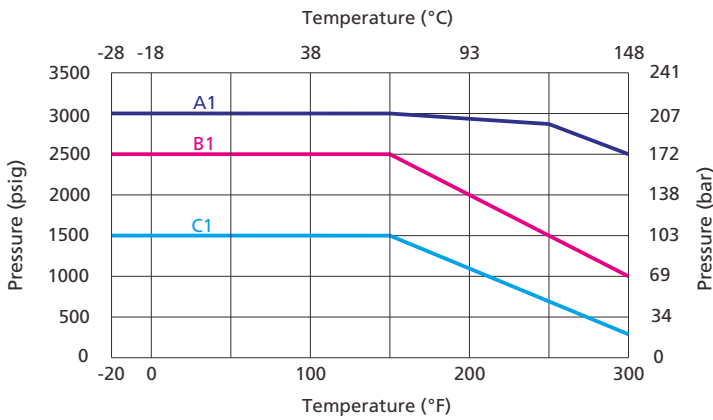

- A1: Straight Pattern Valves (orifice 0.19")
- B1: Straight Pattern Valves (orifice 0.05" & 0.06" & 0.09" & 0.13" & 0.28" & 0.41")
Angle Pattern Valves (orifice 0.05" & 0.06" & 0.09" & 0.13" & 0.19")
- C1: Angle Pattern Valves (orifice 0.28" & 0.41")

PFA, UHMWPE Packing Seat


The working temperature of UHMWPE packing seat should not be higher than 150°F (65°C).

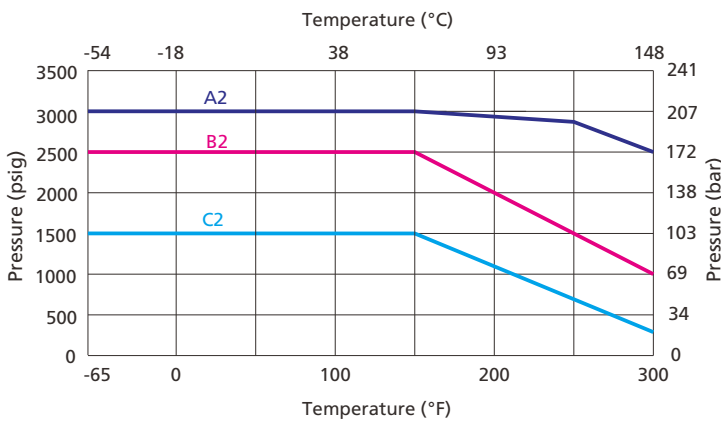


- A2: Straight Pattern Valves (orifice 0.19")
- B2: Straight Pattern Valves (orifice 0.05" & 0.06" & 0.09" & 0.13" & 0.28" & 0.41")
Angle Pattern Valves (orifice 0.05" & 0.06" & 0.09" & 0.13" & 0.19")
- C2: Angle Valves (orifice 0.28" & 0.41")

Dimensions

Straight Pattern

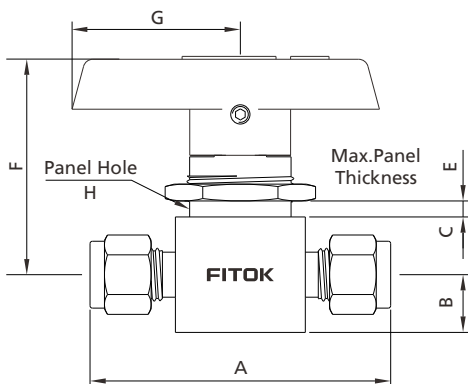

Angle Pattern

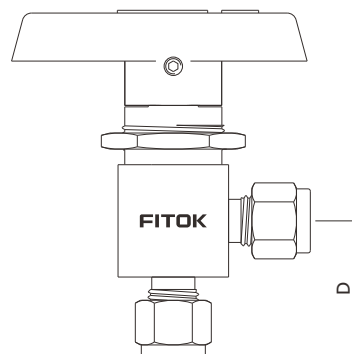

B-28 Ball Valves

Ball Valves
Plug Valves

Basic Ordering Number	Connection Type and Size	Orifice in. (mm)	Cv		Dimensions, in. (mm)								
			Straight	Angle	A	B	C	D	E	F	G	H	
BO□□-FL1-00	1/16" FITOK	0.05 (1.3)	0.10	—	1.68 (42.7)				—				
BO□□-FL2-02	1/8" FITOK	0.09 (2.4)	0.20	0.15	2.01 (51.1)	0.28 (7.1)	0.34 (8.6)	0.97 (24.6)	0.25 (6.4)	1.43 (36.2)	1.10 (28)	19/32 (15.1)	
BO□□-FL4-03	1/4" FITOK	0.13 (3.2)	0.60	0.35	2.21 (56.1)			1.07 (27.2)					
BO□□-FL4-05		0.19 (4.8)	1.40	0.90	2.39 (60.7)	0.38 (9.7)	0.44 (11.2)	1.17 (29.7)	0.19 (4.8)	1.64 (41.7)	1.57 (39.9)	25/32 (19.8)	
BO□□-FL6-05	3/8" FITOK		1.50		2.58 (65.5)			1.29 (32.8)					
BO□□-FL6-07		0.28 (7.1)	6.00	2.00	3.05 (77.5)	0.56 (14.2)	0.56 (14.2)	1.43 (36.3)	0.35 (9)	2.19 (55.5)	2.05 (52)	1 1/8 (28.6)	
BO□□-FL8-10	1/2" FITOK	0.41 (10.3)	12.00	4.60									
BO□□-FL12-10	3/4" FITOK		6.40	3.80	3.92 (99.6)	0.69 (17.5)	0.69 (17.5)	1.74 (44.2)	0.49 (12.5)	2.67 (67.7)	3.13 (79.6)	1 1/2 (38.1)	
BO□□-ML3-02	3 mm FITOK	0.09 (2.4)	0.20	0.15	2.01 (51.1)	0.28 (7.1)	0.34 (8.6)	0.97 (24.6)	0.25 (6.4)	1.43 (36.2)	1.10 (28)	19/32 (15.1)	
BO□□-ML6-03	6 mm FITOK	0.13 (3.2)	0.60	0.35	2.21 (56.1)			1.07 (27.2)					
BO□□-ML6-05		0.19 (4.8)	1.40	0.90	2.39 (60.7)	0.38 (9.7)	0.44 (11.2)	1.17 (29.7)	0.19 (4.8)	1.64 (41.7)	1.57 (39.9)	25/32 (19.8)	
BO□□-ML8-05	8 mm FITOK		1.50		2.46 (62.5)			1.20 (30.5)					
BO□□-ML10-07	10 mm FITOK	0.28 (7.1)	6.00	2.00	3.07 (78.0)	0.56 (14.2)	0.56 (14.2)	1.43 (36.3)	0.35 (9)	2.19 (55.5)	2.05 (52)	1 1/8 (28.6)	
BO□□-ML12-10	12 mm FITOK	0.41 (10.3)	12.00	4.60	3.92 (99.6)	0.69 (17.5)	0.69 (17.5)	1.74 (44.2)	0.49 (12.5)	2.67 (67.7)	3.13 (79.6)	1 1/2 (38.1)	
BO□□-FNS2-03	1/8 Female NPT	0.13 (3.2)	0.50	0.30	1.63 (41.4)	0.28 (7.1)	0.34 (8.6)	0.81 (20.6)	0.25 (6.4)	1.43 (36.2)	1.10 (28)	19/32 (15.1)	
BO□□-FNS2-05		0.19 (4.8)	1.20	0.70	2.00 (50.8)	0.38 (9.7)	0.44 (11.2)	1.00 (25.4)	0.19 (4.8)	1.64 (41.7)	1.57 (39.9)	25/32 (19.8)	
BO□□-FNS4-05	1/4 Female NPT		0.90	0.75	2.06 (52.3)			1.03 (26.2)					
BO□□-FNS4-07		0.28 (7.1)	3.00	1.70	2.50 (63.5)	0.56 (14.2)	0.56 (14.2)	1.25 (31.8)	0.35 (9)	2.19 (55.5)	2.05 (52)	1 1/8 (28.6)	
BO□□-FNS6-07	3/8 Female NPT		2.60	1.50									
BO□□-FNS8-10	1/2 Female NPT	0.41 (10.3)	6.30	3.50	3.12 (79.2)	0.69 (17.5)	0.69 (17.5)	1.56 (39.6)	0.49 (12.5)	2.67 (67.7)	3.13 (79.6)	1 1/2 (38.1)	
BO□□-NS4-05	1/4 Male NPT	0.19 (4.8)	1.20	0.75	2.00 (50.8)	0.38 (9.7)	0.44 (11.2)	1.03 (26.2)	0.19 (4.8)	1.64 (41.7)	1.57 (39.9)	25/32 (19.8)	
BO□□-FRT4-05	1/4 Female BSPT		0.90			2.06 (52.3)							
BO□□-FRT6-07	3/8 Female BSPT	0.28 (7.1)	2.60	—	2.50 (63.5)	0.56 (14.2)	0.56 (14.2)	—	0.35 (9)	2.19 (55.5)	2.05 (52)	1 1/8 (28.6)	
BO□□-FRT8-10	1/2 Female BSPT	0.41 (10.3)	6.30	—	3.12 (79.2)	0.69 (17.5)	0.69 (17.5)	—	0.49 (12.5)	2.67 (67.7)	3.13 (79.6)	1 1/2 (38.1)	
BO□□-FO4-03	1/4 Male FO	0.13 (3.2)	0.60	0.35	1.75 (44.4)		0.34 (8.6)	0.94 (23.9)	0.25 (6.4)	1.43 (36.2)	1.10 (28)	19/32 (15.1)	
BO□□-FO4-05		0.19 (4.8)	2.40	0.90	1.88 (47.8)	0.38 (9.7)	0.44 (11.2)		0.19 (4.8)	1.64 (41.7)	1.57 (39.9)	25/32 (19.8)	
BO□□-FR4-03	1/4 Male FR	0.13 (3.2)	0.60	0.35	2.13 (54.1)		0.34 (8.6)	1.09 (27.7)	0.25 (6.4)	1.43 (36.2)	1.10 (28)	19/32 (15.1)	
BO□□-FR4-05		0.19 (4.8)	2.40	0.90			0.44 (11.2)		0.19 (4.8)	1.64 (41.7)	1.57 (39.9)	25/32 (19.8)	
BO□□-FR8-07	1/2 Male FR	0.28 (7.1)	6.00	—	2.88 (73.2)	0.56 (14.2)	—	—	0.35 (9)	2.19 (55.5)	2.05 (52)	1 1/8 (28.6)	
BO□□-FR8-10		0.41 (10.3)	12.00	—	3.12 (79.2)	0.69 (17.5)	—	—	0.49 (12.5)	2.67 (67.7)	3.13 (79.6)	1 1/2 (38.1)	

Switching (3-, 4-, 5-, 6- and 7-Way) Valves

Standard Flow Path

3-way Valves



3L Flow Path

This type of valve can connect one side port to the bottom port or shut off 3 ports. Switch between 0°, 90° and 180° positions with 180° rotation handle.



Ports 1 and 3 open Off Ports 1 and 2 open

4-way Valves




4L Flow Path

This type of valve can connect one side port to the bottom port, and shut off other 2 side ports at the same time. Switching can be done in 120° increments with 360° rotation handle.



Ports 1 and 2 open Ports 1 and 3 open Ports 1 and 4 open

5-way Valves



5L Flow Path

This type of valve can connect one side port to the bottom port, and shut off other 3 side ports at the same time. Switching can be done in 90° increments with 360° rotation handle.



Ports 1 and 2 open Ports 1 and 3 open Ports 1 and 4 open Ports 1 and 5 open

6-way Valves




6L Flow Path

This type of valve can connect one side port to the bottom port, and shut off other 4 side ports at the same time. Switching can be done in 72° increments with 360° rotation handle.



Ports 1 and 2 open Ports 1 and 3 open Ports 1 and 4 open Ports 1 and 5 open Ports 1 and 6 open

7-way Valves

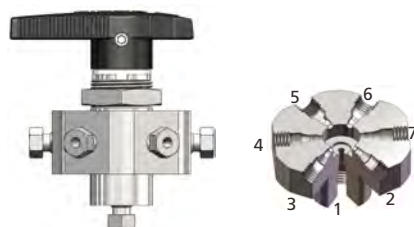

7L Flow Path

This type of valve can connect one side port to the bottom port, and shut off other 5 side ports at the same time. Switching can be done in 60° increments with 360° rotation handle.




Ports 1 and 2 open Ports 1 and 3 open Ports 1 and 4 open Ports 1 and 5 open Ports 1 and 6 open Ports 1 and 7 open

Pressure vs. Temperature

Switching Valves

PTFE Packing Seat

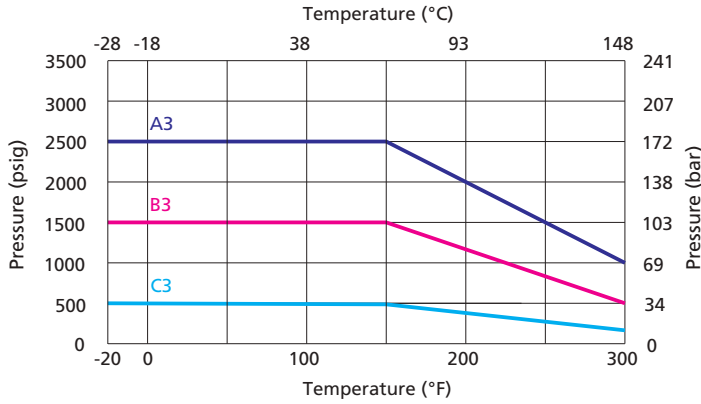


A3: 3-way (orifice 0.05" & 0.06" & 0.09" & 0.13" & 0.19")
4-way / 5-way (orifice 0.06")

B3: 3-way (orifice 0.28" & 0.41")
4-way / 5-way (orifice 0.41")

C3: 6-way / 7-way (orifice 0.05" & 0.06")

PFA, UHMWPE Packing Seat

The working temperature of UHMWPE packing seat should not be higher than 150°F (65°C).

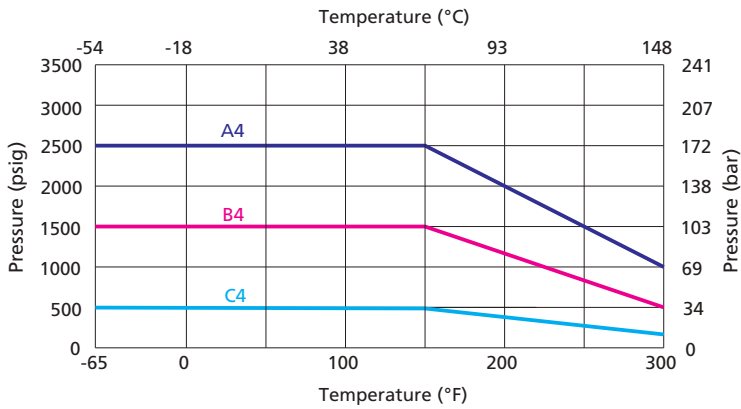


A4: 3-way (orifice 0.05" & 0.06" & 0.09" & 0.13" & 0.19")
4-way / 5-way (orifice 0.06")

B4: 3-way (orifice 0.28" & 0.41")
4-way / 5-way (orifice 0.41")


C4: 6-way / 7-way (orifice 0.05" & 0.06")

Dimensions


3-way Valves

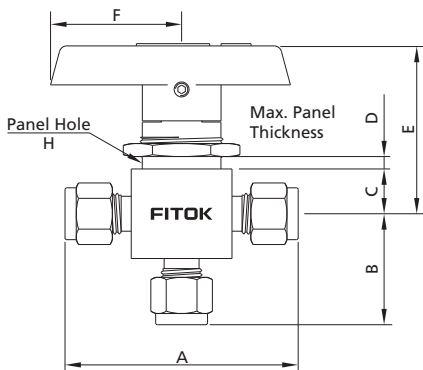

4-and 5-way Valves

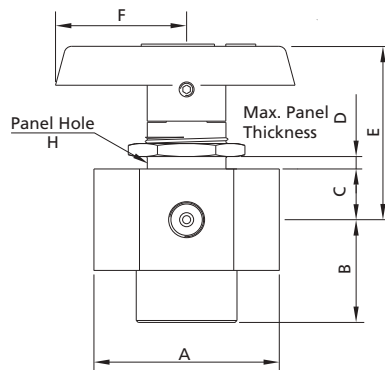

6-and 7-way Valves

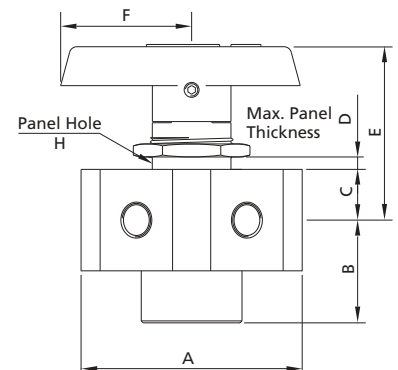


Basic Ordering Number	Connection Type and Size	Orifice in. (mm)	Cv	Dimensions, in. (mm)						
				A	B	C	D	E	F	H
3-way Valves										
BO□□-FL1-00-3L	1/16" FITOK	0.05 (1.3)	0.08	1.68 (42.7)	0.81 (20.6)					
BO□□-FL2-02-3L	1/8" FITOK	0.09 (2.4)	0.15	2.01 (51.1)	0.97 (24.6)	0.34 (8.6)	0.25 (6.4)	1.43 (36.2)	1.10 (28)	19/32 (15.1)
BO□□-FL4-03-3L	1/4" FITOK	0.13 (3.2)	0.35	2.21 (56.1)	1.07 (27.2)					
BO□□-FL4-05-3L		0.19 (4.8)	0.90	2.39 (60.7)	1.17 (29.7)	0.44 (11.2)	0.19 (4.8)	1.64 (41.7)	1.57 (39.9)	25/32 (19.8)
BO□□-FL6-07-3L	3/8" FITOK	0.28 (7.1)	2.00	2.89 (73.4)	1.43 (36.3)	0.56 (14.2)	0.35 (9)	2.19 (55.5)	2.05 (52)	11/8 (28.6)
BO□□-FL8-10-3L	1/2" FITOK	0.41 (10.3)	4.60	3.48 (88.4)	1.74 (44.2)	0.69 (17.5)	0.49 (12.5)	2.67 (67.7)	3.13 (79.6)	11/2 (38.1)
BO□□-FL12-10-3L	3/4" FITOK		4.90							
BO□□-ML3-02-3L	3 mm FITOK	0.09 (2.4)	0.15	2.01 (51.1)	0.97 (24.6)	0.34 (8.6)	0.25 (6.4)	1.43 (36.2)	1.10 (28)	19/32 (15.1)
BO□□-ML6-03-3L	6 mm FITOK	0.13 (3.2)	0.35	2.21 (56.1)	1.07 (27.2)					
BO□□-ML6-05-3L		8 mm FITOK	0.19 (4.8)	0.90	2.39 (60.7)	1.17 (29.7)	0.44 (11.2)	0.19 (4.8)	1.64 (41.7)	1.57 (39.9)
BO□□-ML8-05-3L	0.80			2.46 (62.5)	1.20 (30.5)					
BO□□-ML10-07-3L	10 mm FITOK	0.28 (7.1)	2.00	2.89 (73.4)	1.43 (36.3)	0.56 (14.2)	0.35 (9)	2.19 (55.5)	2.05 (52)	1 1/8 (28.6)
BO□□-ML12-10-3L	12 mm FITOK	0.41 (10.3)	4.60	3.48 (88.4)	1.74 (44.2)	0.69 (17.5)	0.49 (12.5)	2.67 (67.7)	3.13 (79.6)	1 1/2 (38.1)
BO□□-FNS2-03-3L	1/8 Female NPT	0.13 (3.2)	0.30	1.63 (41.4)	0.81 (20.6)	0.34 (8.6)	0.25 (6.4)	1.43 (36.2)	1.10 (28)	19/32 (15.1)
BO□□-FNS4-05-3L	1/4 Female NPT	0.19 (4.8)	0.75	2.06 (52.3)	1.03 (26.2)	0.44 (11.2)	0.19 (4.8)	1.64 (41.7)	1.57 (39.9)	25/32 (19.8)
BO□□-FNS4-07-3L		0.28 (7.1)	1.70	2.5 (63.5)	1.18 (30)	0.56 (14.2)	0.35 (9)	2.19 (55.5)	2.05 (52)	1 1/8 (28.6)
BO□□-FNS6-07-3L	3/8 Female NPT		1.50							
BO□□-FNS8-10-3L	1/2 Female NPT	0.41 (10.3)	3.50	3.13 (79.5)	1.56 (39.6)	0.69 (17.5)	0.49 (12.5)	2.67 (67.7)	3.13 (79.6)	1 1/2 (38.1)
BO□□-FRT4-05-3L	1/4 Female BSPT	0.19 (4.8)	0.75	2.06 (52.3)	1.03 (26.2)	0.44 (11.2)	0.19 (4.8)	1.64 (41.7)	1.57 (39.9)	25/32 (19.8)
BO□□-FRT6-07-3L	3/8 Female BSPT	0.28 (7.1)	1.50	2.5 (63.5)	1.18 (30)	0.56 (14.2)	0.35 (9)	2.19 (55.5)	2.05 (52)	1 1/8 (28.6)
BO□□-FRT8-10-3L	1/2 Female BSPT	0.41 (10.3)	3.50	3.13 (79.5)	1.56 (39.6)	0.69 (17.5)	0.49 (12.5)	2.67 (67.7)	3.13 (79.6)	1 1/2 (38.1)
4 - & 5-way Valves										
BO□□-FL2-01-4L	1/8" Female FITOK Tube Fitting	0.06 (1.6)	0.07	2.36 (60)	1.32 (33.5)	0.44 (11.2)	0.20 (5.2)	1.76 (44.6)	1.57 (39.9)	29/32 (23.1)
BO□□-FL2-01-5L				1.85 (47)	0.88 (22.4)					
BO□□-FNS2-01-4L	1/8 Female NPT	0.06 (1.6)	0.07	1.55 (39.4)						
BO□□-FNS2-01-5L										
BO□□-FNS8-10-4L	1/2 Female NPT	0.41 (10.3)	3.50	3.13 (79.5)	1.56 (39.6)	0.69 (17.5)	0.41 (10.5)	2.67 (70.2)	2.63 (66.7)	1 1/2 (38.1)
BO□□-FNS8-10-5L										
6 - & 7-way Valves										
BO□□-FL1-00-6L	1/16" Female FITOK Tube Fitting	0.05 (1.3)	0.05	2.64 (67)	1.32 (33.5)	0.44 (11.2)	0.28 (7)	1.76 (44.6)	1.57 (39.9)	29/32 (23.1)
BO□□-FL1-00-7L										
BO□□-FL2-01-6L	1/8" Female FITOK Tube Fitting	0.06 (1.6)	0.07	2.26 (57.6)	0.97 (24.7)					
BO□□-FL2-01-7L										


Crossover (4-, 6-Way) Valves

Standard Flow Path

4-way Valves

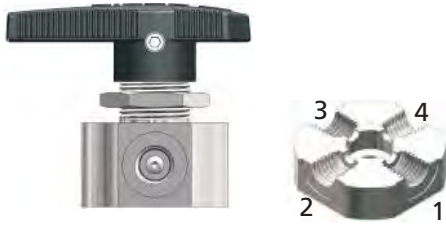


6-way Valves

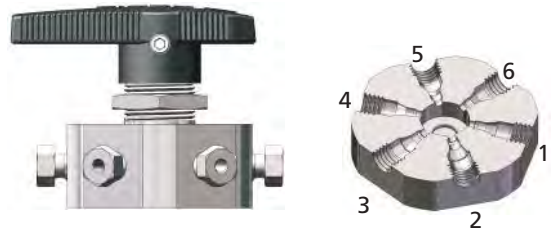

4C Flow Path

This type of valve can connect two groups of adjacent ports at the same time. Switch between 0° and 90° positions with 90° rotation handle.

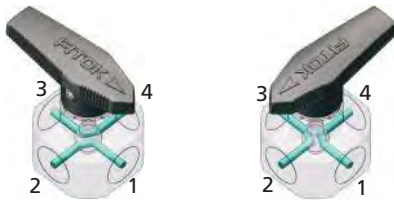


Ports 1 and 2 open
Ports 3 and 4 open

Ports 1 and 4 open
Ports 2 and 3 open

6C Flow Path

This type of valve can connect three groups of adjacent ports at the same time. Switch between 0° and 60° positions with 60° rotation handle.

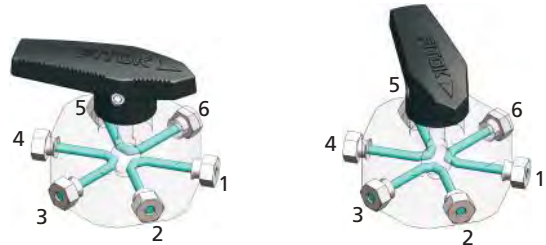


Ports 1 and 2 open
Ports 3 and 4 open
Ports 5 and 6 open

Ports 1 and 6 open
Ports 2 and 3 open
Ports 4 and 5 open

Pressure vs. Temperature

Crossover Valves

PTFE Packing Seat

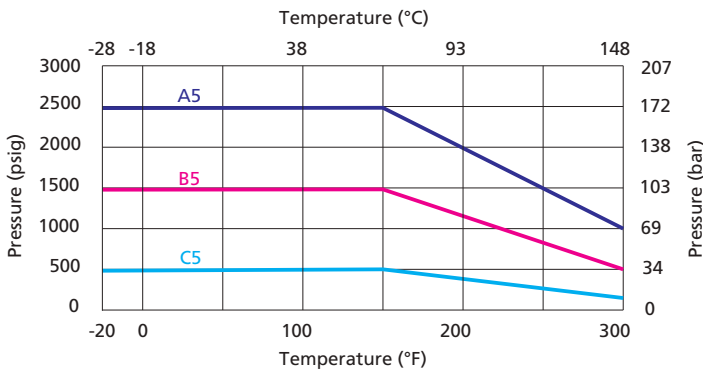


A5: 4-way (orifice 0.06")

B5: 4-way (orifice 0.28")

C5: 6-way (orifice 0.05" & 0.06")

PFA, UHMWPE Packing Seat


The working temperature of UHMWPE packing seat should not be higher than 150°F (65°C).

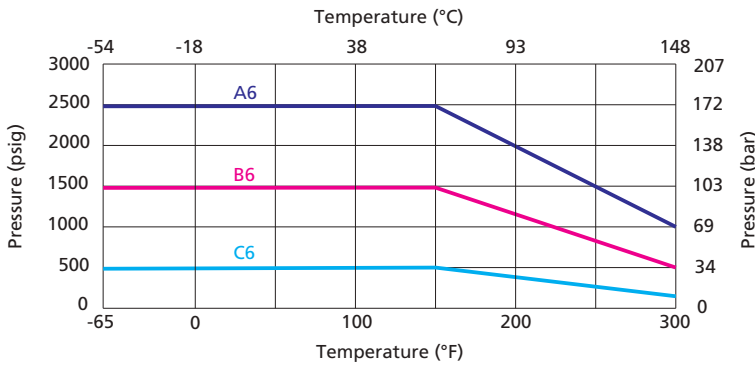


- A6: 4-way (orifice 0.06")
- B6: 6-way (orifice 0.41")
- C6: 6-way (orifice 0.05" & 0.06")

Dimensions

4-way Valves

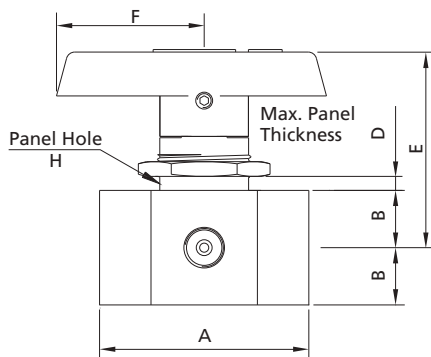

6-way Valves

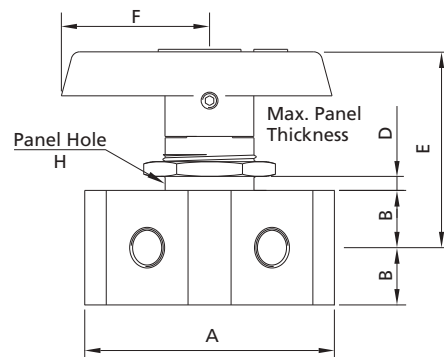

Basic Ordering Number	Connection Type and Size	Orifice in. (mm)	Cv	Dimensions, in. (mm)					
				A	B	D	E	F	H
4-way Valve									
BO□□-FL1-00-4C	1/16" Female FITOK Tube Fitting ^①	0.05 (1.3)	0.06	1.95 (49.6)					
BO□□-FL2-01-4C	1/8" Female FITOK Tube Fitting ^①	0.06 (1.6)	0.08	2.61 (66.3)	0.44 (11.2)	0.19 (4.8)	1.64 (41.7)	1.57 (39.9)	25/32 (19.8)
BO□□-FNS2-01-4C	1/8" Female NPT ^②			1.55 (39.4)					
BO□□-FNS8-07-4C	1/2" Female NPT ^②	0.28 (7.1)	1.60	3.13 (79.5)	0.69 (17.5)	0.48 (12.2)	2.67 (67.7)	3.13 (79.6)	1 1/2 (38.1)
6-way Valve									
BO□□-FL1-00-6C	1/16" Female FITOK Tube Fitting	0.05 (1.3)	0.06	1.95 (49.5)	0.44 (11.2)	0.19 (4.8)	1.68 (42.7)	1.53 (38.9)	29/32 (23.1)
BO□□-FL2-01-6C	1/8" Female FITOK Tube Fitting	0.06 (1.6)	0.08	2.59 (65.8)					

Notes: Connection type for ball valves in 4L, 5L, 6L, 7L, 4C, 6C, 4H, 4HL, 4V, 5HL, 5H and 5LV flow path is female FITOK tube fitting, which can not be used directly with standard FT and MT connections. Please contact FITOK Group or authorized distributors for use with standard FT and MT connections.

① There might be an across-connection flow during switching. If it is not acceptable to you, please specify a spherical orifice of 0.049 in. Example: BOSS-FL2-01-4C-049.

② There might be an across-connection flow during switching. If it is not acceptable to you, please specify a spherical orifice of 0.093 in. Example: BOSS-FNS8-07-4C-093.

1. FITOK means FITOK double ferrule tube fittings.
2. Sizes and types listed are standard. Other sizes and types are available upon request, please contact FITOK Group or our authorized distributors.
3. Dimensions are shown with tube fitting nuts finger-tightened. All dimensions are for reference only and are subject to change. For dimensions not shown above, please contact FITOK Group or our authorized distributors.


Special Flow Path

3-way Valves



3HL Flow Path

This type of valve can connect one side port to the bottom port, or connect two side ports to the bottom port. Switching can be done in 90° increments with 180° rotation handle.

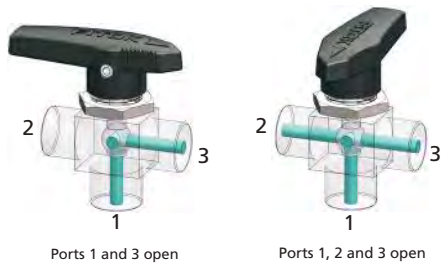

Note: For Temperature VS. Pressure curves and dimensions of 3-way valves, see Switching (3-way) Valves above. For Temperature VS. Pressure curves and dimensions of 4-way valves, see Crossover (4-way) Valves above.

4-way Valves




4H Flow Path

This type of valve can connect two opposite ports. Switch between 0° and 90° positions with 90° rotation handle.



4HL Flow Path

This type of valve can connect three adjacent ports and shut off other ports. Switching can be done in 90° increments with 360° rotation handle.

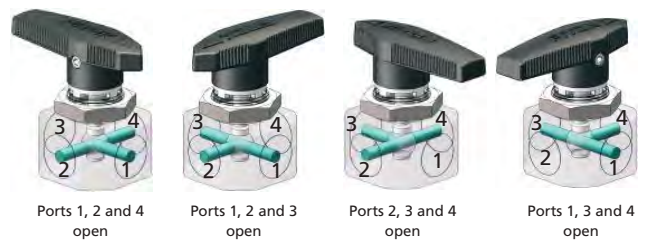

4V Flow Path

This type of valve can connect two adjacent ports and shut off other ports. Switching can be done in 90° increments with 360° rotation handle.



5-way Valves



5HL Flow Path

This type of valve can connect three side ports to the bottom port, and shut off the fourth side port at the same time. Switching can be done in 90° increments with 360° rotation handle.


5H Flow Path

This type of valve can connect the bottom port to port 2 and port 4, or connect the bottom port to port 3 and port 5. Switch between 0° and 90° positions with 90° rotation handle.



5LV Flow Path

This type of valve can connect two adjacent ports to the bottom port, and shut off other two side ports at the same time. Switching can be done in 90° increments with 360° rotation handle.

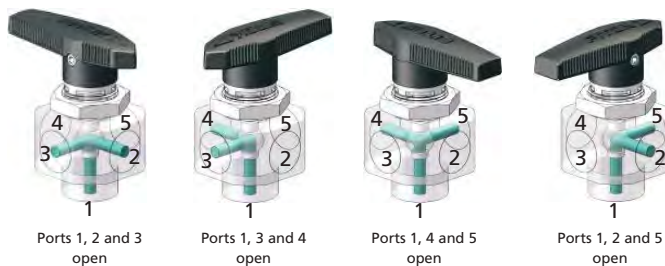

Note: For Temperature vs. Pressure curve and dimensions of 5-way valves, see Switching (5-way) Valves above.

Vent Port Options

Vented Valves

The maximum working pressure for vented valves is 500 psig (34.5 bar).

Straight-pattern Valves

A vent hole in the side of the valve body makes the downstream port vent to atmosphere when the valve is closed.

Angle-pattern and 3-way Valves

A vent hole in the side of the valve body makes the bottom port vent to atmosphere when the valve is closed.

Welded Vent Port Connections

A FITOK tube fitting or a tube stub welded to the vent port is available for stainless steel vented valves.

Process Option

Valves with FOG process are available. FOG refers to FC-02 without lubrication.

To order a valve with FOG process, add -FOG suffix to the valve ordering number, for example: BOSS-FL4-05-FOG.

The pressure rating of valves with FOG process: 200 psig (13.8 bar) for orifice 10, 500 psig (34.5 bar) for other orifice.


The starting torque of valves with FOG process is greater than that of the lubricated valves.

Bottom Screw Panel Mounting Options


Mounting Dimensions

The bottom screw panel mounting options are not available on angle-pattern valves, 3-way valves, 6-way valves and 7-way valves.


2-way

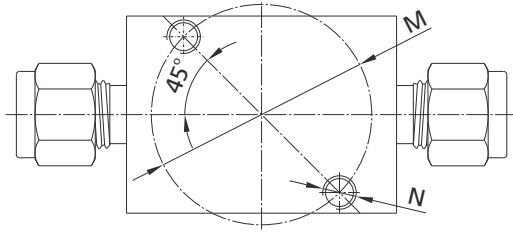

4-way



5-way

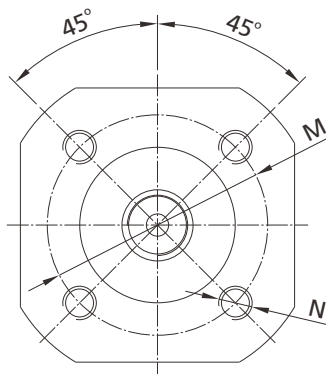

	Orifice in. (mm)	Dimensions, in. (mm)	
		M	N
2-way	0.05~0.13 (1.3~3.2)	0.63 (15.88)	M2.5 x 0.45 deep 0.24" (6)
	0.19 (4.8)	0.88 (22.23)	M3 x 0.5 deep 0.24" (6)
	0.28 (7.1)	1.25 (31.75)	M5 x 0.8 deep 0.24" (6)
4-way	0.05~0.06 (1.3~1.6)	1.25 (31.75)	M5 x 0.8 deep 0.24" (6)
	0.28 (7.1)	2.00 (50.8)	M5 x 0.8 deep 0.24" (6)
5-way	0.05~0.06 (1.3~1.6)	1.25 (31.75)	M5 x 0.8 deep 0.24" (6)
	0.41 (10.3)	2.00 (50.8)	M5 x 0.8 deep 0.24" (6)

Locking Device

- ⦿ Locking Device 1 can lock BO series valves with 90° or 180° rotation handle, locking hole diameter is 0.21 in (5.2 mm);
- ⦿ To order a ball valve with locking device 1, add -LH to the valve ordering number.
Example: BOSS-FL6-07-LH/BOSS-FL6-07-3L-LH
- ⦿ Locking Device 2 can lock BO series valves with 90°, 180°, or 360° rotation handle, locking hole diameter is 0.34 in (8.7 mm);
- ⦿ To order a ball valve with locking device 2, add -LK to the valve ordering number.
Example: BOSS-ML6-05-LK/BOSS-ML6-05-5L-LK

Caution: These handles are designed to prevent unintentional valve operation. They are not tamper resistant and can be removed, even when locked.




Diagram of Locking Device 1




Diagram of Locking Device 2


Ball Valve without Handle

- ⦿ Ball Valve without handle can be directly connected to the FITOK actuator assembly.
- ⦿ To order, please add -AM to the valve ordering number.

Example: BOSS-FL4-05-AM

Ordering Number Description

BOSS - ML6 - FL4 - ML8 - H05 - DXHQ3L - BLH - FL4 - SF2

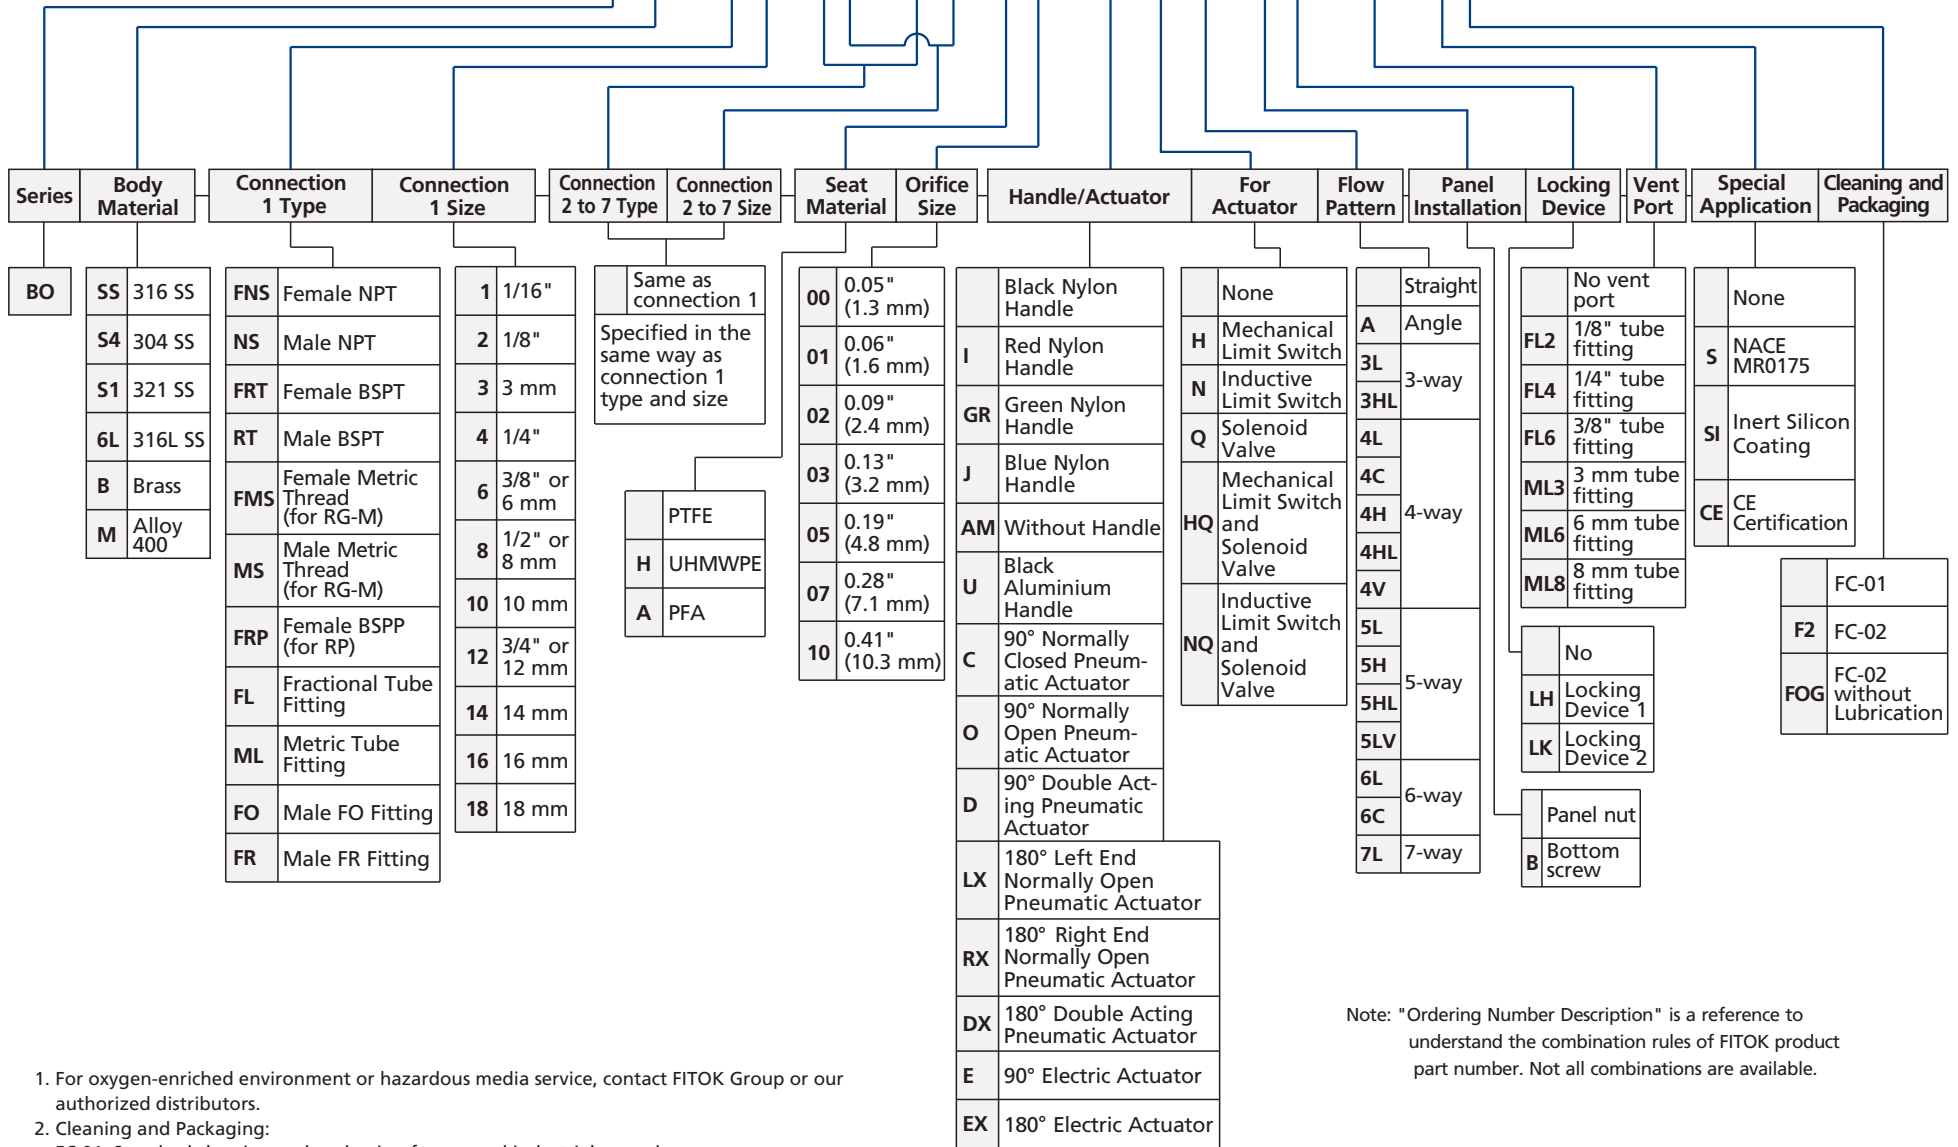

Note: "Ordering Number Description" is a reference to understand the combination rules of FITOK product part number. Not all combinations are available.

- For oxygen-enriched environment or hazardous media service, contact FITOK Group or our authorized distributors.
- Cleaning and Packaging:
 - FC-01: Standard cleaning and packaging for general industrial procedures.
 - FC-02: Special cleaning and packaging for wetted system components to ensure compliance with product cleanliness requirement of ASTM G93 Level C.
- For more information about pneumatic actuator ball valves, please refer to the catalog Actuated Ball Valves.
- Inert Silicon Coating: Wetted metal components Inert Silicon coated.
- CE certification is available. For more information, please contact FITOK group or our authorized distributors.

Bar Stock Ball Valves

BP Series

Features

- ⦿ Working pressures up to 10,000 psig (690 bar)
- ⦿ Working temperature: -40°F to 450°F (-40°C to 232°C)
- ⦿ Cv up to 30
- ⦿ Floating ball design compensates for seat wear, improving leak-tight integrity
- ⦿ Blowout-proof stem minimizes failures caused by stem movement or looseness
- ⦿ Available in 2-way or 3-way flow patterns
- ⦿ Each valve is factory leak-tested with nitrogen or compressed air at rated pressure




Ball Valves
Plug Valves


Pressure vs. Temperature

2-way Valves

Orifice code: 10

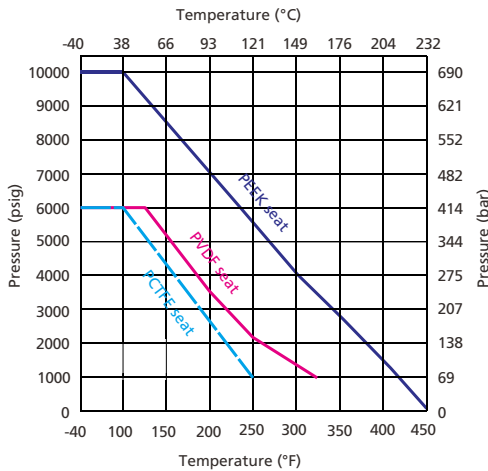


Orifice code: 13 and 19

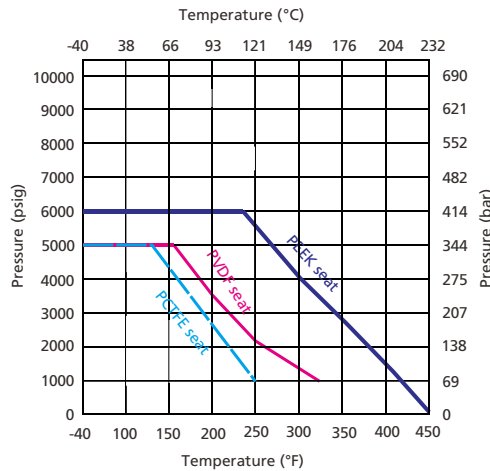


3-way Valves

Orifice code: 10

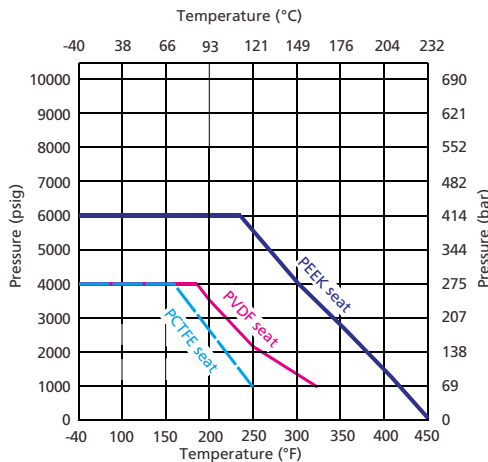

Orifice code: 13 and 19

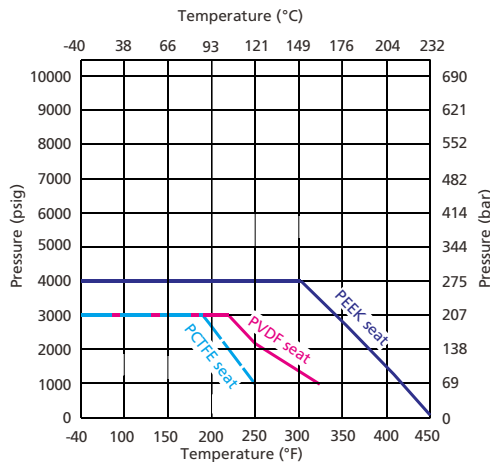

Notes: 1. Graphs are with 316 SS body. For information of body in other materials, please contact FITOK Group or our authorized distributors.
2. The working pressure of valves is restricted by materials of the valve body and seat, as well as end connections. When choosing a valve for your applications, please refer to the above Temperature vs. Pressure Curves and the pressure rating in the dimension table. The minimum value shall be the pressure rating of the valve.


Pressure Rating@100°F (38°C)

Material	End Connection	Pressure Rating, psig (bar)
316 SS	FNS4, FNS6, FNS8, NS4, NS6, NS8, FL4, ML6	10000 (690)
	ML10	8400 (578)
	FL6, ML8	7500 (516)
	ML12	6800 (470)
	FL8	6700 (462)
	ML14	6200 (427)
	FL10, FNS12, FNS16, NS12, NS16	6000 (414)
	ML16, FL12	5800 (400)
	ML20	5500 (379)
	ML18	5400 (372)
	ML22	4900 (338)
	FL16	4700 (324)
	ML25	4600 (317)


Note: Maximum working pressure of BP Series ball valves is 10,000 psig. The specified pressure rating is restricted by end connections.

Standard Materials of Construction

2-way Valves

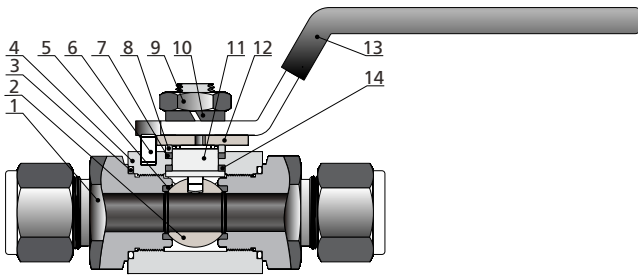

3-way Valves

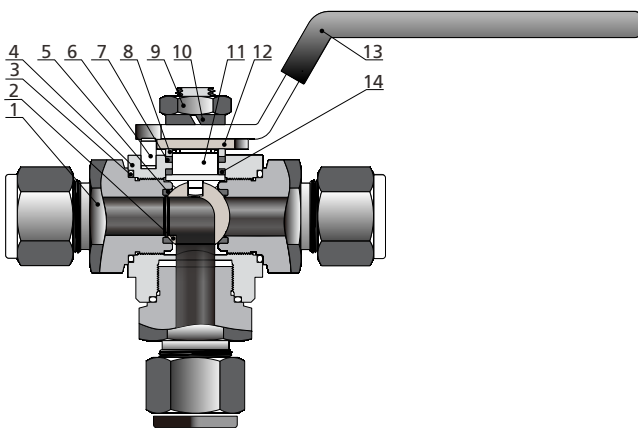

Item	Component	Body Material
		316 SS
1	<i>End Connection</i>	<i>316 SS/A479</i>
2	<i>Ball</i>	<i>316 SS/A479</i>
3	<i>O-ring^①</i>	<i>Fluorocarbon FKM</i>
4	<i>Body</i>	<i>316 SS/A479</i>
5	<i>Seat</i>	<i>PVDF or PCTFE or PEEK</i>
6	Stop Pin	SS
7	<i>Stem Packing</i>	<i>PTFE/D1710</i>
8	<i>Stem Washer</i>	<i>316 SS/A479</i>
9	<i>Stem Nut^②</i>	SS
10	<i>Spring Washer</i>	SS
11	<i>Stem</i>	<i>316 SS/A479</i>
12	Stop Block	304 SS/A240
13	Handle	SS with vinyl cover
14	<i>Lower Packing^③</i>	PEEK

Note: Wetted components are listed in italics.

For other materials, please contact FITOK Group or our authorized distributors.


① Ball valves with orifice designator 10 and PEEK seats include a PEEK flange seal.

② Ball valves with orifice code 13 or 19 have 2 stem nuts.

③ Lower packing material of ball valves with orifice code 19 is PTFE.

Dimensions

2-way Valves

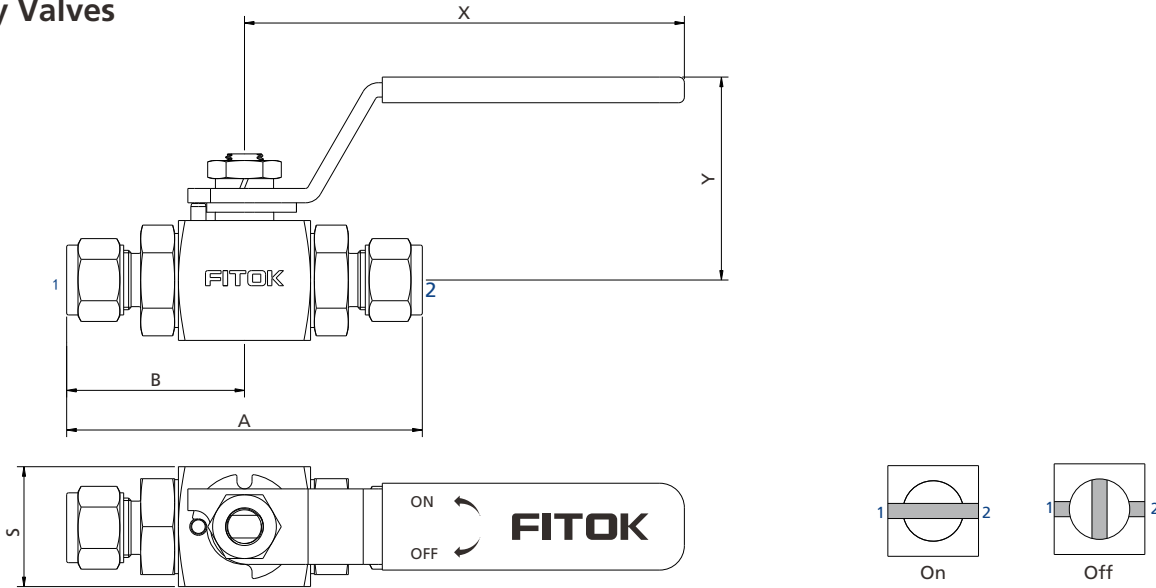


Ball Valves
Plug Valves


Basic Ordering Number	Connection Type and Size	Orifice in. (mm)	Cv	Dimensions, in. (mm)									
				A	B	X	Y	S					
BP□□-ML6-10	6 mm FITOK	0.19(4.8)	1.2	3.54 (90.0)	1.77 (45.0)	4.57 (116.0)	2.12 (53.9)	1.30 (32.0)					
BP□□-ML8-10	8 mm FITOK	0.25(6.4)	2.3	3.60 (91.6)	1.80 (45.8)								
BP□□-ML10-10	10 mm FITOK	0.31(7.9)	3.8	3.70 (94.0)	1.85 (47.0)								
BP□□-ML12-10	12 mm FITOK	0.39 (10.0)	7.5	3.94 (100.0)	1.97 (50.0)								
BP□□-ML14-10	14 mm FITOK			3.92 (99.6)	1.96 (49.8)								
BP□□-FL4-10	1/4" FITOK	0.19(4.8)	1.2	3.56 (90.4)	1.78 (45.2)								
BP□□-FL6-10	3/8" FITOK	0.28(7.1)	3.7	3.72 (94.6)	1.86 (47.3)								
BP□□-FL8-10	1/2" FITOK	0.39 (10.0)	7.5	3.03 (77.0)	1.52 (38.5)								
BP□□-FNS4-10	1/4 Female NPT			2.80 (71.0)	1.40 (35.5)								
BP□□-FNS6-10	3/8 Female NPT			3.27 (83.0)	1.63 (41.5)								
BP□□-FNS8-10	1/2 Female NPT			3.36 (85.4)	1.68 (42.7)								
BP□□-NS4-10	1/4 Male NPT	0.28(7.1)	3.7	3.75 (95.2)	1.88 (47.6)								
BP□□-NS6-10	3/8 Male NPT	0.39 (10.0)	7.5										
BP□□-NS8-10	1/2 Male NPT												
BP□□-ML16-13	16 mm FITOK	0.50 (12.7)	10.0	4.42 (112.2)	2.21 (56.1)	5.59 (142.0)	2.54 (64.4)	1.50 (38.0)					
BP□□-ML18-13	18 mm FITOK			4.12 (104.6)	2.06 (52.3)								
BP□□-ML20-13	20 mm FITOK			4.43 (112.6)	2.22 (56.3)								
BP□□-ML22-13	22 mm FITOK			4.29 (109.0)	2.15 (54.5)								
BP□□-FL10-13	5/8" FITOK			4.36 (110.6)	2.18 (55.3)								
BP□□-FL12-13	3/4" FITOK			3.54 (90.0)	1.77 (45.0)								
BP□□-FNS8-13	1/2 Female NPT			4.09 (104.0)	2.05 (52.0)								
BP□□-FNS12-13	3/4 Female NPT			4.14 (105.2)	2.07 (52.6)								
BP□□-NS12-13	3/4 Male NPT			0.71 (18.0)	30.0				4.87 (123.8)	2.43 (61.9)	6.46 (164.0)	2.72 (69.0)	1.96 (50.0)
BP□□-ML20-19	20 mm FITOK								5.11 (129.8)	2.66 (64.9)			
BP□□-ML22-19	22 mm FITOK	4.59 (116.6)	2.29 (58.3)										
BP□□-ML25-19	25 mm FITOK	5.11 (129.8)	2.66 (64.9)										
BP□□-FL12-19	3/4" FITOK	3.81 (96.8)	1.91 (48.4)										
BP□□-FL16-19	1" FITOK	4.26 (108.2)	2.13 (54.1)										
BP□□-FNS12-19	3/4 Female NPT	4.91 (124.8)	2.45 (62.4)										
BP□□-FNS16-19	1 Female NPT												
BP□□-NS16-19	1 Male NPT												

3-way Valves

Vertical Pattern

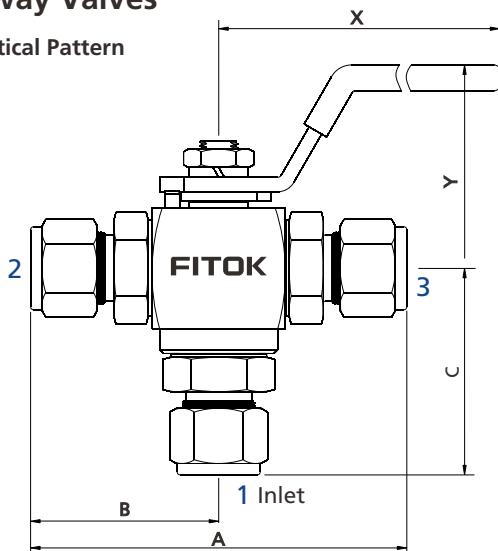

Port 1 as inlet
180° rotation handle




Port 1 to port 2




Port 1 to port 3


Horizontal Pattern

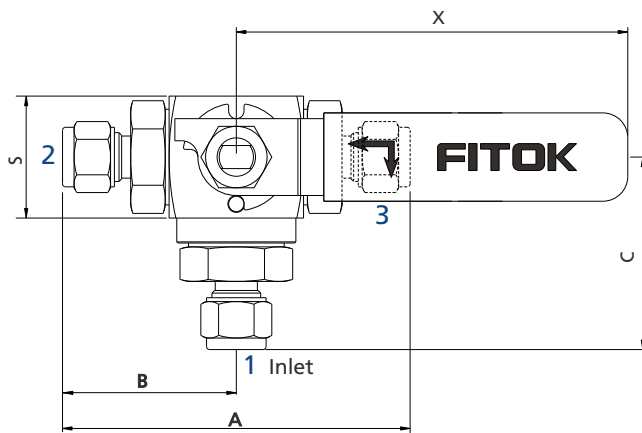

Port 1 as inlet
90° rotation handle



Port 1 to port 2



Port 1 to port 3

Note: Restricted flow path for BP series: only port 1 as inlet, port 2 and port 3 as outlet

Basic Ordering Number	Connection Type and Size	Orifice in. (mm)	Dimensions, in. (mm)					
	Connection 1/2/3		A	B	C	X	Y	S
BP□□-ML6-10-3□	6 mm FITOK	0.19 (4.8)	3.54 (90.0)	1.77 (45.0)	2.00 (51.0)	4.57 (116.0)	2.12 (53.9)	1.30 (32.0)
BP□□-ML8-10-3□	8 mm FITOK	0.25 (6.4)	3.60 (91.6)	1.80 (45.8)	2.02 (51.3)			
BP□□-ML10-10-3□	10 mm FITOK	0.31 (7.9)	3.70 (94.0)	1.85 (47.0)	2.07 (52.5)			
BP□□-ML12-10-3□	12 mm FITOK	0.39 (10.0)	3.94 (100.0)	1.97 (50.0)	2.18 (55.5)			
BP□□-ML14-10-3□	14 mm FITOK							
BP□□-FL4-10-3□	1/4" FITOK	0.19 (4.8)	3.56 (90.4)	1.78 (45.2)	1.95 (49.5)			
BP□□-FL6-10-3□	3/8" FITOK	0.28 (7.1)	3.72 (94.6)	1.86 (47.3)	2.16 (54.8)			
BP□□-FL8-10-3□	1/2" FITOK	0.39 (10.0)	3.92 (99.6)	1.96 (49.8)	2.13 (54.0)			
BP□□-FNS4-10-3□	1/4 Female NPT		3.03 (77.0)	1.52 (38.5)	1.44 (36.5)			
BP□□-FNS6-10-3□	3/8 Female NPT		2.80 (71.0)	1.40 (35.5)	1.57 (40.0)			
BP□□-FNS8-10-3□	1/2 Female NPT		3.27 (83.0)	1.63 (41.5)	1.83 (46.4)			
BP□□-NS4-10-3□	1/4 Male NPT	0.28 (7.1)	3.36 (85.4)	1.68 (42.7)	1.90 (48.2)			
BP□□-NS6-10-3□	3/8 Male NPT	0.39 (10.0)						
BP□□-NS8-10-3□	1/2 Male NPT		3.75 (95.2)	1.88 (47.6)	2.09 (53.1)			



Basic Ordering Number	Connection Type and Size	Orifice in. (mm)	Dimensions, in. (mm)					
			A	B	C	X	Y	S
BP□□-ML16-13-3□	16 mm FITOK	0.50 (12.7)	4.42 (112.2)	2.21 (56.1)	2.60 (66.1)	5.59 (142.0)	2.54 (64.4)	1.50 (38.0)
BP□□-ML18-13-3□	18 mm FITOK		4.12 (104.6)	2.06 (52.3)	2.45 (62.3)			
BP□□-ML20-13-3□	20 mm FITOK		4.43 (112.6)	2.22 (56.3)	2.61 (66.3)			
BP□□-ML22-13-3□	22 mm FITOK		4.29 (109.0)	2.15 (54.5)	2.54 (64.5)			
BP□□-FL10-13-3□	5/8" FITOK		4.36 (110.6)	2.18 (55.3)	2.57 (65.3)			
BP□□-FL12-13-3□	3/4" FITOK		3.54 (90.0)	1.77 (45.0)	2.02 (51.2)			
BP□□-FNS8-13-3□	1/2 Female NPT		4.09 (104.0)	2.05 (52.0)	2.44 (62.0)			
BP□□-FNS12-13-3□	3/4 Female NPT		4.14 (105.2)	2.07 (52.6)	2.46 (62.6)			
BP□□-NS12-13-3□	3/4 Male NPT		0.71 (18.0)	4.87 (123.8)	2.43 (61.9)			
BP□□-ML20-19-3□	20 mm FITOK	5.11 (129.8)		2.66 (64.9)	3.00 (76.2)			
BP□□-ML22-19-3□	22 mm FITOK	4.86 (123.4)		2.43 (61.7)	3.02 (76.7)			
BP□□-ML25-19-3□	25 mm FITOK	5.11 (129.8)		2.66 (64.9)	2.85 (72.4)			
BP□□-FL12-19-3□	3/4" FITOK	3.82 (97.0)		1.91 (48.5)	2.22 (56.5)			
BP□□-FL16-19-3□	1" FITOK	4.26 (108.2)		2.13 (54.1)	2.72 (69.1)			
BP□□-FNS12-19-3□	3/4 Female NPT	4.54 (115.2)		2.27 (57.6)	2.72 (69.1)			
BP□□-FNS16-19-3□	1 Female NPT	4.91 (124.8)		2.45 (62.4)	2.90 (73.9)			
BP□□-NS12-19-3□	3/4 Male NPT							
BP□□-NS16-19-3□	1 Male NPT							

1. FITOK means FITOK double ferrule tube fittings.
2. Sizes and types listed are standard. Other sizes and types are available upon request, please contact FITOK Group or our authorized distributors.
3. Dimensions are shown with tube fitting nuts finger-tightened. All dimensions are for reference only and are subject to change.
For dimensions not shown above, please contact FITOK Group or our authorized distributors.

Panel Mounting Options

Dimension for Panel Mounting

Orifice in. (mm)	in. (mm)			
	L1	L2	T1	T2
0.39 (10.0)	1.02 (26.0)	1.02 (26.0)	M4×0.7P deep 0.19 (5.0)	1.18 (30.0)
0.50 (12.7)	1.18 (30.0)	1.18 (30.0)	M5×0.8P deep 0.19 (5.0)	1.18 (30.0)
0.71 (18.0)	1.37 (35.0)	1.57 (40.0)	M5×0.8P deep 0.19 (5.0)	1.50 (38.0)

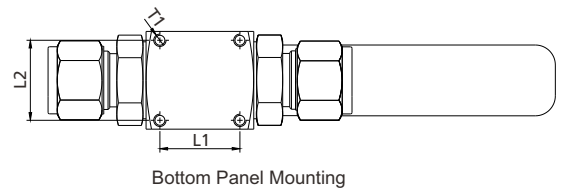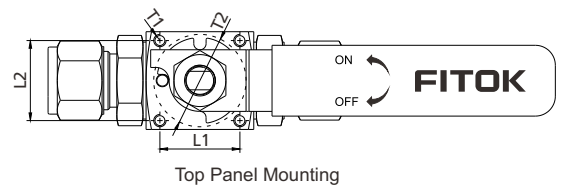

Seal Kits

Valve Orifice	Flow Pattern	Basic Seal Kit Ordering Number	Content
10	2-way	BPSS-□10-RK	Seat, upper packing, lower packing, O-ring, stem, ball, instructions
	3-way (vertical)	BPSS-□10-3-RK	
	3-way (horizontal)	BPSS-□10-3S-RK	
13	2-way	BPSS-□13-RK	
	3-way (vertical)	BPSS-□13-3-RK	
	3-way (horizontal)	BPSS-□13-3S-RK	
19	2-way	BPSS-□19-RK	
	3-way (vertical)	BPSS-□19-3-RK	
	3-way (horizontal)	BPSS-□19-3S-RK	

Seat Material	Designator
PVDF	-
PCTFE	K
PEEK	P

1. Seal kit components are the same materials and grades listed in materials of construction.
2. The default seat material in the seal kit for BP series valves is PVDF. To order seats with other materials, add a seat material designator to "□" in the basic seal kit ordering number to get a complete ordering number.
Example: BPSS-10-RK
BPSS-P10-RK
3. The listed basic seal kit ordering numbers specify 316 stainless steel material. To order kits with other materials, such as 304 stainless steel material, replace "SS" with "S4" in the ordering number.
Example: BPS4-10-RK

Locking Device

- ⦿ Locking Device 1 can lock BP series 2-way or 3-way valves , locking hole diameter is 0.23 in (6.0 mm);
- ⦿ To order a ball valve with locking device 1, add **-L** to the valve ordering number.

Example: BPSS-FL4-10-L/BPSS-FL4-10-3S-L/BPSS-FL4-10-3-L

- ⦿ Locking Device 2 can lock BP series 2-way or 3-way valves, locking hole diameters of valves with orifice 10 or 13 are 0.23 in (6.0 mm);
- ⦿ To order a ball valve with locking device 2, add **-LK** to the valve ordering number.

Example: BPSS-FL4-10-LK/BPSS-FL4-10-3S-LK

- ⦿ When both top mounting holes and locking devices are present, only locking device 2 should be selected. When both bottom mounting holes and locking devices are present, either locking device may be selected.

Example: BPSS-FL4-10-MLK/BPSS-FL4-10-MDL/BPSS-FL4-10-MDLK

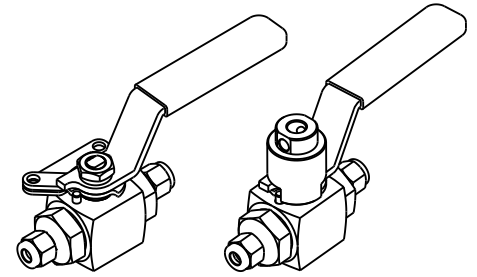


Diagram of Locking Device 1

Diagram of Locking Device 2

Ball Valve without Handle


Ball Valve without handle can be directly connected to the FITOK actuator assembly.

To order, please add **-AM** to the valve ordering number.

Example: BPSS-FL12-13-AM

Ordering Number Description

BPSS - ML20 - FL12 - FNS8 - P13 - OHQ3MLK - SCEF2

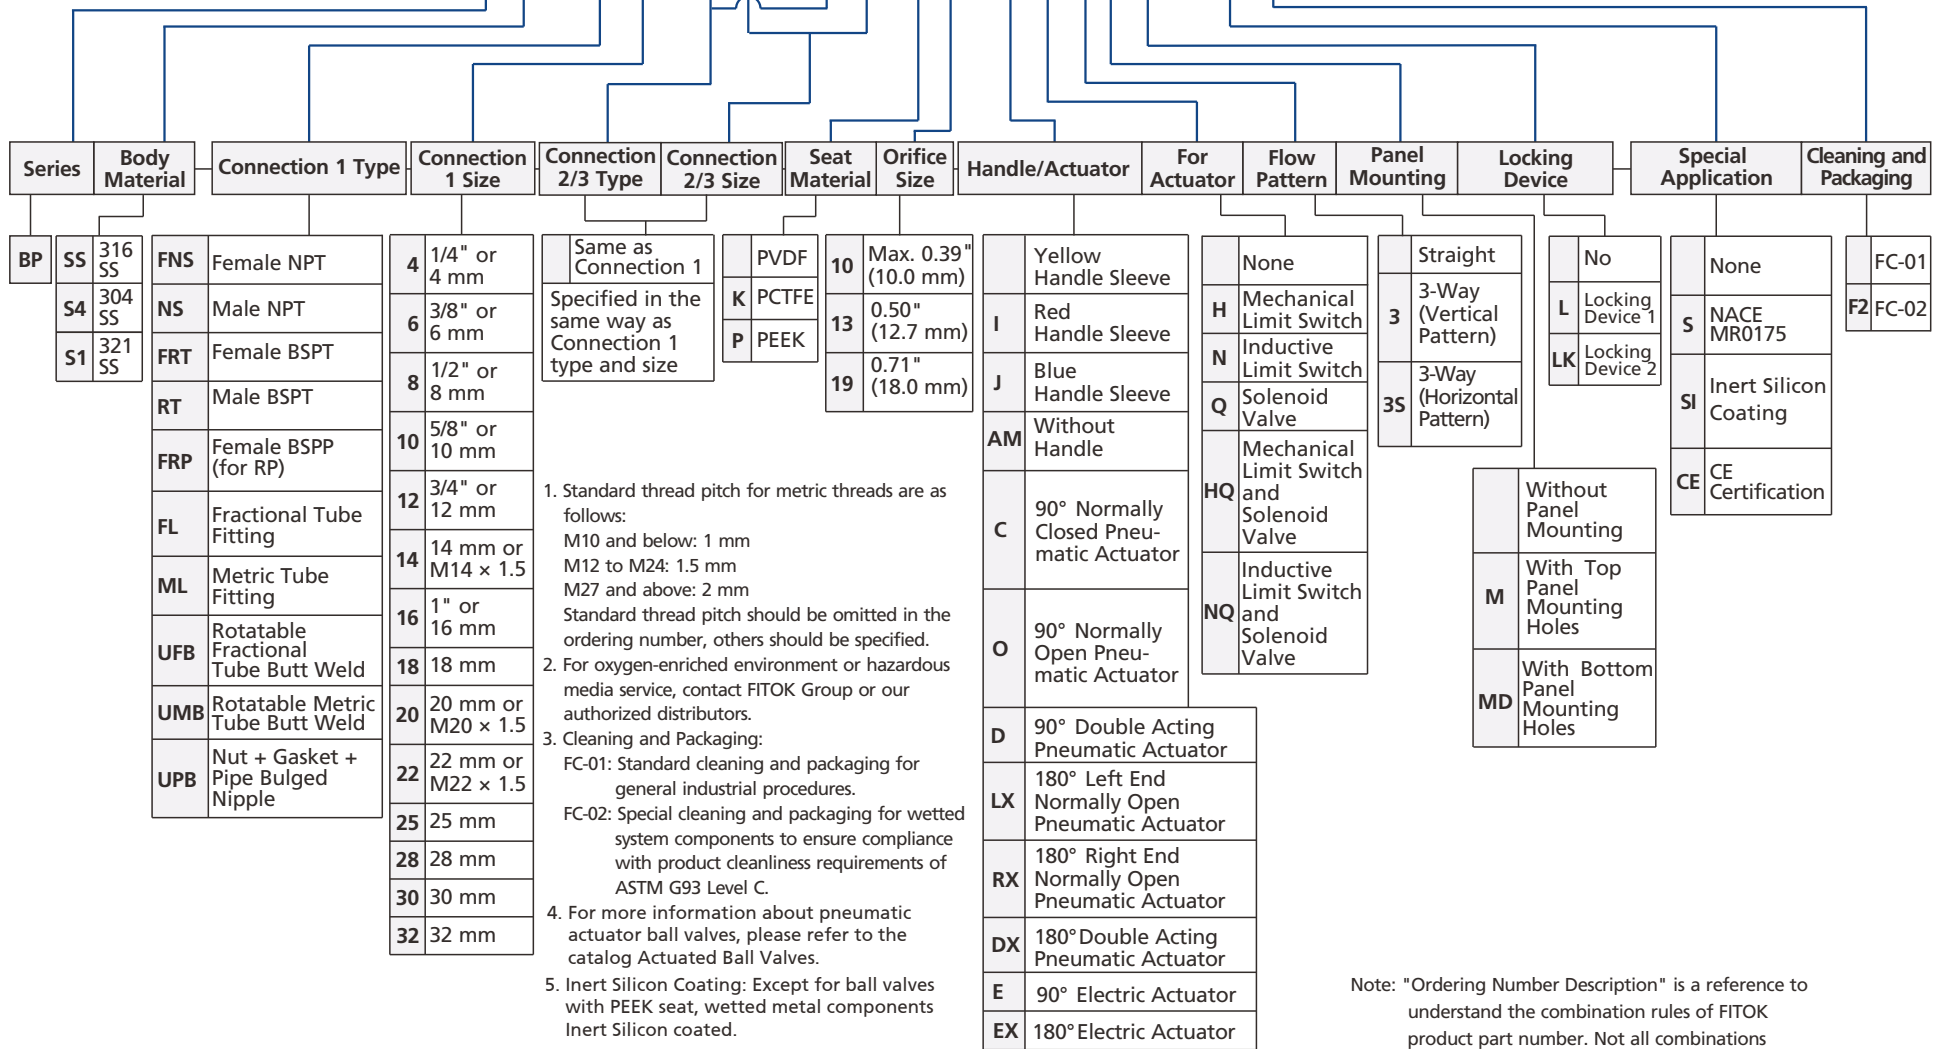

- Standard thread pitch for metric threads are as follows:
M10 and below: 1 mm
M12 to M24: 1.5 mm
M27 and above: 2 mm
Standard thread pitch should be omitted in the ordering number, others should be specified.
- For oxygen-enriched environment or hazardous media service, contact FITOK Group or our authorized distributors.
- Cleaning and Packaging:
FC-01: Standard cleaning and packaging for general industrial procedures.
FC-02: Special cleaning and packaging for wetted system components to ensure compliance with product cleanliness requirements of ASTM G93 Level C.
- For more information about pneumatic actuator ball valves, please refer to the catalog Actuated Ball Valves.
- Inert Silicon Coating: Except for ball valves with PEEK seat, wetted metal components Inert Silicon coated.
- CE certification is available. For more information, please contact FITOK group or our authorized distributors.
- The rated working pressure of BP series ball valves for "NACE MRO175" application is lower than that of standard valves. For detailed pressure values, please contact FITOK Group or our authorized distributors.

Note: "Ordering Number Description" is a reference to understand the combination rules of FITOK product part number. Not all combinations are available.

Hex Bar Stock Ball Valves


BR Series

Features

- Working pressures up to 1,000 psig (69 bar)
- Working temperature: -20°F to 450°F (-28°C to 232°C)
- Cv up to 17.35
- Compact design for minimal space requirements
- Floating ball design compensates for seat wear, improving leak-tight integrity
- Blowout-proof stem minimizes failures caused by stem movement or looseness
- Multiple handle types available
- Each valve is factory leak-tested with nitrogen or compressed air at rated pressure




Pressure vs. Temperature

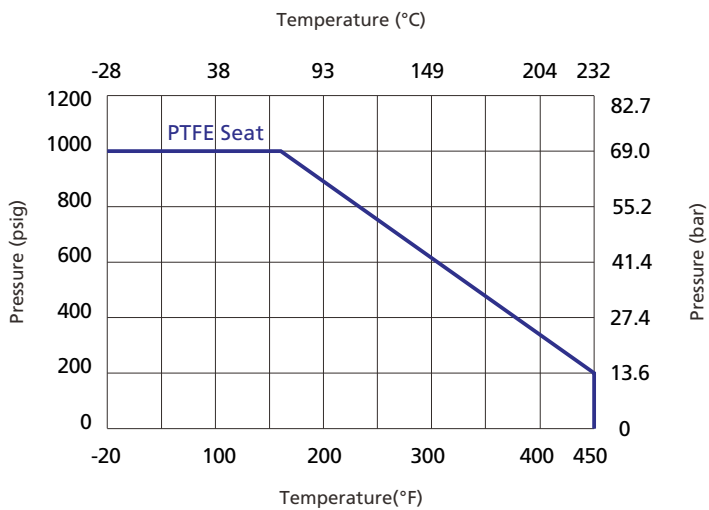

Standard Materials of Construction


Bar Stock Body

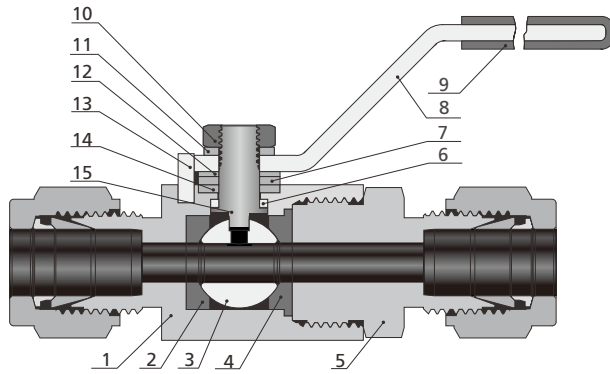


Handle Options




Lever Handle




Aluminium Handle (-U)




Nylon Handle (-NY)




Butterfly Handle (-T)



Handle with Locking Device (-LB)



K-Shaped Handle (-KS)



Scorpion Handle with Locking Device (-FZLB)

Ball Valves
Plug Valves


Item	Component	Material/Specification		
1	Body	<i>316 SS/A479</i>	<i>Alloy 400/B164</i>	<i>Brass C36000/B16</i>
2	Front Seat	<i>PTFE/D1710</i>		
3	Ball	<i>316 SS/A479</i>	<i>Alloy 400/B164</i>	<i>316 SS/A479</i>
4	Back Seat	<i>PTFE/D1710</i>		
5	End Connection	<i>316 SS/A479</i>	<i>Alloy 400/B164</i>	<i>Brass C36000/B16</i>
6	Lower Packing	<i>PTFE/D1710</i>		
7	Washer	<i>316 SS/A479</i>		
8	Handle	<i>304 SS/A240</i>		
8a		Aluminium		
8b		Nylon with 304 SS insert		
9	Sleeve	Vinyl ester		
10	Stem Nut	Stainless steel		
11	Gasket	Stainless steel		
12	Coned-disc Spring	S17700/A693		
13	Stop Pin ^①	Stainless steel		
14	Upper Packing	<i>PTFE/D1710</i>		
15	Stem	<i>316 SS/A479</i>	<i>Alloy 400/B164</i>	<i>316 SS/A479</i>
16	Lock Block	<i>304 SS/A240</i>		

Note: Wetted components are listed in italics.

① A handle with a locking device does not include a stop pin.

Dimensions

Bar Stock Body

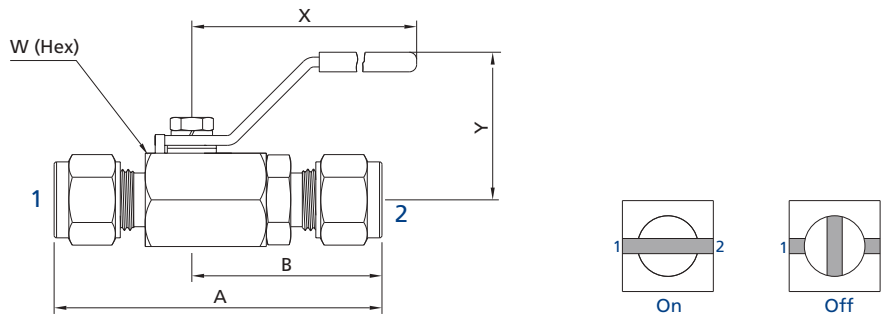


Basic Ordering Number	Connection Type and Size Connection 1/2	Orifice in. (mm)	Cv	Dimensions, in. (mm)				
				A	B	W	X	Y
BR□□-ML6-05	6 mm FITOK	0.19 (4.8)	1.25	2.57 (65.2)	1.50 (38.1)	3/4 (19.05)	2.36 (60)	1.18 (30)
BR□□-ML8-05	8 mm FITOK			2.63 (66.8)	1.53 (38.8)			
BR□□-FL4-05	1/4" FITOK			2.57 (65.2)	1.50 (38.1)			
BR□□-FL5-05	5/16" FITOK			2.63 (66.8)	1.53 (38.8)			
BR□□-FNS2-05	1/8 Female NPT			1.85 (47.0)	1.08 (27.4)			
BR□□-FRP2-05	1/8 Female BSPP			2.00 (50.0)	1.14 (29.0)			
BR□□-FRP4-05	1/4 Female BSPP			2.00 (50.0)	1.14 (29.0)			
BR□□-FNS4-05	1/4 Female NPT			1.85 (47.0)	1.08 (27.4)			
BR□□-ML10-07	10 mm FITOK	0.28 (7.1)	2.50	2.87 (72.9)	1.68 (42.7)	7/8 (22.23)	2.36 (60)	1.26 (32)
BR□□-FL6-07	3/8" FITOK			2.03 (51.6)	1.18 (30.0)			
BR□□-FRP6-07	3/8 Female BSPP			2.03 (51.6)	1.18 (30.0)			
BR□□-FNS6-07	3/8 Female NPT	0.35 (8.9)	5.30	3.15 (80.0)	1.83 (46.5)	1 1/16 (27.0)	3.15 (80)	1.54 (39)
BR□□-ML14-10	14 mm FITOK			3.24 (82.2)	1.87 (47.5)			
BR□□-FL8-10	1/2" FITOK			3.15 (80.0)	1.83 (46.5)			
BR□□-FL10-10	5/8" FITOK			3.24 (82.2)	1.87 (47.5)			
BR□□-FRP8-10	1/2 Female BSPP			2.08 (53.0)	1.12 (28.5)	15/16 (24.0)		
BR□□-FNS8-10	1/2 Female NPT			2.08 (53.0)	1.12 (28.5)			
BR□□-ML16-13	16 mm FITOK	0.47 (12.0)	8.60	3.50 (88.9)	2.00 (50.8)	1 1/4 (31.75)	3.94 (100)	2.03 (51.7)
BR□□-ML18-13	18 mm FITOK			2.48 (63.0)	1.30 (33.0)			
BR□□-FL12-13	3/4" FITOK			2.39 (60.7)	1.20 (30.5)			
BR□□-FRP12-13	3/4 Female BSPP			2.39 (60.7)	1.20 (30.5)			
BR□□-FNS12-13	3/4 Female NPT	0.63 (16.0)	17.35	3.96 (100.6)	2.24 (56.8)	1 1/2 (38.1)	3.94 (100)	2.15 (54.8)
BR□□-ML22-16	22 mm FITOK			4.31 (109.5)	2.42 (61.5)			
BR□□-ML25-16	25 mm FITOK			3.25 (82.6)	1.63 (41.3)			
BR□□-FL16-16	1" FITOK			3.00 (76.5)	1.50 (38.1)			
BR□□-FRP16-16	1 Female BSPP			3.00 (76.5)	1.50 (38.1)			
BR□□-FNS16-16	1 Female NPT			3.00 (76.5)	1.50 (38.1)			


1. FITOK means FITOK double ferrule tube fittings.
2. Sizes and types listed are standard. Other sizes and types are available upon request, please contact FITOK Group or our authorized distributors.
3. Dimensions are shown with FITOK tube fitting nuts finger-tightened. All dimensions are for reference only and are subject to change. For dimensions not shown above, please contact FITOK Group or our authorized distributors.

Locking Device

Body Material	Orifice	Locking Hole Diameter in. (mm)	Example
A variety of optional materials (bar stock)	05	0.19 (4.8)	BRSS-ML12-10-LB BRSS-ML12-10-FZLB
	07		
	10	0.24 (6.2)	
	13		
	16		



BRSS-ML12-10-LB



BRSS-ML12-10-FZLB

Note: Locking device applies only to lever and scorpion handles. For other handle types requiring a locking device, please contact FITOK Group or our authorized distributors.


Seal Kits

Valve Orifice	Basic Seal Kit Ordering Number	Content
05	BRSS-05-RK	Front seat, back seat, ball, lower packing, upper packing, instructions
07	BRSS-07-RK	
10	BRSS-10-RK	
13	BRSS-13-RK	
16	BRSS-16-RK	

1. Seal kit components are the same materials and grades listed in materials of construction.
2. The listed basic seal kit ordering numbers specify 316 stainless steel material. To order kits with other materials, such as 304 stainless steel material, replace "SS" with "S4" in the ordering number.
Example: BR54-05-RK

Ordering Number Description

BRSS - ML8 - FL4 - 05 - JLB - SF2

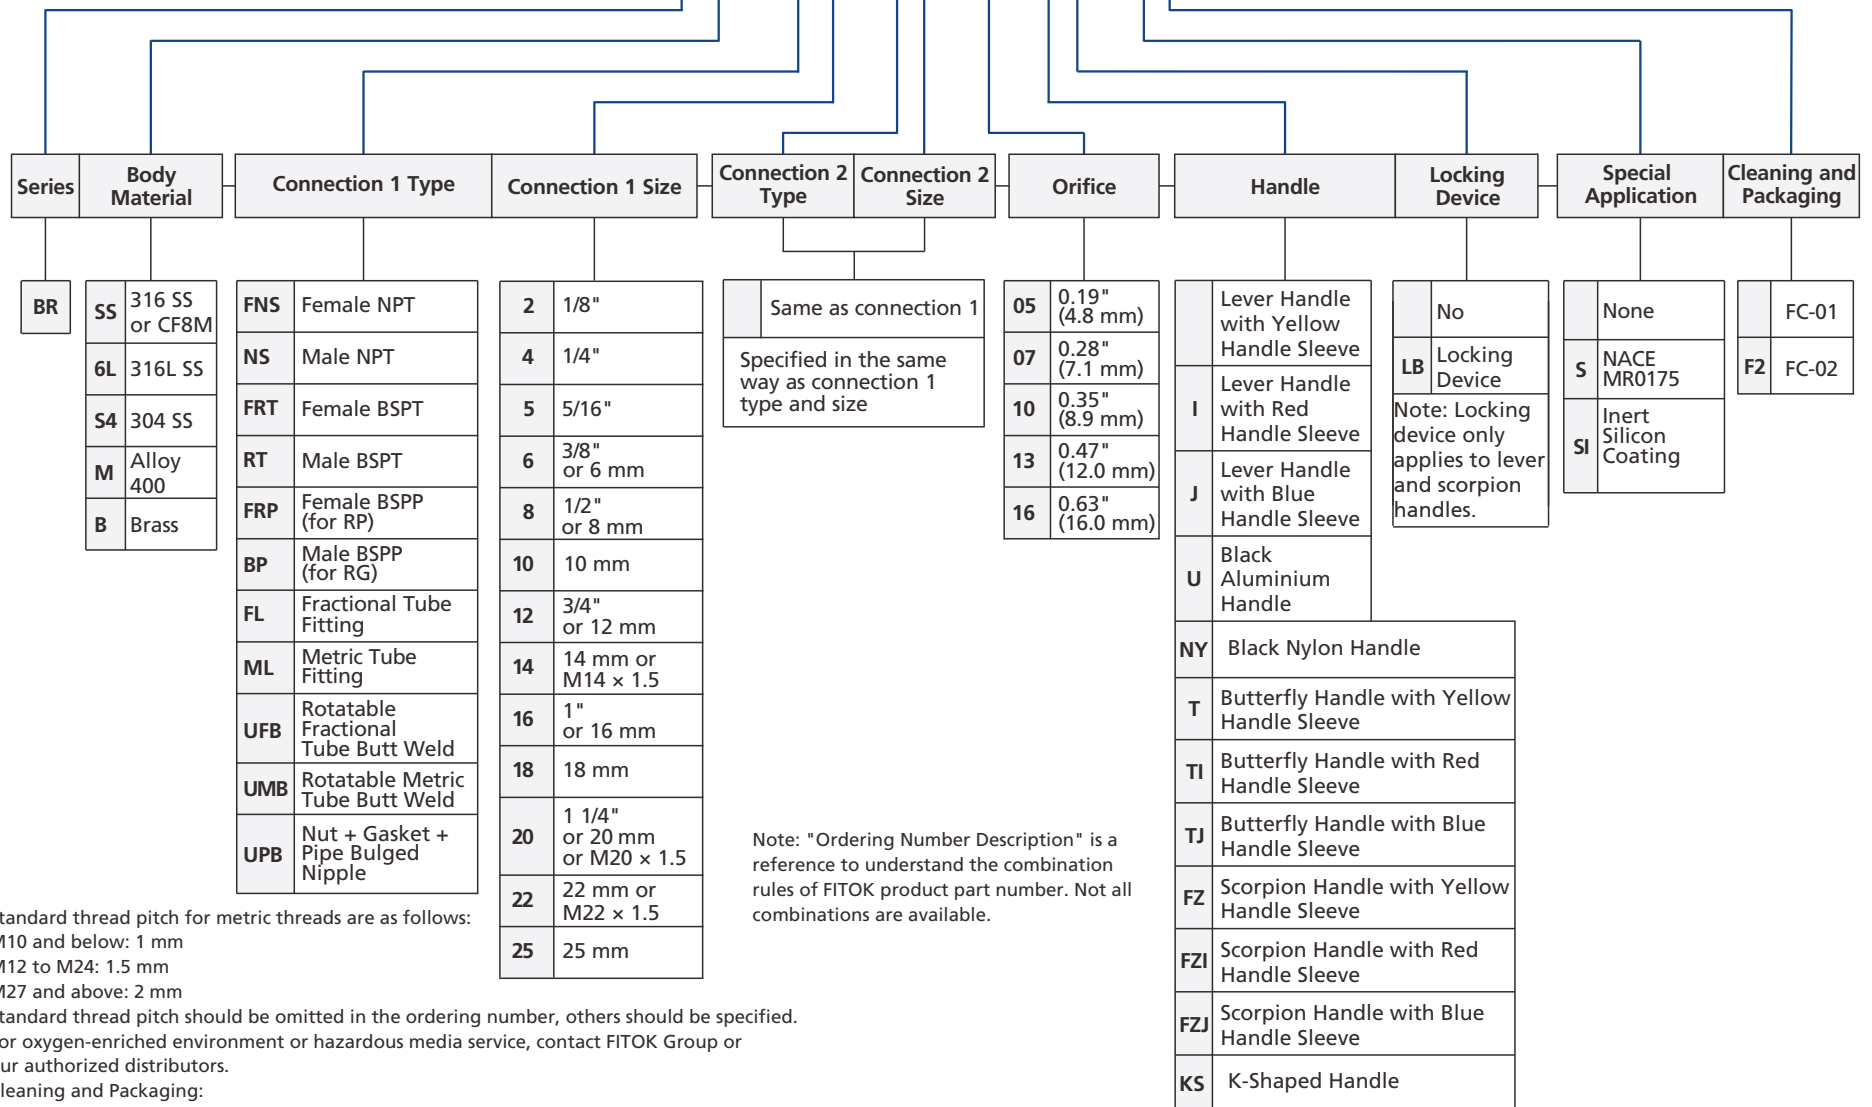

Note: "Ordering Number Description" is a reference to understand the combination rules of FITOK product part number. Not all combinations are available.

- Standard thread pitch for metric threads are as follows:
 M10 and below: 1 mm
 M12 to M24: 1.5 mm
 M27 and above: 2 mm
 Standard thread pitch should be omitted in the ordering number, others should be specified.
- For oxygen-enriched environment or hazardous media service, contact FITOK Group or our authorized distributors.
- Cleaning and Packaging:
 FC-01: Standard cleaning and packaging for general industrial procedures.
 FC-02: Special cleaning and packaging for wetted system components to ensure compliance with product cleaning requirement of ASTM G93 Level C.
- Inert Silicon Coating: Wetted metal components Inert Silicon coated.

Hex Bar Stock Ball Valves


BRC Series

Features


- ⦿ Working pressures up to 2,000 psig (138 bar)
- ⦿ Working temperature: -65°F to 400°F (-54°C to 204°C)
- ⦿ Cv up to 17.35
- ⦿ Compact design for minimal space requirements
- ⦿ Floating ball design compensates for seat wear, improving leak-tight integrity
- ⦿ Blowout-proof stem minimizes failures caused by stem movement or looseness
- ⦿ Multiple handle types available
- ⦿ O-ring stem packing ball valves available, requiring no packing adjustment
- ⦿ Each valve is factory leak-tested with nitrogen or compressed air at rated pressure



Pressure vs. Temperature

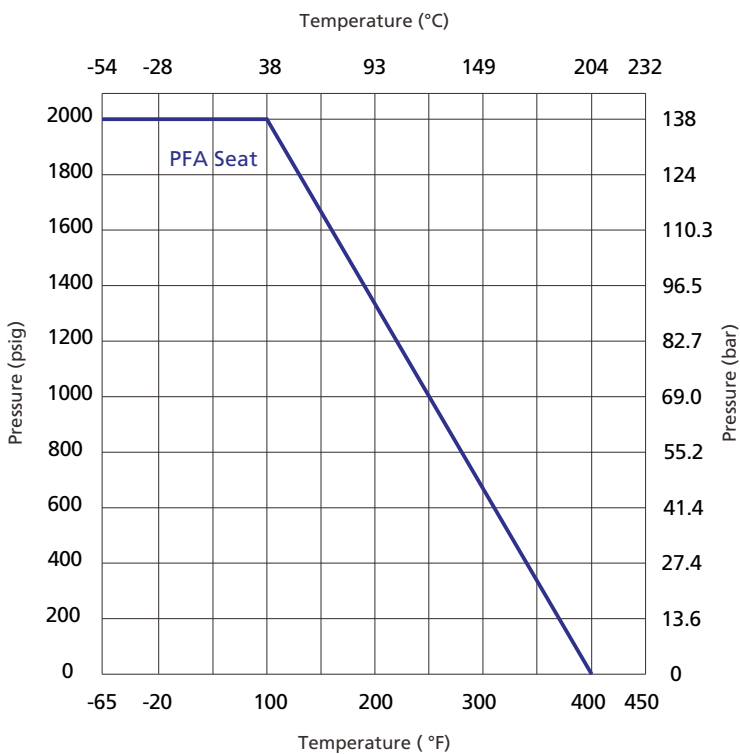

Standard Materials of Construction

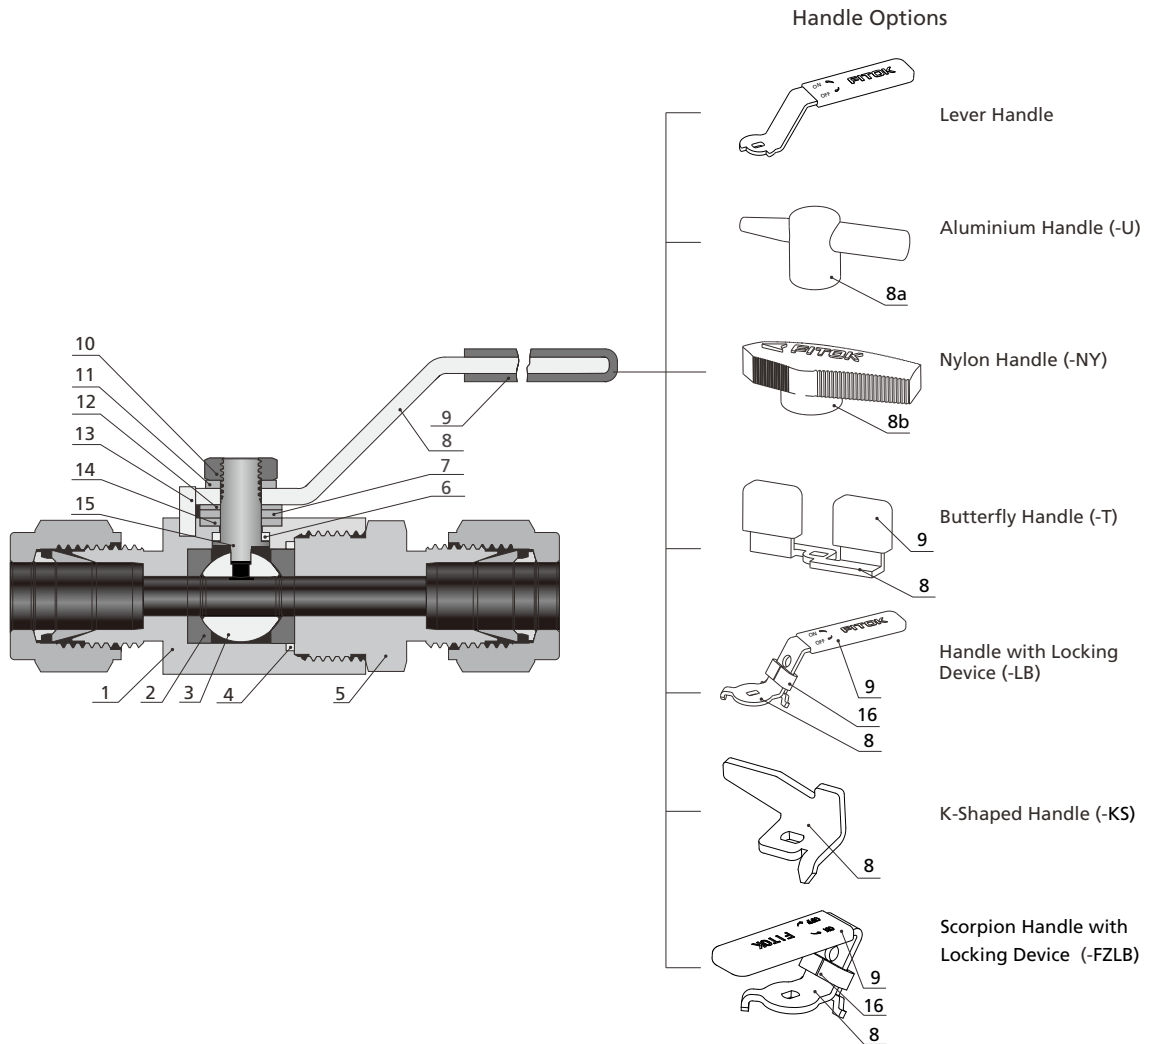


Ball Valves
Plug Valves

Item	Component	Material/Specification	
1	<i>Body</i>	<i>316 SS/A479</i>	<i>Alloy 400/B164</i>
2	<i>Seat</i>	<i>PFA</i>	
3	<i>Ball</i>	<i>316 SS/A479</i>	<i>Alloy 400/B164</i>
4	<i>Sealing Gasket</i>	<i>316L SS/A269</i>	<i>Alloy 400/B164</i>
5	<i>End Connection</i>	<i>316 SS/A479</i>	<i>Alloy 400/B164</i>
6	<i>Lower Packing</i>	<i>RPTFE</i>	
7	<i>Washer</i>	<i>316 SS/A479</i>	
8	Handle	<i>304 SS/A240</i>	
8a		Aluminium	
8b		Nylon with 304 SS insert	
9	<i>Sleeve</i>	<i>Vinyl ester</i>	
10	<i>Stem Nut</i>	<i>Stainless steel</i>	
11	<i>Gasket</i>	<i>Stainless steel</i>	
12	<i>Coned-disc Spring</i>	<i>S17700/A693</i>	
13	<i>Stop Pin^①</i>	<i>Stainless steel</i>	
14	<i>Upper Packing</i>	<i>RPTFE</i>	
15	<i>Stem</i>	<i>316 SS/A479</i>	<i>Alloy 400/B164</i>
16	<i>Lock Block</i>	<i>304 SS/A240</i>	

Note: Wetted components are listed in italics.

① A handle with a locking device does not include a stop pin.

Dimensions

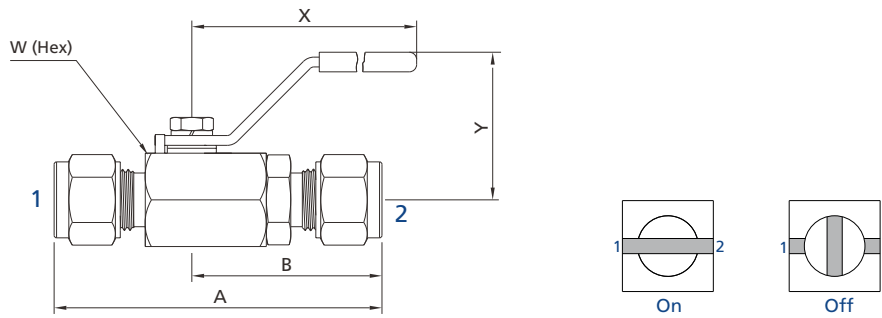

Basic Ordering Number	Connection Type and Size	Orifice in. (mm)	Cv	Dimensions, in. (mm)				
				A	B	W	X	Y
BRC□□-ML6-05	6 mm FITOK	0.19 (4.8)	1.25	2.57 (65.2)	1.50 (38.1)	3/4 (19.05)	2.36 (60)	1.18 (30)
BRC□□-ML8-05	8 mm FITOK			2.63 (66.8)	1.53 (38.8)			
BRC□□-FL4-05	1/4" FITOK			2.57 (65.2)	1.50 (38.1)			
BRC□□-FL5-05	5/16" FITOK			2.63 (66.8)	1.53 (38.8)			
BRC□□-FNS2-05	1/8 Female NPT			1.85 (47.0)	1.08 (27.4)			
BRC□□-FRP2-05	1/8 Female BSPP			2.00 (50.0)	1.14 (29.0)			
BRC□□-FRP4-05	1/4 Female BSPP			2.00 (50.0)	1.14 (29.0)			
BRC□□-FNS4-05	1/4 Female NPT			1.85 (47.0)	1.08 (27.4)			
BRC□□-ML10-07	10 mm FITOK	0.28 (7.1)	2.50	2.87 (72.9)	1.68 (42.7)	7/8 (22.23)	2.36 (60)	1.26 (32)
BRC□□-FL6-07	3/8" FITOK			2.03 (51.6)	1.18 (30.0)			
BRC□□-FRP6-07	3/8 Female BSPP			2.03 (51.6)	1.18 (30.0)			
BRC□□-FNS6-07	3/8 Female NPT	0.35 (8.9)	5.30	3.15 (80.0)	1.83 (46.5)	1 1/16 (27.0)	3.15 (80)	1.54 (39)
BRC□□-ML12-10	12 mm FITOK			3.24 (82.2)	1.87 (47.5)			
BRC□□-ML14-10	14 mm FITOK			3.15 (80.0)	1.83 (46.5)			
BRC□□-FL8-10	1/2" FITOK			3.24 (82.2)	1.87 (47.5)			
BRC□□-FL10-10	5/8" FITOK			2.08 (53.0)	1.12 (28.5)	15/16 (24.0)		
BRC□□-FRP8-10	1/2 Female BSPP			2.08 (53.0)	1.12 (28.5)			
BRC□□-FNS8-10	1/2 Female NPT	0.47 (12.0)	8.60	3.50 (88.9)	2.00 (50.8)	1 1/4 (31.75)	3.94 (100)	2.03 (51.7)
BRC□□-ML16-13	16 mm FITOK			3.13 (79.5)	1.95 (49.5)			
BRC□□-ML18-13	18 mm FITOK			3.13 (79.5)	1.95 (49.5)			
BRC□□-FL12-13	3/4" FITOK			3.13 (79.5)	1.95 (49.5)			
BRC□□-FRP12-13	3/4 Female BSPP	0.63 (16.0)	17.35	3.96 (100.6)	2.24 (56.8)	1 1/2 (38.1)	2.15 (54.8)	
BRC□□-FNS12-13	3/4 Female NPT			4.31 (109.5)	2.42 (61.5)			
BRC□□-ML22-16	22 mm FITOK			3.68 (93.4)	2.14 (54.3)			
BRC□□-ML25-16	25 mm FITOK			3.43 (87.1)	2.01 (51.1)			
BRC□□-FL16-16	1" FITOK							
BRC□□-FRP16-16	1 Female BSPP							
BRC□□-FNS16-16	1 Female NPT							

1. FITOK means FITOK double ferrule tube fittings.
2. Sizes and types listed are standard. Other sizes and types are available upon request, please contact FITOK Group or our authorized distributors.
3. Dimensions are shown with FITOK tube fitting nuts finger-tightened. All dimensions are for reference only and are subject to change. For dimensions not shown above, please contact FITOK Group or our authorized distributors.

O-Ring Stem Packing Ball Valves

☉ Suitable for applications where adjusting the packing during valve operation is inconvenient.

Materials of Construction

Item	Component	Material/Specification
1	<i>O-ring</i>	<i>Fluorocarbon FKM/EPDM/Buna N/FFKM</i>
2	<i>Lower Packing</i>	<i>PEEK</i>
2	Seal	PTFE

Wetted components are listed in italics.

Other components are consistent with standard materials of construction.

Temperature Range

Stem Packing Material	Designator	Temperature Range °F (°C)
<i>Fluorocarbon FKM</i>	<i>VI</i>	<i>5 ~ 400 (-15 ~ 204)</i>
<i>EPDM</i>	<i>E</i>	<i>-40 ~ 250 (-40 ~ 121)</i>
<i>Buna N</i>	<i>B</i>	<i>0 ~ 250 (-17 ~ 121)</i>
<i>FFKM</i>	<i>Z</i>	<i>14 ~ 400 (-10 ~ 204)</i>

Ordering Information



☉ To order an O-ring upper seal ball valve, add the suffix VI to the standard part number.

Example: BRCSS-ML12-10VI


Locking Device

Body Material	Orifice	Locking Hole Diameter in. (mm)	Example
A variety of optional materials (bar stock)	05	0.19 (4.8)	BRCSS-ML12-10-LB BRCSS-ML12-10-FZLB
	07		
	10	0.24 (6.2)	
	13		
	16		

Note: The locking device is only applicable to lever and scorpion handles. For other handle types requiring a locking device, please contact FITOK Group or our authorized distributors.

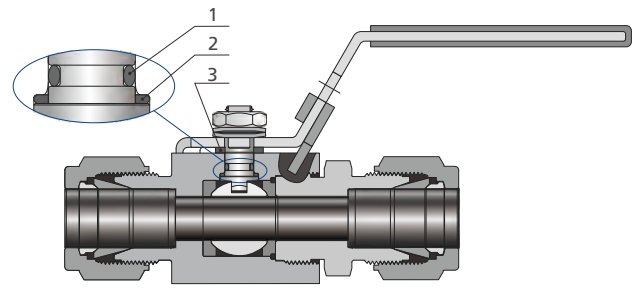

BRCSS-ML12-10-LB



BRCSS-ML12-10-FZLB


Seal Kits

Valve Orifice	Basic Seal Kit Ordering Number	Content
05	BRCSS-05-RK	Seat, sealing gasket, ball, lower packing, upper packing, instructions
07	BRCSS-07-RK	
10	BRCSS-10-RK	
13	BRCSS-13-RK	
16	BRCSS-16-RK	

1. Seal kit components are the same materials and grades listed in materials of construction.
2. The listed basic seal kit ordering numbers specify 316 stainless steel material. To order kits with other materials, such as 304 stainless steel material, replace "SS" with "S4" in the ordering number.
Example: BRCSS-05-RK

Ordering Number Description

BRCSS - ML8 - FL4 - 05B - JLB - SF2

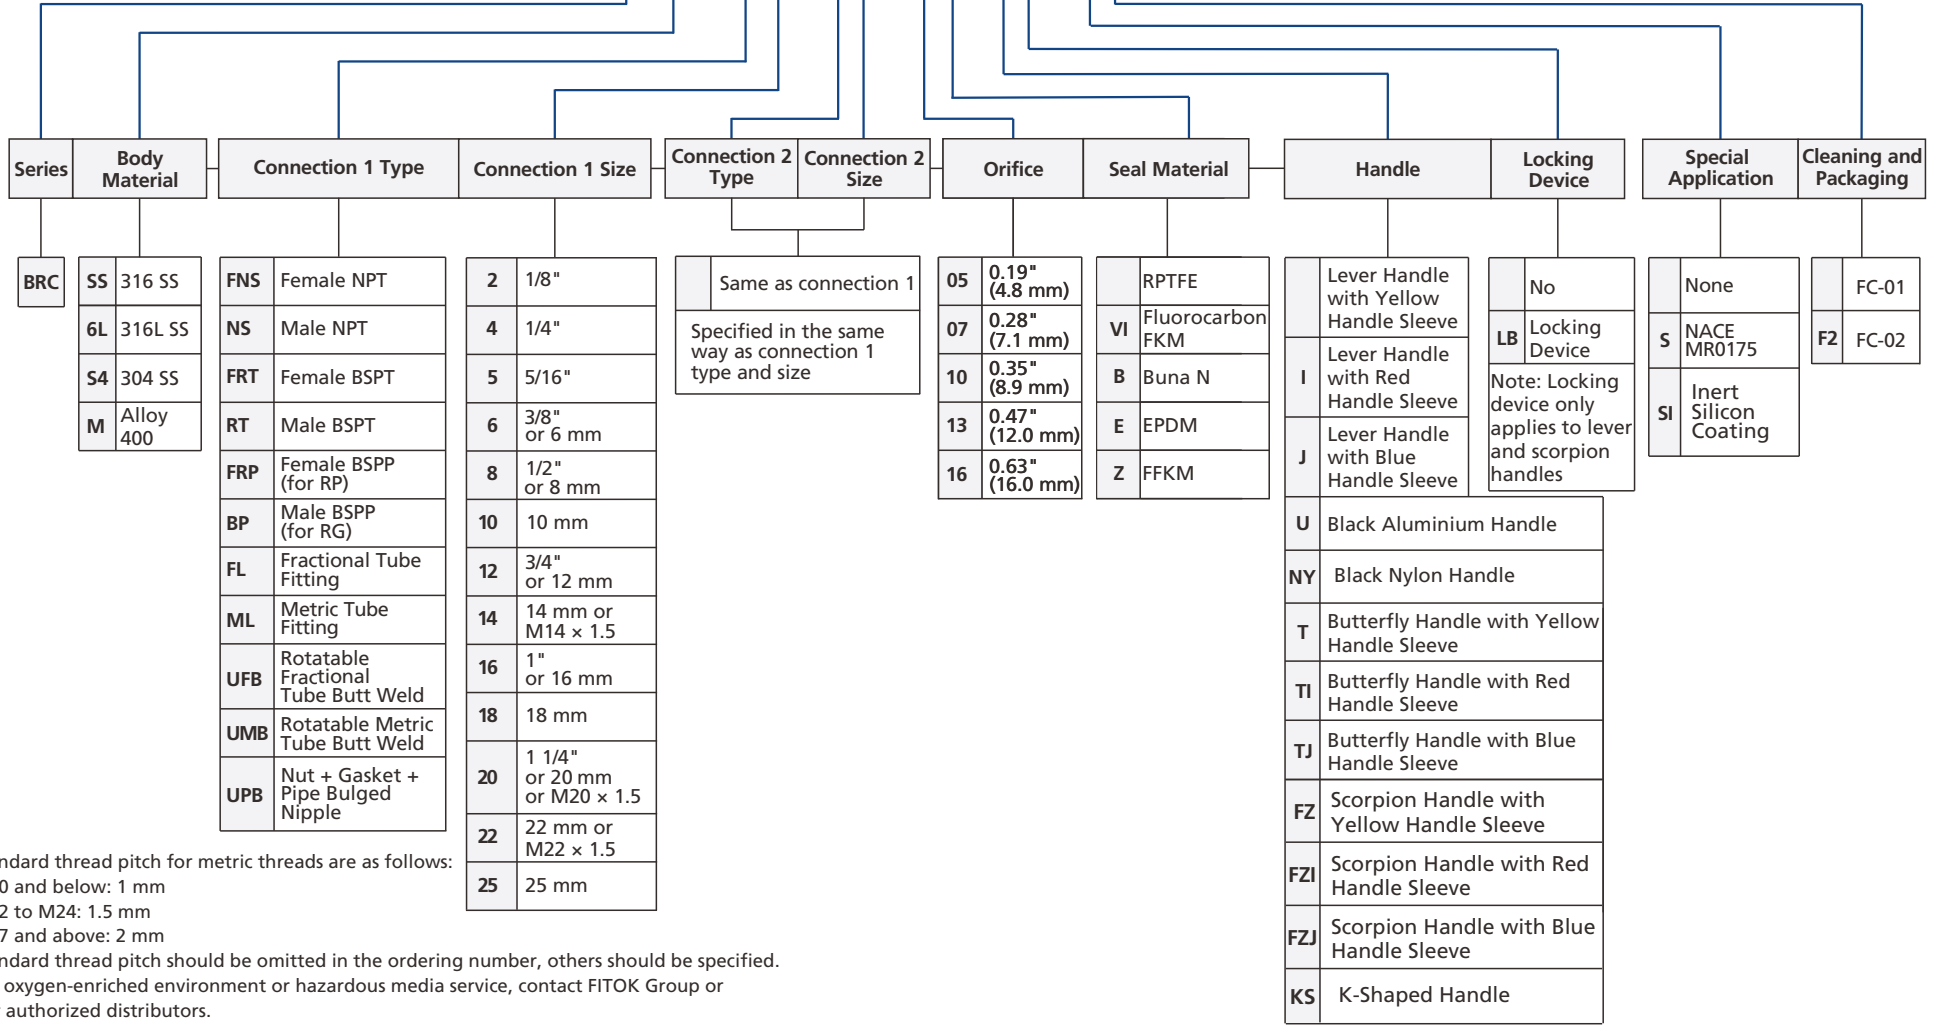

- Standard thread pitch for metric threads are as follows:
M10 and below: 1 mm
M12 to M24: 1.5 mm
M27 and above: 2 mm
Standard thread pitch should be omitted in the ordering number, others should be specified.
- For oxygen-enriched environment or hazardous media service, contact FITOK Group or our authorized distributors.
- Cleaning and Packaging:
FC-01: Standard cleaning and packaging for general industrial procedures.
FC-02: Special cleaning and packaging for wetted system components to ensure compliance with product cleaning requirement of ASTM G93 Level C.
- Inert Silicon Coating: Wetted metal components Inert Silicon coated.

Note: "Ordering Number Description" is a reference to understand the combination rules of FITOK product part number. Not all combinations are available.

High Performance Ball Valves

BV Series

Features


- ⦿ Working pressures up to 6,000 psig (414 bar)
- ⦿ Working temperature: -65°F to 450°F (-54°C to 232°C)
- ⦿ Cv up to 6.42
- ⦿ Available in 2-way or 3-way flow patterns
- ⦿ Angle-pattern flow path available
- ⦿ Each valve is factory leak-tested with nitrogen or compressed air at rated pressure




Ball Valves
Plug Valves

Pressure vs. Temperature

316 SS Body

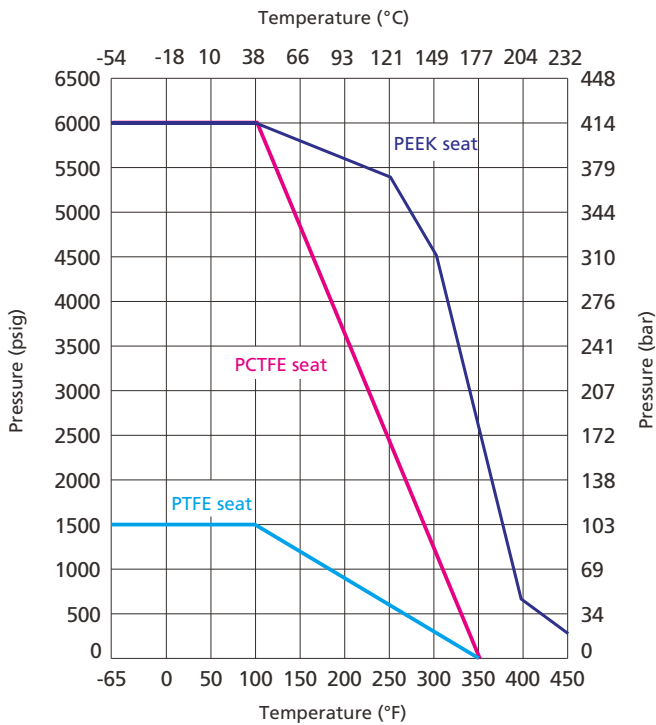

Brass Body

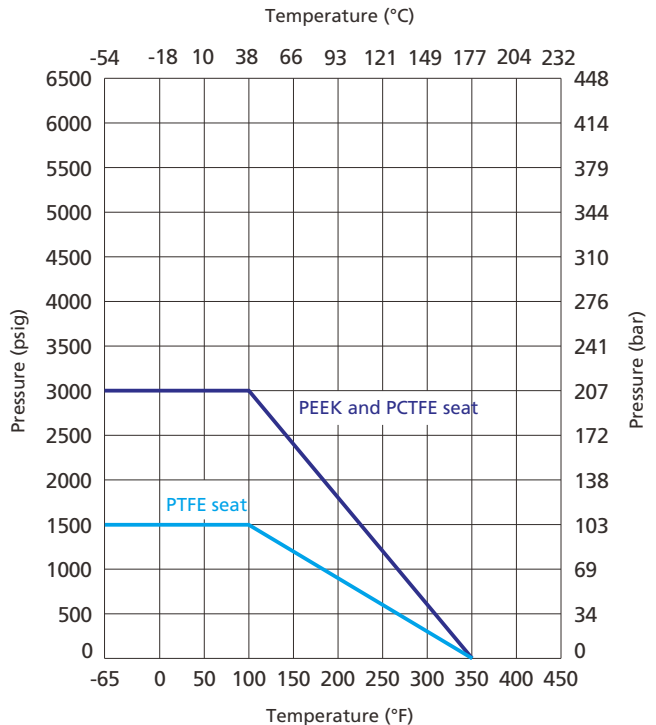

Note: The working pressure of valves is restricted by materials of the valve body and seat, as well as end connections. When choosing a valve for your applications, please refer to the above Temperature vs. Pressure Curves and the pressure rating in the dimension table. The minimum value shall be the pressure rating of the valve.


Pressure Rating@100°F (38°C)

End Connection	Pressure Rating, psig (bar)	
	Brass	316 SS
FL1, FL2, FL4, ML3, ML6, FNS2, FNS4, FNS6, FNS8, FNS12 NS2, NS4, NS6, NS8, NS12 RT2, RT4, RT6, RT8, RT12 FRT2, FRT4, FRT6, FRT8, FRT12 FRP2, FRP4, FRP6, FRP8, FRP12 BP2, BP4, BP6, BP8, BP12	3000 (207)	6000 (414)
ML8	2300 (159)	
FL6	2200 (152)	
FL8	2100 (145)	
ML12	2000 (138)	
ML10, ML14	1900 (131)	
FL12	1800 (124)	5800 (400)
ML16	1700 (117)	
ML20	1600 (110)	5500 (379)
ML18		5400 (372)
ML22	1450 (100)	4900 (338)

Ball Valves
Plug Valves

Standard Materials of Construction


Straight Valves

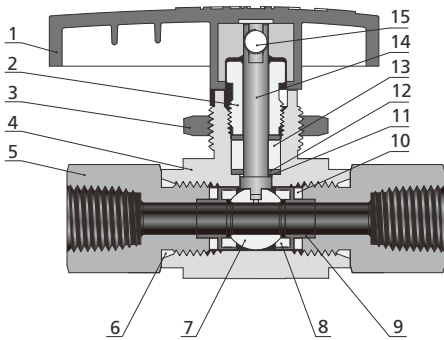

Item	Component	Valve Body Material	
		SS	Brass
1	Handle	Nylon or Aluminium	
2	Packing Nut	316 SS/A479	C36000/B16
3	Panel Nut	316 SS/A479	
4	Body	<i>CF8M/A351</i>	<i>C37700/B283</i>
5	End Connection	<i>316 SS/A479</i>	<i>C36000/B16</i>
6	Connection Ring	PTFE	
7	Ball	<i>316 SS/A479</i>	
8	Seat	<i>PTFE or PCTFE or PEEK</i>	
9	Seat Retainer	<i>316 SS/A479</i>	
10	Seat Packing	PTFE	
11	Stem Back-up Ring	PEEK	
12	Stem Washer	<i>316/A479</i>	
13	Stem Packing	PTFE	
14	Stem	<i>316 SS/A479</i>	
15	Set Screw	Zinc-plated carbon steel	
	Lubricants	<i>Fluorinated-based</i>	

Note: Wetted components are listed in italics.
For other materials, please contact FITOK Group or our authorized distributors.

3-way Valves

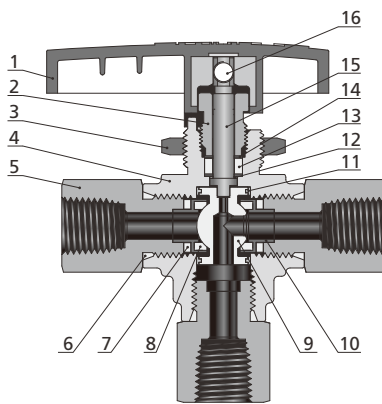


Item	Component	Valve Body Material	
		SS	Brass
1	Handle	Nylon or Aluminium	
2	Packing Nut	316 SS/A479	C36000/B16
3	Panel Nut	316 SS/A479	
4	<i>Body</i>	<i>CF8M/A351</i>	<i>C37700/B283</i>
5	<i>End Connection</i>	<i>316 SS/A479</i>	<i>C36000/B16</i>
6	<i>Connection Ring</i>	<i>PTFE</i>	
7	<i>Seat Packing</i>	<i>PTFE</i>	
8	<i>Seat</i>	<i>PTFE or PCTFE or PEEK</i>	
9	<i>Ball</i>	<i>316 SS/A479</i>	
10	<i>Seat Retainer</i>	<i>316 SS/A479</i>	
11	<i>Trunnion Bearing</i>	<i>PEEK</i>	
12	<i>Stem Back-up Ring</i>	<i>PEEK</i>	
13	<i>Stem Packing</i>	<i>PEEK</i>	
14	<i>Stem Washer</i>	<i>316 SS/A479</i>	
15	<i>Stem</i>	<i>316 SS/A479</i>	
16	Set Screw	Zinc-plated carbon steel	
	<i>Lubricants</i>	<i>Fluorinated-based</i>	

Note: Wetted components are listed in italics.

For other materials, please contact FITOK Group or our authorized distributors.

Angle Pattern Valves

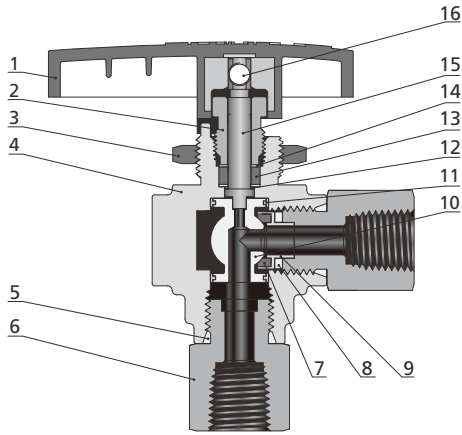



Ball Valves
Plug Valves

Item	Component	Valve Body Material	
		SS	Brass
1	Handle	Nylon or Aluminium	
2	Packing Nut	316 SS/A479	C36000/B16
3	Panel Nut	316 SS/A479	
4	Body	CF8M/A351	C37700/B283
5	Connection Ring	PTFE	
6	End Connection	316 SS/A479	C36000/B16
7	Seat	PTFE or PCTFE or PEEK	
8	Seat Packing	PTFE	
9	Seat Retainer	316 SS/A479	
10	Ball	316 SS/A479	
11	Trunnion Bearing	PEEK	
12	Stem Back-up Ring	PEEK	
13	Stem Packing		
14	Stem Washer	PTFE 316 SS/A479	
15	Stem	316 SS/A479	
16	Set Screw	Zinc-plated carbon Steel	
	Lubricants	Fluorinated-based	

Note: Wetted components are listed in italics.
For other materials, please contact FITOK Group or our authorized distributors.



Dimensions

Straight Valves

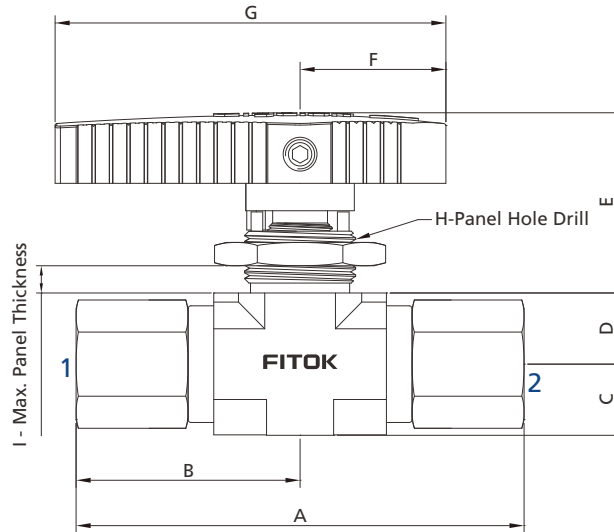

Basic Ordering Number	Connection Type and Size Connection 1/2	Orifice in. (mm)	Cv	Dimensions, in. (mm)																										
				A	B	C	D	E	F	G	H	I																		
BV□□-FL1-01	1/16" FITOK	0.05 (1.3)	0.06	2.60 (66.0)	1.30 (33.0)																									
BV□□-FL2-02	1/8" FITOK	0.09 (2.4)	0.21	2.72 (69.0)	1.36 (34.5)																									
BV□□-ML3-02	3 mm FITOK			2.74 (69.6)	1.37 (34.8)																									
BV□□-FRT2-04	1/8 Female BSPT			0.17 (4.2)	0.93	2.14 (54.4)	1.07 (27.2)	0.36 (9.2)	0.33 (8.5)	0.94 (23.9)	0.79 (20.0)	1.97 (50.0)	0.58 (14.7)	0.18 (4.6)																
BV□□-FRP2-04	1/8 Female BSPP																													
BV□□-FNS2-04	1/8 Female NPT																													
BV□□-RT2-04	1/8 Male BSPT					2.36 (60.0)	1.18 (30.0)																							
BV□□-BP2-04	1/8 Male BSPP																													
BV□□-NS2-04	1/8 Male NPT																													
BV□□-RT4-04	1/4 Male BSPT					2.70 (68.6)	1.35 (34.3)																							
BV□□-BP4-04	1/4 Male BSPP																													
BV□□-NS4-04	1/4 Male NPT																													
BV□□-FL4-05	1/4" FITOK	0.19 (4.7)	1.04			3.48 (88.4)	1.74 (44.2)																							
BV□□-ML6-05	6 mm FITOK					3.50 (89.0)	1.75 (44.5)																							
BV□□-FL6-06	3/8" FITOK	0.25 (6.4)	2.34	3.60 (91.4)	1.80 (45.7)																									
BV□□-ML8-06	8 mm FITOK			3.56 (90.4)	1.78 (45.2)																									
BV□□-ML10-06	10 mm FITOK			3.62 (92.0)	1.81 (46.0)																									
BV□□-FRT4-06	1/4 Female BSPT			3.02 (76.8)	1.51 (38.4)	3.24 (82.2)	1.62 (41.1)	0.48 (12.2)	0.48 (12.2)	1.24 (31.5)	0.59 (25.0)	2.64 (67.0)	0.77 (19.6)	0.25 (6.4)																
BV□□-FRP4-06	1/4 Female BSPP																													
BV□□-FNS4-06	1/4 Female NPT																													
BV□□-RT4-06	1/4 Male BSPT																													
BV□□-BP4-06	1/4 Male BSPP																													
BV□□-NS4-06	1/4 Male NPT																													
BV□□-RT6-06	3/8 Male BSPT																													
BV□□-BP6-06	3/8 Male BSPP																													
BV□□-NS6-06	3/8 Male NPT																													
BV□□-FL8-10	1/2" FITOK			0.41 (10.3)	6.42										4.68 (118.8)	2.34 (59.4)														
BV□□-FL12-10	3/4" FITOK			0.37 (9.5)	5.57																									
BV□□-ML12-10	12 mm FITOK	4.66 (118.4)	2.33 (59.2)																											
BV□□-ML14-10	14 mm FITOK	0.41 (10.3)	6.42	4.84 (123.0)	2.42 (61.5)										0.75 (19.0)	0.71 (18.0)	1.54 (39.0)	1.42 (36.0)	3.78 (96.0)	0.90 (22.9)	0.38 (9.7)									
BV□□-ML16-10	16 mm FITOK																													
BV□□-ML18-10	18 mm FITOK																													
BV□□-ML20-10	20 mm FITOK																													
BV□□-ML22-10	22 mm FITOK					3.90 (99.0)	1.95 (49.5)																							
BV□□-FRT6-10	3/8 Female BSPT																													
BV□□-FRP6-10	3/8 Female BSPP																													
BV□□-FNS6-10	3/8 Female NPT					4.30 (109.2)	2.15 (54.6)																							
BV□□-FRT8-10	1/2 Female BSPT																													
BV□□-FRP8-10	1/2 Female BSPP					3.97 (101.0)	1.99 (50.5)																							
BV□□-FNS8-10	1/2 Female NPT					4.30 (109.2)	2.15 (54.6)																							
BV□□-FRT12-10	3/4 Female BSPT					4.50 (114.2)	2.25 (57.1)																							
BV□□-FRP12-10	3/4 Female BSPP																													
BV□□-FNS12-10	3/4 Female NPT					4.44 (112.8)	2.22 (56.4)																							
BV□□-RT8-10	1/2 Male BSPT																													
BV□□-BP8-10	1/2 Male BSPP																													
BV□□-NS8-10	1/2 Male NPT																													
BV□□-RT12-10	3/4 Male BSPT																													
BV□□-BP12-10	3/4 Male BSPP																													
BV□□-NS12-10	3/4 Male NPT																													

3-way Valves

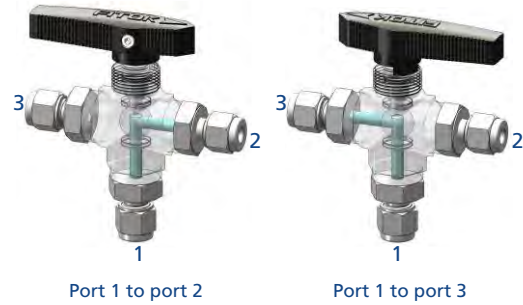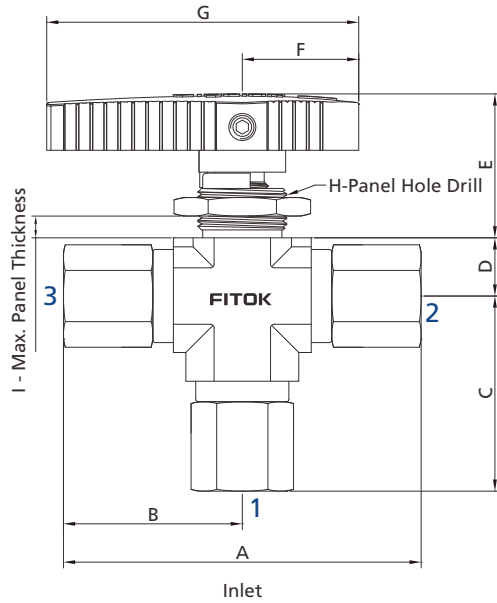


Ball Valves
Plug Valves

Basic Ordering Number	Connection Type and Size	Orifice in. (mm)	Cv	Dimensions, in. (mm)											
				A	B	C	D	E	F	G	H	I			
BV□□-FL1-01-3	1/16" FITOK	0.05 (1.3)	0.06	2.60 (66.0)	1.30 (33.0)	1.35 (34.3)									
BV□□-FL2-02-3	1/8" FITOK	0.09 (2.4)	0.21	2.72 (69.0)	1.36 (34.5)	1.41 (35.8)									
BV□□-ML3-02-3	3 mm FITOK			2.74 (69.6)	1.37 (34.8)	1.42 (36.1)									
BV□□-FRT2-04-3	1/8 Female BSPT	0.12 (3.0)	0.28	2.14 (54.4)	1.07 (27.2)	1.12 (28.5)									
BV□□-FRP2-04-3	1/8 Female BSPP														
BV□□-FNS2-04-3	1/8 Female NPT								0.33 (8.5)	0.94 (23.9)	0.79 (20.0)	1.97 (50.0)	0.58 (14.7)	0.18 (4.6)	
BV□□-RT2-04-3	1/8 Male BSPT					2.36 (60.0)	1.18 (30.0)	1.23 (31.3)							
BV□□-BP2-04-3	1/8 Male BSPP														
BV□□-NS2-04-3	1/8 Male NPT														
BV□□-RT4-04-3	1/4 Male BSPT														
BV□□-BP4-04-3	1/4 Male BSPP					2.70 (68.6)	1.35 (34.3)	1.40 (35.6)							
BV□□-NS4-04-3	1/4 Male NPT														
BV□□-FL4-05-3	1/4" FITOK			0.19 (4.7)	0.70	3.48 (88.4)	1.74 (44.2)	1.88 (47.7)							
BV□□-ML6-05-3	6 mm FITOK					3.50 (89.0)	1.75 (44.5)	1.89 (48.0)							
BV□□-FL6-05-3	3/8" FITOK					3.60 (91.4)	1.80 (45.7)	1.94 (49.2)							
BV□□-ML8-05-3	8 mm FITOK					3.56 (90.4)	1.78 (45.2)	1.92 (48.7)							
BV□□-ML10-05-3	10 mm FITOK					3.62 (92.0)	1.81 (46.0)	1.95 (49.5)							
BV□□-FRT4-05-3	1/4 Female BSPT														
BV□□-FRP4-05-3	1/4 Female BSPP					3.02 (76.8)	1.51 (38.4)	1.65 (41.9)	0.48 (12.2)	1.24 (31.5)	0.59 (25.0)	2.64 (67.0)	0.77 (19.6)	0.25 (6.4)	
BV□□-FNS4-05-3	1/4 Female NPT														
BV□□-RT4-05-3	1/4 Male BSPT														
Bv□□-BP4-05-3	1/4 Male BSPP														
BV□□-NS4-05-3	1/4 Male NPT														
BV□□-RT6-05-3	3/8 Male BSPT					3.24 (82.2)	1.62 (41.1)	1.76 (44.6)							
BV□□-BP6-05-3	3/8 Male BSPP														
BV□□-NS6-05-3	3/8 Male NPT														

Basic Ordering Number	Connection Type and Size Connection 1/2/3	Orifice in. (mm)	Cv	Dimensions, in. (mm)								
				A	B	C	D	E	F	G	H	I
BV□□-FL8-10-3	1/2" FITOK	0.37 (9.5)	3.48	4.68 (118.8)	2.34 (59.4)	2.68 (68.1)	0.71 (18.0)	1.54 (39.0)	1.42 (36.0)	3.78 (96.0)	0.90 (22.9)	0.38 (9.7)
BV□□-FL12-10-3	3/4" FITOK											
BV□□-ML12-10-3	12 mm FITOK											
BV□□-ML14-10-3	14 mm FITOK			4.66(118.4)	2.33 (59.2)	2.67 (67.9)						
BV□□-ML16-10-3	16 mm FITOK											
BV□□-ML18-10-3	18 mm FITOK											
BV□□-ML20-10-3	20 mm FITOK			4.84 (123.0)	2.42 (61.5)	2.76 (70.2)						
BV□□-ML22-10-3	22 mm FITOK											
BV□□-FRT6-10-3	3/8 Female BSPT											
BV□□-FRP6-10-3	3/8 Female BSPP			3.90 (99.0)	1.95 (49.5)	2.29 (58.2)						
BV□□-FNS6-10-3	3/8 Female NPT											
BV□□-FRT8-10-3	1/2 Female BSPT			4.30 (109.2)	2.15 (54.6)	2.49 (63.3)						
BV□□-FRP8-10-3	1/2 Female BSPP			3.97 (101.0)	1.99 (50.5)	2.33 (59.1)						
BV□□-FNS8-10-3	1/2 Female NPT			4.30 (109.2)	2.15 (54.6)	2.49 (63.3)						
BV□□-FRT12-10-3	3/4 Female BSPT											
BV□□-FRP12-10-3	3/4 Female BSPP			4.50 (114.2)	2.25 (57.1)	2.59 (65.8)						
BV□□-FNS12-10-3	3/4 Female NPT											
BV□□-RT8-10-3	1/2 Male BSPT											
BV□□-BP8-10-3	1/2 Male BSPP											
BV□□-NS8-10-3	1/2 Male NPT											
BV□□-RT12-10-3	3/4 Male BSPT			4.44 (112.8)	2.22 (56.4)	2.56 (65.1)						
BV□□-BP12-10-3	3/4 Male BSPP											
BV□□-NS12-10-3	3/4 Male NPT											

Angle Pattern Valves

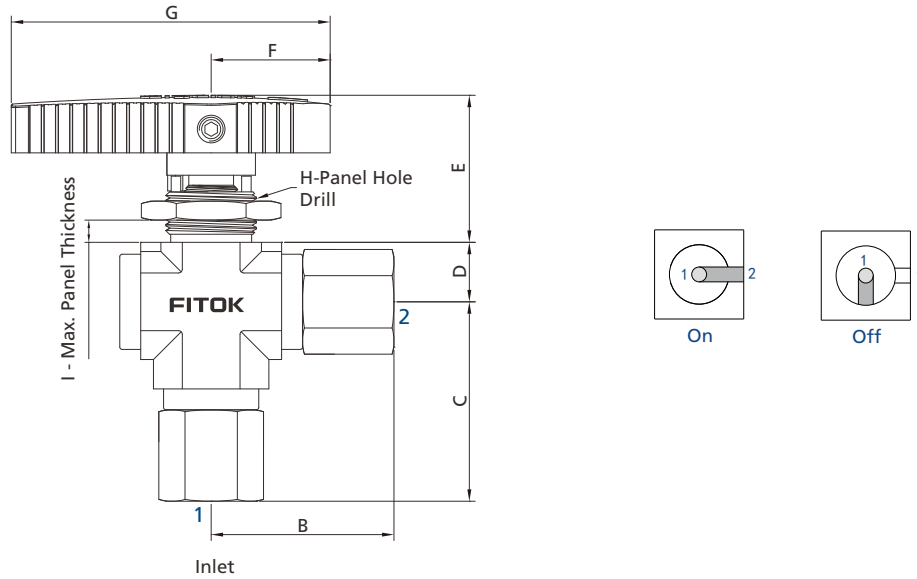

Ball Valves
Plug Valves

Basic Ordering Number	Connection Type and Size	Pressure Rating of End Connections @ 100°F (38°C), psig (bar)		Orifice in. (mm)	Cv	Dimensions, in. (mm)								
		316 SS	Brass			B	C	D	E	F	G	H	I	
BV□□-FL1-01-A	1/16" FITOK	6000 (414)	3000 (207)	0.05 (1.3)	0.06	1.30 (33.0)	1.35 (34.3)							
BV□□-FL2-02-A	1/8" FITOK	6000 (414)	3000 (207)	0.09 (2.4)	0.21	1.36 (34.5)	1.41 (35.8)							
BV□□-ML3-02-A	3 mm FITOK	6000 (414)	3000 (207)			1.37 (34.8)	1.42 (36.1)							
BV□□-FRT2-04-A	1/8 Female BSPT	6000 (414)	3000 (207)	0.12 (3.0)	0.28	1.07 (27.2)	1.12 (28.5)							
BV□□-FRP2-04-A	1/8 Female BSPP	6000 (414)	3000 (207)											
BV□□-FNS2-04-A	1/8 Female NPT	6000 (414)	3000 (207)					0.33 (8.5)	0.94 (23.9)	0.79 (20.0)	1.97 (50.0)	0.58 (14.7)	0.18 (4.6)	
BV□□-RT2-04-A	1/8 Male BSPT	6000 (414)	3000 (207)			1.18 (30.0)	1.23 (31.3)							
BV□□-BP2-04-A	1/8 Male BSPP	6000 (414)	3000 (207)											
BV□□-NS2-04-A	1/8 Male NPT	6000 (414)	3000 (207)											
BV□□-RT4-04-A	1/4 Male BSPT	6000 (414)	3000 (207)											
BV□□-BP4-04-A	1/4 Male BSPP	6000 (414)	3000 (207)			1.35 (34.3)	1.40 (35.6)							
BV□□-NS4-04-A	1/4 Male NPT	6000 (414)	3000 (207)											
BV□□-FL4-05-A	1/4" FITOK	6000 (414)	3000 (207)			0.19 (4.7)	0.70	1.74 (44.2)	1.88 (47.7)					
BV□□-ML6-05-A	6 mm FITOK	6000 (414)	3000 (207)	1.75 (44.5)	1.89 (48.0)									
BV□□-FL6-05-A	3/8" FITOK	6000 (414)	2200 (152)	1.80 (45.7)	1.94 (49.2)									
BV□□-ML8-05-A	8 mm FITOK	6000 (414)	2300 (159)	1.78 (45.2)	1.92 (48.7)									
BV□□-ML10-05-A	10 mm FITOK	6000 (414)	1900 (131)	1.81 (46.0)	1.95 (49.5)									
BV□□-FRT4-05-A	1/4 Female BSPT	6000 (414)	3000 (207)											
BV□□-FRP4-05-A	1/4 Female BSPP	6000 (414)	3000 (207)	1.51 (38.4)	1.65 (41.9)			0.48 (12.2)	1.24 (31.5)	0.59 (25.0)	2.64 (67.0)	0.77 (19.6)	0.25 (6.4)	
BV□□-FNS4-05-A	1/4 Female NPT	6000 (414)	3000 (207)											
BV□□-RT4-05-A	1/4 Male BSPT	6000 (414)	3000 (207)											
Bv□□-BP4-05-A	1/4 Male BSPP	6000 (414)	3000 (207)											
BV□□-NS4-05-A	1/4 Male NPT	6000 (414)	3000 (207)	1.62 (41.1)	1.76 (44.6)									
BV□□-RT6-05-A	3/8 Male BSPT	6000 (414)	3000 (207)											
BV□□-BP6-05-A	3/8 Male BSPP	6000 (414)	3000 (207)											
BV□□-NS6-05-A	3/8 Male NPT	6000 (414)	3000 (207)											

Basic Ordering Number	Connection Type and Size Connection 1/2	Orifice in. (mm)	Cv	Dimensions, in. (mm)									
				B	C	D	E	F	G	H	I		
BV□□-FL8-10-A	1/2" FITOK	0.37 (9.5)	3.48	2.34(59.4)	2.68(68.1)	0.71 (18.0)	1.54 (39.0)	1.42 (36.0)	3.78 (96.0)	0.90 (22.9)	0.38 (9.7)		
BV□□-FL12-10-A	3/4" FITOK			2.33 (59.2)	2.67 (67.9)								
BV□□-ML12-10-A	12 mm FITOK												
BV□□-ML14-10-A	14 mm FITOK												
BV□□-ML16-10-A	16 mm FITOK												
BV□□-ML18-10-A	18 mm FITOK												
BV□□-ML20-10-A	20 mm FITOK												
BV□□-ML22-10-A	22 mm FITOK												
BV□□-FRT6-10-A	3/8 Female BSPT											1.95 (49.5)	2.29 (58.2)
BV□□-FRP6-10-A	3/8 Female BSPP												
BV□□-FNS6-10-A	3/8 Female NPT												
BV□□-FRT8-10-A	1/2 Female BSPT											2.15 (54.6)	2.49 (63.3)
BV□□-FRP8-10-A	1/2 Female BSPP												
BV□□-FNS8-10-A	1/2 Female NPT												
BV□□-FRT12-10-A	3/4 Female BSPT											2.25 (57.1)	2.59 (65.8)
BV□□-FRP12-10-A	3/4 Female BSPP												
BV□□-FNS12-10-A	3/4 Female NPT												
BV□□-RT8-10-A	1/2 Male BSPT											2.22 (56.4)	2.56 (65.1)
BV□□-BP8-10-A	1/2 Male BSPP												
BV□□-NS8-10-A	1/2 Male NPT												
BV□□-RT12-10-A	3/4 Male BSPT												
BV□□-BP12-10-A	3/4 Male BSPP												
BV□□-NS12-10-A	3/4 Male NPT												

- FITOK means FITOK double ferrule tube fittings.
- Sizes and types listed are standard. Other sizes and types are available upon request, please contact FITOK Group or our authorized distributors.
- Dimensions are shown with tube fitting nuts finger-tightened. All dimensions are for reference only and are subject to change.
For dimensions not shown above, please contact FITOK Group or our authorized distributors.

Locking Device

Locking Device 1

- Locks BV series 2-way or 3-way valves, featuring a locking hole diameter of 0.21 in (5.2 mm).
- To order a ball valve with Locking Device 1, add - L to the valve ordering number.
Example: BVSS-ML12-10- L/BVSS-ML12-10-3- L



Locking Device 1

Locking Device 2

- Locks BV series 2-way or 3-way valves, featuring different locking hole diameters:
 - 0.21 in (5.2 mm) for valves with orifice designators 05 and 06
 - 0.34 in (8.7 mm) for valves with orifice designator 10
- To order a ball valve with Locking Device 2, add - LP to the valve ordering number.
Example: BVSS-ML12-10-LP/BVSS-ML12-10-3-LP
- No impact on panel mounting.
- Locking device kits are also available for individual purchase to add locking functionality to your existing standard manual ball valves, with ordering information as follows:



Locking Device 2

Locking Device 2 Kits

Name	Valve Orifice	Locking Hole Diameter	Kit Ordering Number	Content
Locking Device Kits	05, 06	0.21 in (5.2 mm)	BVS4-06-LP-RK	Upper lock plate, lower lock plate
	10	0.34 in (8.7 mm)	BVS4-10-LP-RK	

Ball Valve without Handle

- Ball Valve without handle can be directly connected to the FITOK actuator assembly.
- To order, please add -AM to the valve ordering number.
Example: BVSS-FL4-05-AM

Ordering Number Description

BVSS - FL8 - ML12 - ML10 - P06 - RXHQ3 - L - SCEF2

Series	Body Material	Connection 1 Type	Connection 1 Size	Connection 2/3 Type	Connection 2/3 Size	Seat Material	Orifice Size	Handle/ Actuator	For Actuator	Flow Pattern	Locking Device	Special Application	Cleaning and Packaging			
BV	SS 6L S4 B	CF8M CF3M CF8 Brass	FNS NS FRT RT FMS MS FRP BP FL ML UFB UMB UPB	Female NPT Male NPT Female BSPT Male BSPT Female Metric Thread (for RG-M) Male Metric Thread (for RG-M) Female BSPP (For RP) Male BSPP (For RG) Fractional Tube Fitting Metric Tube Fitting Rotatable Fractional Tube Butt Weld Rotatable Metric Tube Butt Weld Rotatable Pipe Butt Weld	2 3 4 5 6 8 10 12 14 16 18 20 22 24	1/8" 3 mm 1/4" 5/16" 3/8" or 6 mm or M6 x 1 1/2" or 8 mm 10 mm or M10 x 1 3/4" or 12 mm 14 mm or M14 x 1.5 16 mm 18 mm 20 mm or M20 x 1.5 22 mm or M22 x 1.5 M24 x 1.5	Same as Connection 1 Specified in the same way as Connection 1 type and size	PTFE K PCTFE P PEEK	02 03 04 05 06 10	0.09" (2.4 mm) 0.13" (3.2 mm) 0.17" (4.2 mm) 0.19" (4.7 mm) 0.25" (6.4 mm) 0.41" (10.3 mm)	I GR J Y U AM C O D LX RX DX E EX	Black Nylon Handle Red Nylon Handle Green Nylon Handle Blue Nylon Handle Yellow Nylon Handle Black Aluminium Handle Without Handle 90° Normally Closed Pneumatic Actuator 90° Normally Open Pneumatic Actuator 90° Double Acting Pneumatic Actuator 180° Left End Normally Open Pneumatic Actuator 180° Right End Normally Open Pneumatic Actuator 180° Double Acting Pneumatic Actuator 90° Electric Actuator 180° Electric Actuator	H N Q HQ NQ	None Mechanical Limit Switch Inductive Limit Switch Solenoid Valve Mechanical Limit Switch and Solenoid Valve Inductive Limit Switch and Solenoid Valve	No L Locking Device 1 LP Locking Device 2 Straight A Angle (Bottom Port Inlet) 3 3-Way (Diverter Valve)	None S NACE MR0175 CE CE Certification FC-01 F2 FC-02

Note: "Ordering Number Description" is a reference to understand the combination rules of FITOK product part number. Not all combinations are available.

- Standard thread pitch for metric threads are as follows:
M10 and below: 1 mm
M12 to M24: 1.5 mm
Standard thread pitch should be omitted in the ordering number, others should be specified.
- For oxygen-enriched environment or hazardous media service, contact FITOK Group or our authorized distributors.
- Cleaning and Packaging:
FC-01: Standard cleaning and packaging for general industrial procedures.
FC-02: Special cleaning and packaging for wetted system components to ensure compliance with product cleaning requirement of ASTM G93 Level C.
- For more information about pneumatic actuator ball valves, please refer to the catalog Actuated Ball Valves.
- Inert Silicon Coating: Except for ball valves with PEEK seat, wetted metal components Inert Silicon coated.
- CE certification is available. For more information, please contact FITOK group or our authorized distributors

High Temperature Metal-Seated Ball Valves

BK Series

Features

- Working pressures up to 1,000 psig (69 bar)
- Working temperature: -65°F to 662°F (-54°C to 350°C)
- Suitable for high-temperature and high-viscosity liquid media
- Floating ball design paired with disc-spring-loaded metal seats to compensate for seat wear and pressure/temperature changes, improving leak-tight integrity
- Blowout-proof stem minimizes failures caused by stem movement or looseness
- Each valve meets FCI 70-2 Class VI low pressure gas tightness and ISO 5208 Rate D high pressure liquid test requirements




Technical Data

Orifice, in. (mm)	0.5 (12.7), 1 (25.4)	
Material	316/304 SS	
Connection Type	FITOK Tube Fitting	Weld Fitting
Temperature, °F (°C)	-65 (-54) to 662 (350)	
Working Pressure, psig (bar)	1000 (69)	

Standard Materials of Construction

Ball Valves
Plug Valves

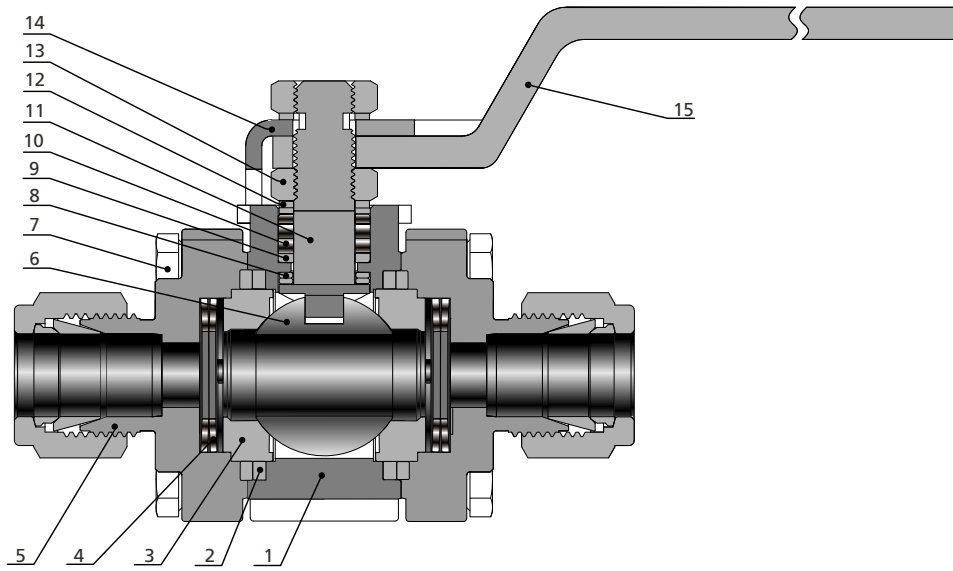


Item	Component	Material	
1	Body	<i>CF8M/A351</i>	<i>CF8/A351</i>
2	Flange Seal	Graphite	
3	Seat	<i>316 SS/A479, hardfacing stellite</i>	<i>304 SS/A479, hardfacing stellite</i>
4	Disc Spring	A75	
5	End Connection	<i>CF8M/A351</i>	<i>CF8/A351</i>
6	Ball	<i>316/304 SS, HVOF-sprayed Cr3C2/NiCr coatings</i>	
7	Hex Bolt (Full Thread)	Stainless Steel	
8	Stem Bearing	Stellite 6/A479	
9	Stem Washer	316 SS/A479	
10	Packing	Graphite	
11	Stem	316 SS/A479	
12	Stem Spring	Strain-hardened 316 SS/A240	
13	Hex Nut	Stainless Steel	
14	Stop Plate	304 SS/A240	
15	Handle	304 SS/A240	

Note: Wetted components are listed in italics. For other materials, please contact FITOK Group or our authorized distributors.

Dimensions


Dimensions are for reference only and are subject to change.

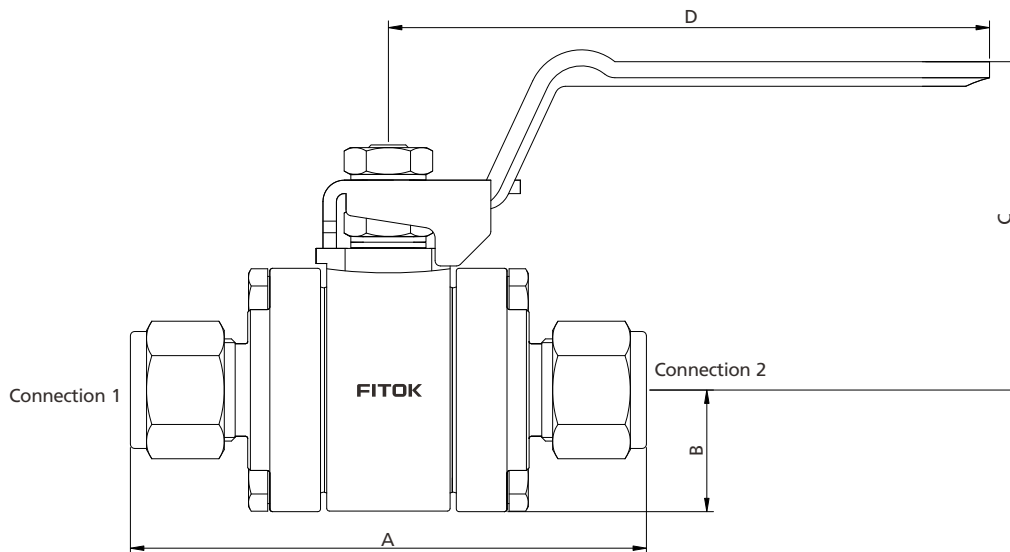

Basic Ordering Information	Connection Type		Orifice in. (mm)	Dimensions, in. (mm)			
	Connection 1	Connection 2		A	B	C	D
BK□□-FL8-13G	1/2" FITOK	1/2" FITOK	0.41 (10.4)	3.79 (96.2)	0.89 (22.7)	2.25 (57.1)	6.5 (165)
BK□□-FL10-13G	5/8" FITOK	5/8" FITOK	0.5 (12.7)	3.79 (96.2)	0.89 (22.7)	2.25 (57.1)	6.5 (165)
BK□□-FL12-13G	3/4" FITOK	3/4" FITOK		3.92 (99.6)	0.89 (22.7)	2.25 (57.1)	6.5 (165)
BK□□-ML16-13G	16 mm FITOK	16 mm FITOK		3.92 (99.6)	0.89 (22.7)	2.25 (57.1)	6.5 (165)
BK□□-ML18-13G	18 mm FITOK	18 mm FITOK		3.91 (99.4)	0.89 (22.7)	2.25 (57.1)	6.5 (165)
BK□□-TB12-13G	3/4" x 0.120" Tube Butt Weld	3/4" x 0.120" Tube Butt Weld		3.8 (96.6)	0.89 (22.7)	2.25 (57.1)	6.5 (165)
BK□□-TS12-13G	3/4" Tube Socket Weld	3/4" Tube Socket Weld		3.2 (80.2)	0.89 (22.7)	2.25 (57.1)	6.5 (165)
BK□□-PB8-13G	1/2 x SCH80 Pipe Butt Weld	1/2 x SCH80 Pipe Butt Weld		3.24 (82.34)	0.89 (22.7)	2.25 (57.1)	6.5 (165)
BK□□-PB12-13G	3/4 x SCH80 Pipe Butt Weld	3/4 x SCH80 Pipe Butt Weld		3.24 (82.34)	0.89 (22.7)	2.25 (57.1)	6.5 (165)
BK□□-TB24-25G	1 1/2" x 0.197" Tube Butt Weld	1 1/2" x 0.197" Tube Butt Weld	1 (25.4)	—	—	—	—
BK□□-TS20-25G	1 1/4" Tube Socket Weld	1 1/4" Tube Socket Weld		—	—	—	—
BK□□-PB20-25G	1 1/4 x SCH80 Pipe Butt Weld	1 1/4 x SCH80 Pipe Butt Weld		—	—	—	—

1. Connection type of "FITOK" means FITOK double ferrule tube fittings.
2. Sizes and types listed are standard. Other sizes and types are available upon request. For details, please contact FITOK Group or our authorized distributors.
3. Dimensions are shown with FITOK tube fitting nuts finger-tight. For dimensions not shown above, please contact FITOK Group or our authorized distributors.

Ordering Number Description

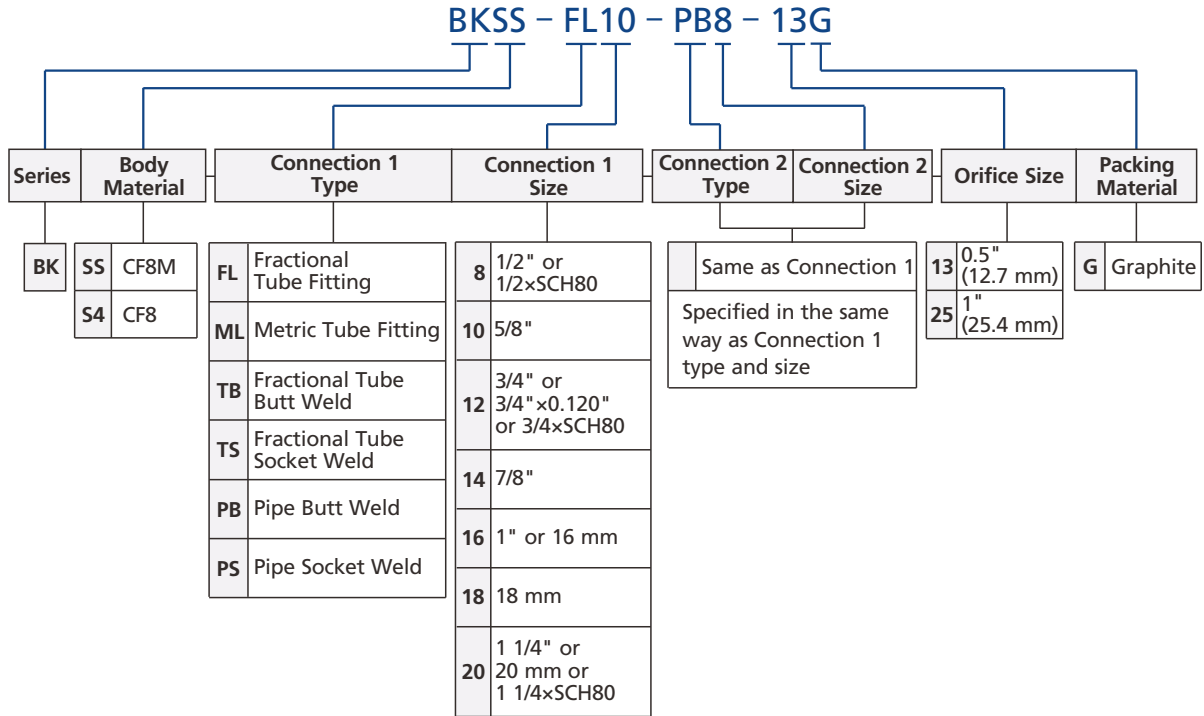

1. If you need a port with orbital welding, please contact FITOK Group.


Note: "Ordering Number Description" is a reference to understand the combination rules of FITOK product part number. Not all combinations are available.

Alternative Fuel Service (AFS) Ball Valves

BU Series

Features

- ⦿ Working pressures up to 6,000 psig (414 bar)
- ⦿ Working temperature: -40 to 250°F (-40 to 121°C)
- ⦿ Cv up to 13.8
- ⦿ No packing adjustment required
- ⦿ Field repairable with seal kit
- ⦿ Floating ball design paired with disc-spring-loaded seats to compensate for seat wear and pressure/temperature changes, improving leak-tight integrity
- ⦿ Each valve is factory leak-tested with nitrogen or compressed air at rated pressure
- ⦿ Available with ECE R110 type approval

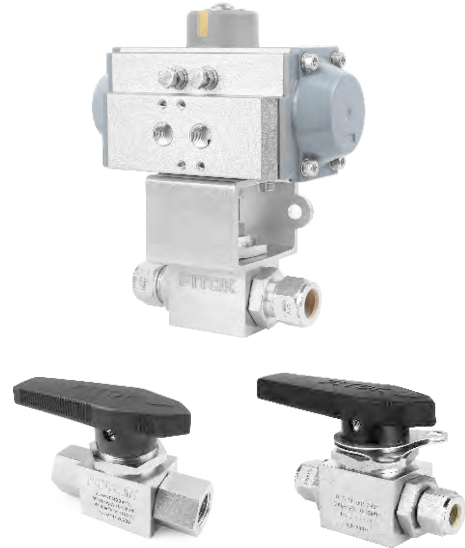


Pressure VS Temperature Ratings

End Connection	FITOK Tube Fitting			Female Pipe	
	3/8, 1/2 in., 12 mm	3/4 in., 16 mm	1 in.	3/8, 1/2 in.	3/4 in.
Temperature °F (°C)	Working Pressure, psig (bar)				
-40 (-40) ~ 250 (121)	6000 (414)	5800 (400)	4700 (324)	6000 (414)	6000 (414)

Note: Ratings are based on valves of standard materials.

Standard Materials of Construction

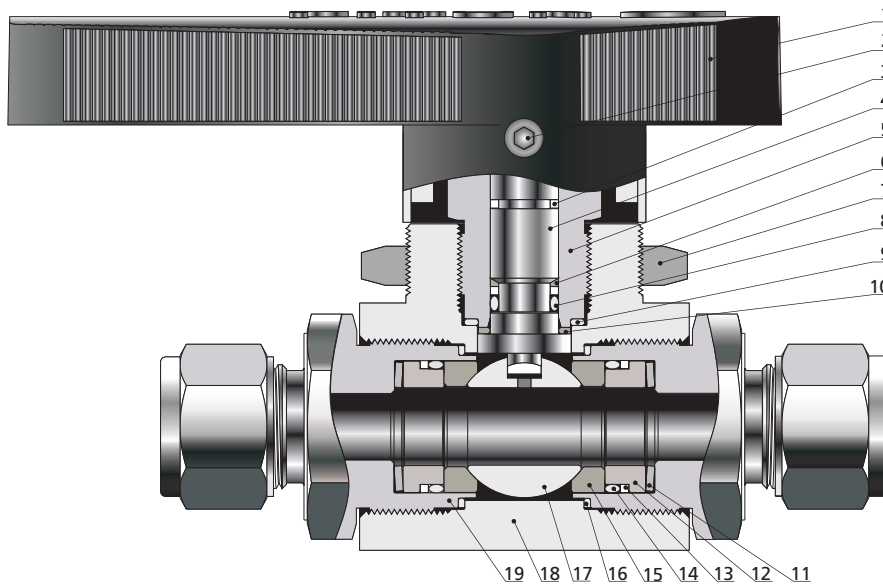


Ball Valves
Plug Valves

Item	Component	Material/ASTM Specification
1	Handle	Nylon with stainless steel insert
2	Set screw	Zinc-plated carbon steel
3	<i>Guide ring</i>	<i>PTFE/D1710</i>
4	<i>Stem</i>	<i>316 SS/A479</i>
5	<i>Packing bolt</i>	<i>316 SS/A479</i>
6	<i>Stem backup ring</i>	<i>PEEK</i>
7	Lock nut	316 SS/A479
8	<i>Stem O-ring</i>	<i>Low-temperature fluorocarbon</i>
9	<i>Packing bolt washer</i>	<i>Silver-plated 316 SS/A269</i>
10	<i>Thrust washer</i>	<i>PEEK</i>
11	<i>Coned-disc spring</i>	<i>316 SS/A240</i>
12	<i>Seat gland</i>	<i>316 SS/A479</i>
13	<i>Seat backup ring</i>	<i>PTFE/D1710</i>
14	<i>Seat O-ring</i>	<i>Low-temperature fluorocarbon</i>
15	<i>Seat</i>	<i>PEEK</i>
16	<i>End connection gasket</i>	<i>Silver-plated 316 SS/A269</i>
17	<i>Ball</i>	<i>316 SS/A479</i>
18	<i>Body</i>	<i>316 SS/A479</i>
19	<i>End connection</i>	<i>316 SS/A479</i>
	<i>Lubricant</i>	<i>PTFE-based</i>

Note: Wetted components listed in italics.

Dimensions

Dimensions in in. (mm) are for reference only and subject to change.

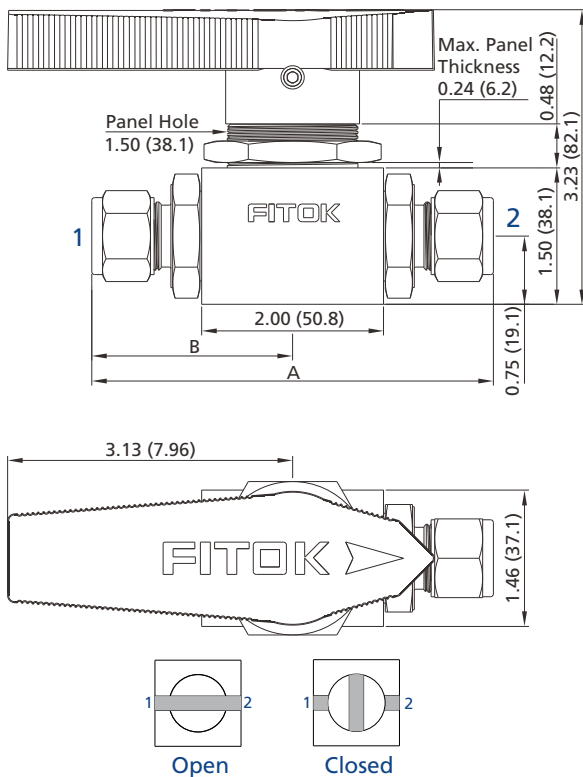

Ordering Number	Connection ^① Type and Size	Cv	Orifice in. (mm)	Dimensions in. (mm)	
				A	B
BUSS-ML10-P12	10 mm FITOK	4.2	0.31 (7.9)	4.21 (107)	2.11 (53.5)
BUSS-ML12-P12	12 mm FITOK	5.2	0.41 (10.3)	4.42 (112.2)	2.21 (56.1)
BUSS-ML16-P12	16 mm FITOK	12.4	0.47 (12.0)	4.42 (112.3)	2.21 (56.2)
BUSS-FL6-P12	3/8" FITOK	4.0	0.28 (7.1)	4.20 (106.6)	2.10 (53.3)
BUSS-FL8-P12	1/2" FITOK	7.2	0.41 (10.3)	4.40 (111.8)	2.20 (55.9)
BUSS-FL12-P12	3/4" FITOK	7.1	0.47 (12.0)	4.50 (114.3)	2.46 (62.5)
BUSS-FL16-P12	1" FITOK	6.5	0.47 (12.0)	4.93 (125.1)	2.25 (57.1)
BUSS-FNS6-P12	3/8" Female NPT	11.0	0.47 (12.0)	4.01 (102)	2.00 (50.8)
BUSS-FNS8-P12	1/2" Female NPT	13.8		4.01 (102)	2.00 (50.8)
BUSS-FNS12-P12	3/4" Female NPT	7.8		4.13 (105)	2.06 (52.3)
BUSS-FRT8-P12	1/2" Female BSPT	13.8		4.01 (102)	2.00 (50.8)

Note: Dimensions shown with FITOK tube fitting nuts finger-tight. Valves can be ordered with two different end connections. Contact FITOK Group or our authorized distributors. Not recommended for panel mounting; not available with pneumatic actuator.

CNG/NGV Application

ECE R110 Manual Service Valve Type Approval

Classification: Class 0

Temperature: -40 to 248°F (-40 to 120°C)

Pressure: 3770 psig (260 bar)

To order, add **-R110** to the valve ordering number.

Example: BUSS-ML12-P12-**R110**

Seal kit for field replacement is available, see "Seal Kits".

Seal Kits

Seal Kit Name	Seal Kit Ordering Number	Seal Kit Content
Seat seal kit	SS-BU-P-SE	Seat, seat backup ring, seat O-ring, coned-disc spring, end connection gasket, instructions.
Stem and seat seal kit	SS-BU-P	Guide ring, stem backup ring, stem O-ring, packing bolt washer, thrust washer, seat, seat backup ring, seat O-ring, coned-disc spring, end connection gasket, instructions

Locking Device

Locking Device 1

- Locks BU series valves, featuring a locking hole diameter of 0.21 in (5.2 mm).
- To order a ball valve with Locking Device 1, add - L to the valve ordering number.
Example: BUSS-ML12-P12- L



Locking Device 1

Locking Device 2

- Locks BU series valves, featuring a locking hole diameter of 0.34 in (8.7 mm).
- To order a ball valve with Locking Device 2, add - LP to the valve ordering number.
Example: BUSS-ML12-P12-LP
- No impact on panel mounting.
- Locking device kits are also available for individual purchase to add locking functionality to your existing standard manual ball valves, with ordering information as follows:



Locking Device 2


Locking Device 2 Kits

Name	Kit Ordering Number	Content
Locking Device Kits	BU54-12-LP-RK	Upper lock plate, lower lock plate, handle, hexagon socket set screws

Ball Valve without Handle

- Ball Valve without handle can be directly connected to the FITOK actuator assembly.
- To order, please add -AM to the valve ordering number.
Example: BUSS-FL8-P12-AM

Ordering Number Description

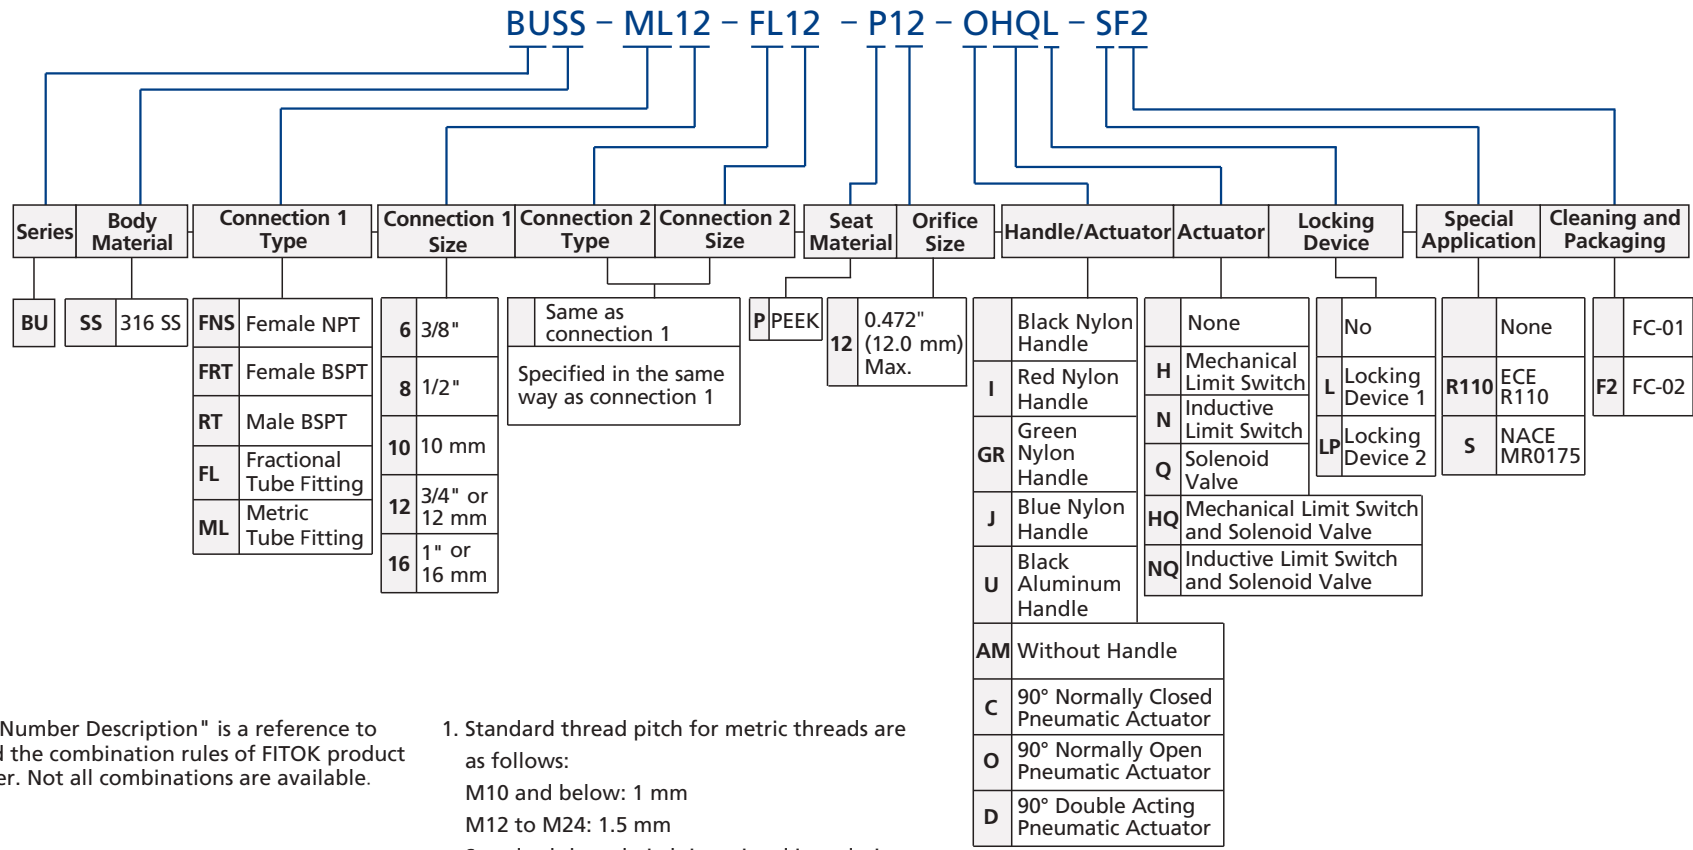

Note: "Ordering Number Description" is a reference to understand the combination rules of FITOK product part number. Not all combinations are available.

- Standard thread pitch for metric threads are as follows:
M10 and below: 1 mm
M12 to M24: 1.5 mm
Standard thread pitch is omitted in ordering number.
For special thread pitch, specify in the ordering number.
- For oxygen-enriched environment or hazardous media service, contact FITOK Group or our authorized distributors.
- Cleaning and Packaging:
FC-01: Standard cleaning and packaging for general industrial procedures.
FC-02: Special cleaning and packaging for wetted system components to ensure compliance with product cleaning requirement of ASTM G93 Level C.
- For more details about ball valves with pneumatic actuators, refer to Actuated Ball Valves.
- Certifications do not include attachments to the valve, such as actuators or a different handle mechanism.